


DOLOMITE CYM 600 | outdoor use



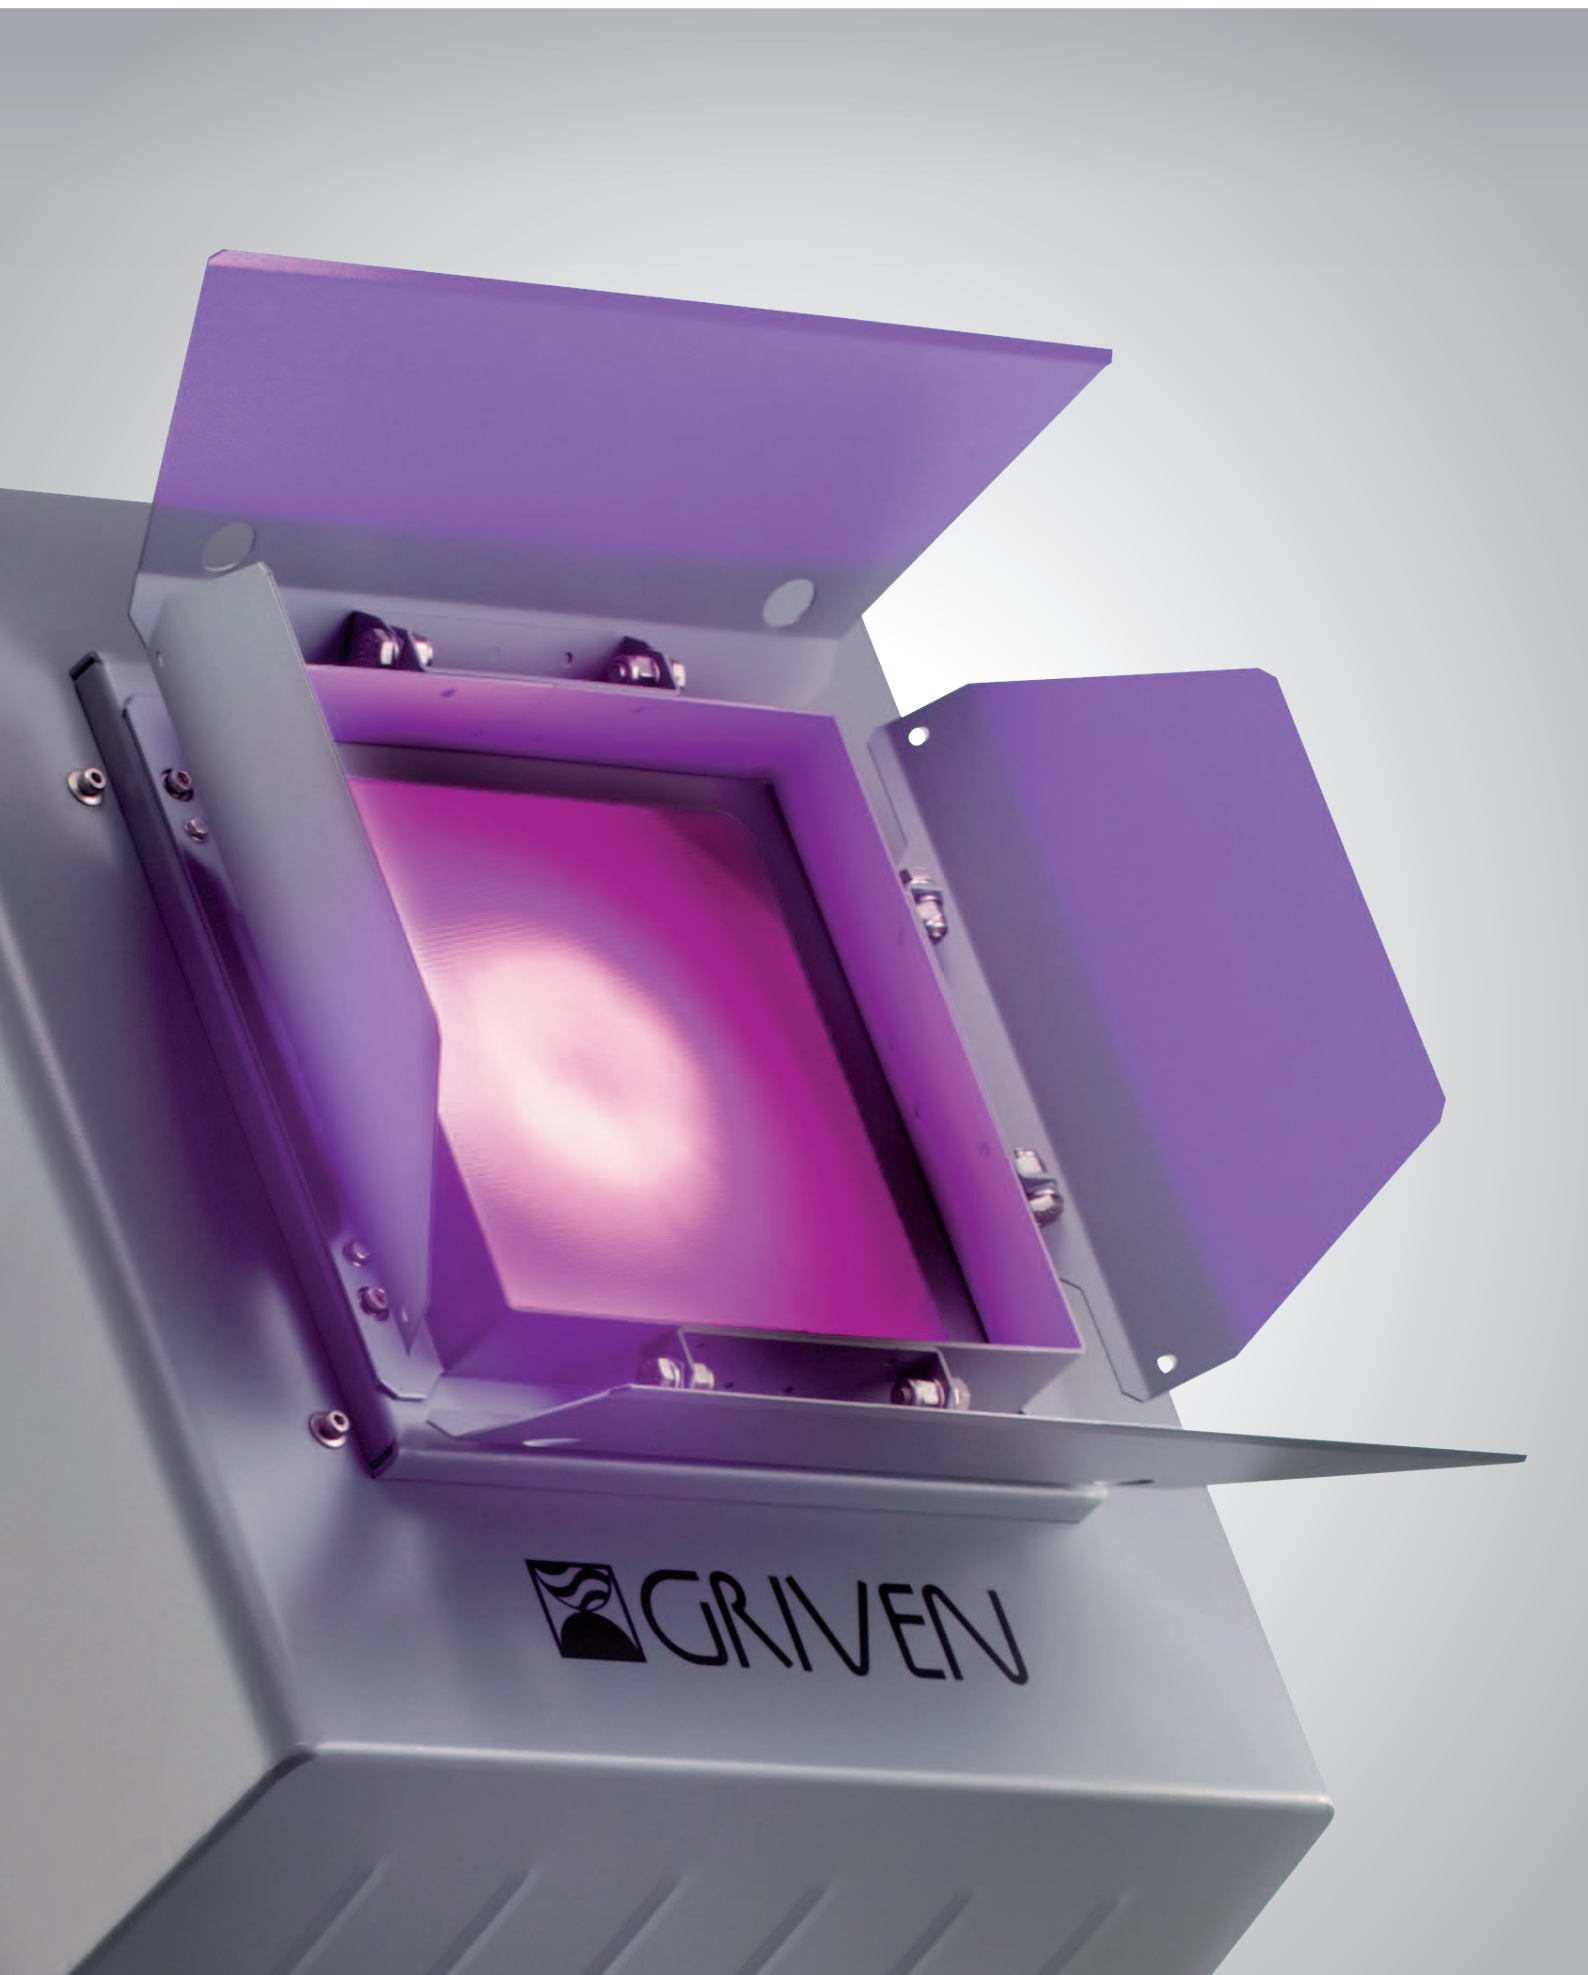

## SURFACE MOUNT SOLUTIONS DOLOMITE

DOLomite CYM 600, using a short arc MSD 575W lamp combined with an ellipsoidal optical system, produces a narrow concentrated long-throw beam to light adjacent or distant areas with high brightness and even coverage. Colour sequences and blends can be selected from a pre-programmed internal controller, with multiple unit synchronisation possible, or controlled from any DMX512 control system.

Wireless DMX version is available on request.

DOLomite CYM 600, con una lampada MSD da 575W ad arco corto ed un sistema ottico ellissoidale, genera un fascio luminoso potente ed uniforme in grado di illuminare aree a media distanza con una distribuzione omogenea del colore. Un sistema di controllo interno pre-programmato offre la possibilità di selezionare sequenze di colori e di sincronizzare più unità, che possono peraltro essere gestite tramite protocollo DMX512. Su richiesta è disponibile la versione DMX wireless.

# DOLOMITE CYM 600 | outdoor use

## TECHNICAL SPECIFICATIONS

MSD 575W metal halide lamp  
 Lamp life: 3000 hours  
 The optical system utilises an aluminium ellipsoidal reflector and produces a soft edge beam of approximately 19°  
 CYM colour changer system  
 Variable speed blackout effect  
 Mechanical linear dimmer function  
 2.6 fps mechanical strobe system  
 DMX (also wireless on request), automatic and Master-Slave mode  
 Power supply:  
 200÷220V / 230÷250V / 50-60Hz  
 Power consumption:  
 4.3A @ 230V 730W max  
 Electrical class: I  
 Meets CE safety standards  
 Pressure diecast aluminium body  
 with an adjustable mounting yoke  
 IP65  
 Unit: 24 Kg  
 Ballast: 12.5 Kg

## SPECIFICHE TECNICHE

Lampada a ioduri metallici MSD 575W  
 Durata: 3000 ore  
 Il sistema ottico utilizza un riflettore ellissoidale in alluminio e produce un fascio di luce uniforme dai contorni sfumati di circa 19°  
 Sistema sottrattivo di miscelazione del colore (CYM)  
 Effetto blackout a velocità variabile  
 Dimmer meccanico lineare  
 Strobo meccanico a 2,6 fps  
 Funzionamento in automatico, modalità Master-Slave e controllo remoto DMX (anche wireless su richiesta)  
 Alimentazione:  
 200÷220V / 230÷250V / 50-60Hz  
 Consumo:  
 4,3A @ 230V 730W max  
 Classe elettrica: I  
 Rispetta le norme CE  
 Corpo in alluminio pressofuso con staffa di montaggio regolabile  
 IP65  
 Proiettore: 24 Kg  
 Ballast: 12,5 Kg

## ACCESSORIES / ACCESSORI




**AD3227** EXPANSION FILTER




**AD4118** POWER CDI COMMANDER  
**AD4119** POWER CDI COMMANDER PLUS



**AD4126** IP65 DMX CONTROLLER MK2




**AD3439** NARROW BEAM FILTER  
**AD3231** JUMBO WIDE ANGLE



**AD3238** FIXING PLATE



**AL3362** IP20 WIRELESS DMX TRANSMITTER  
**AL3364** IP65 WIRELESS DMX TRANSMITTER  
**AL3366** IP65 WIRELESS DMX REPEATER




**AD3236** B-HIVE BEAM SHIELD



**AD3216** BARNDOOR



**AL3360** IP65 WIRELESS DMX RECEIVER



**AD3237** LAMELLAR SHIELD



**LP0997** MSD 575W LAMP



**AL1424** WALL-TSC





**AD4125** POWER CDI COMMANDER PLUS


## CODES / CODICI


AD3436 DOLOMITE CYM 600

IP65 / CE

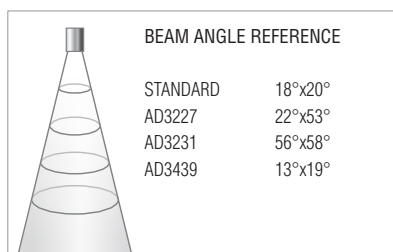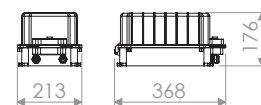

PHOTOMETRIC DETAILS  
 AVAILABLE ON OUR WEBSITE  
 DATI FOTOMETRICI DISPONIBILI  
 SUL NOSTRO SITO

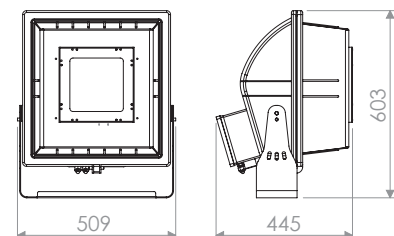

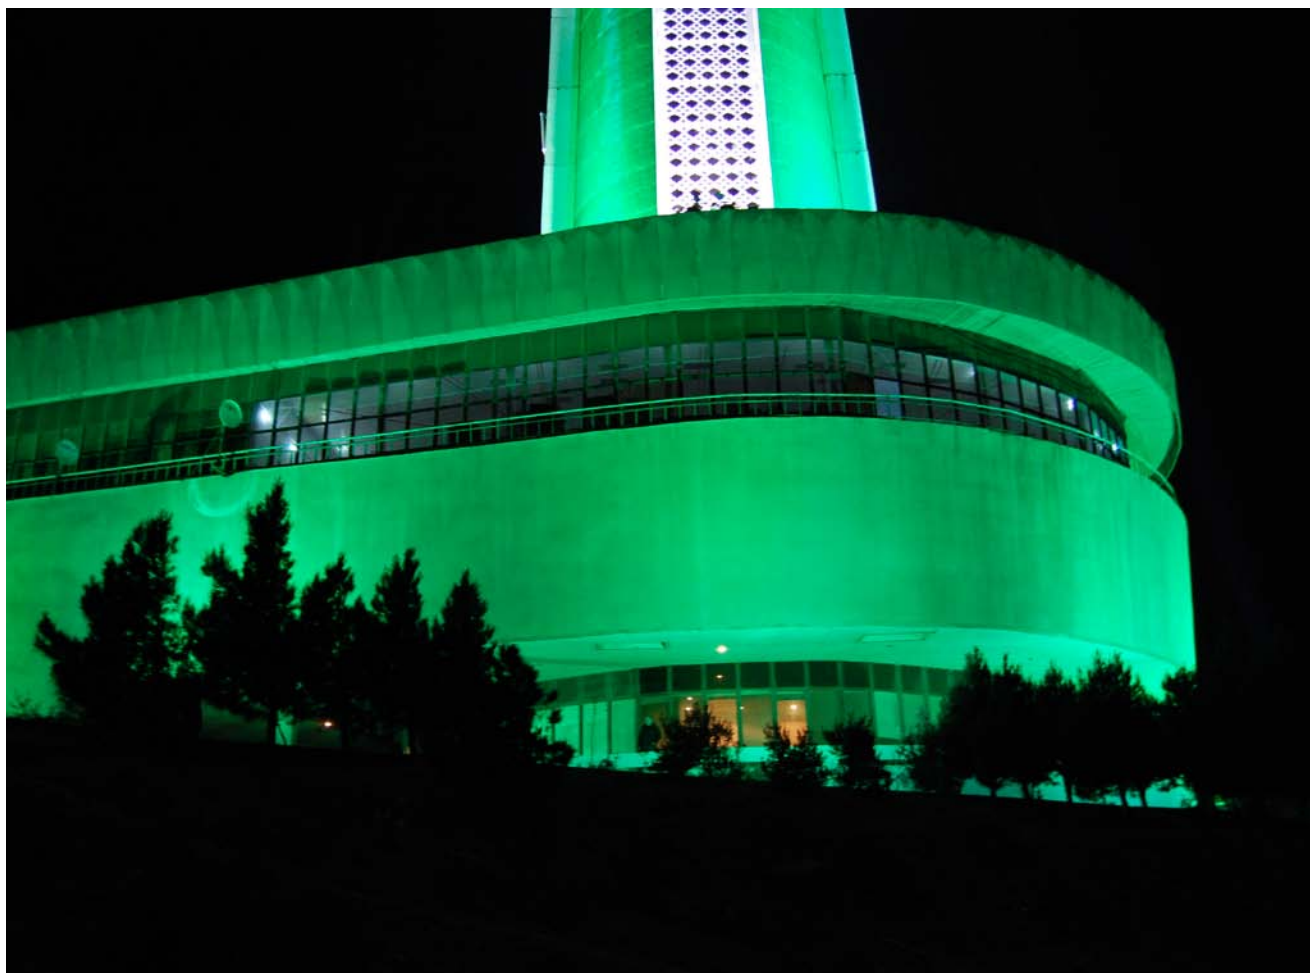

THE OUTDOOR CYM DIMENSION



**EVEN  
COLOUR  
COVERAGE**

