


PARADE X-18 36 | outdoor use



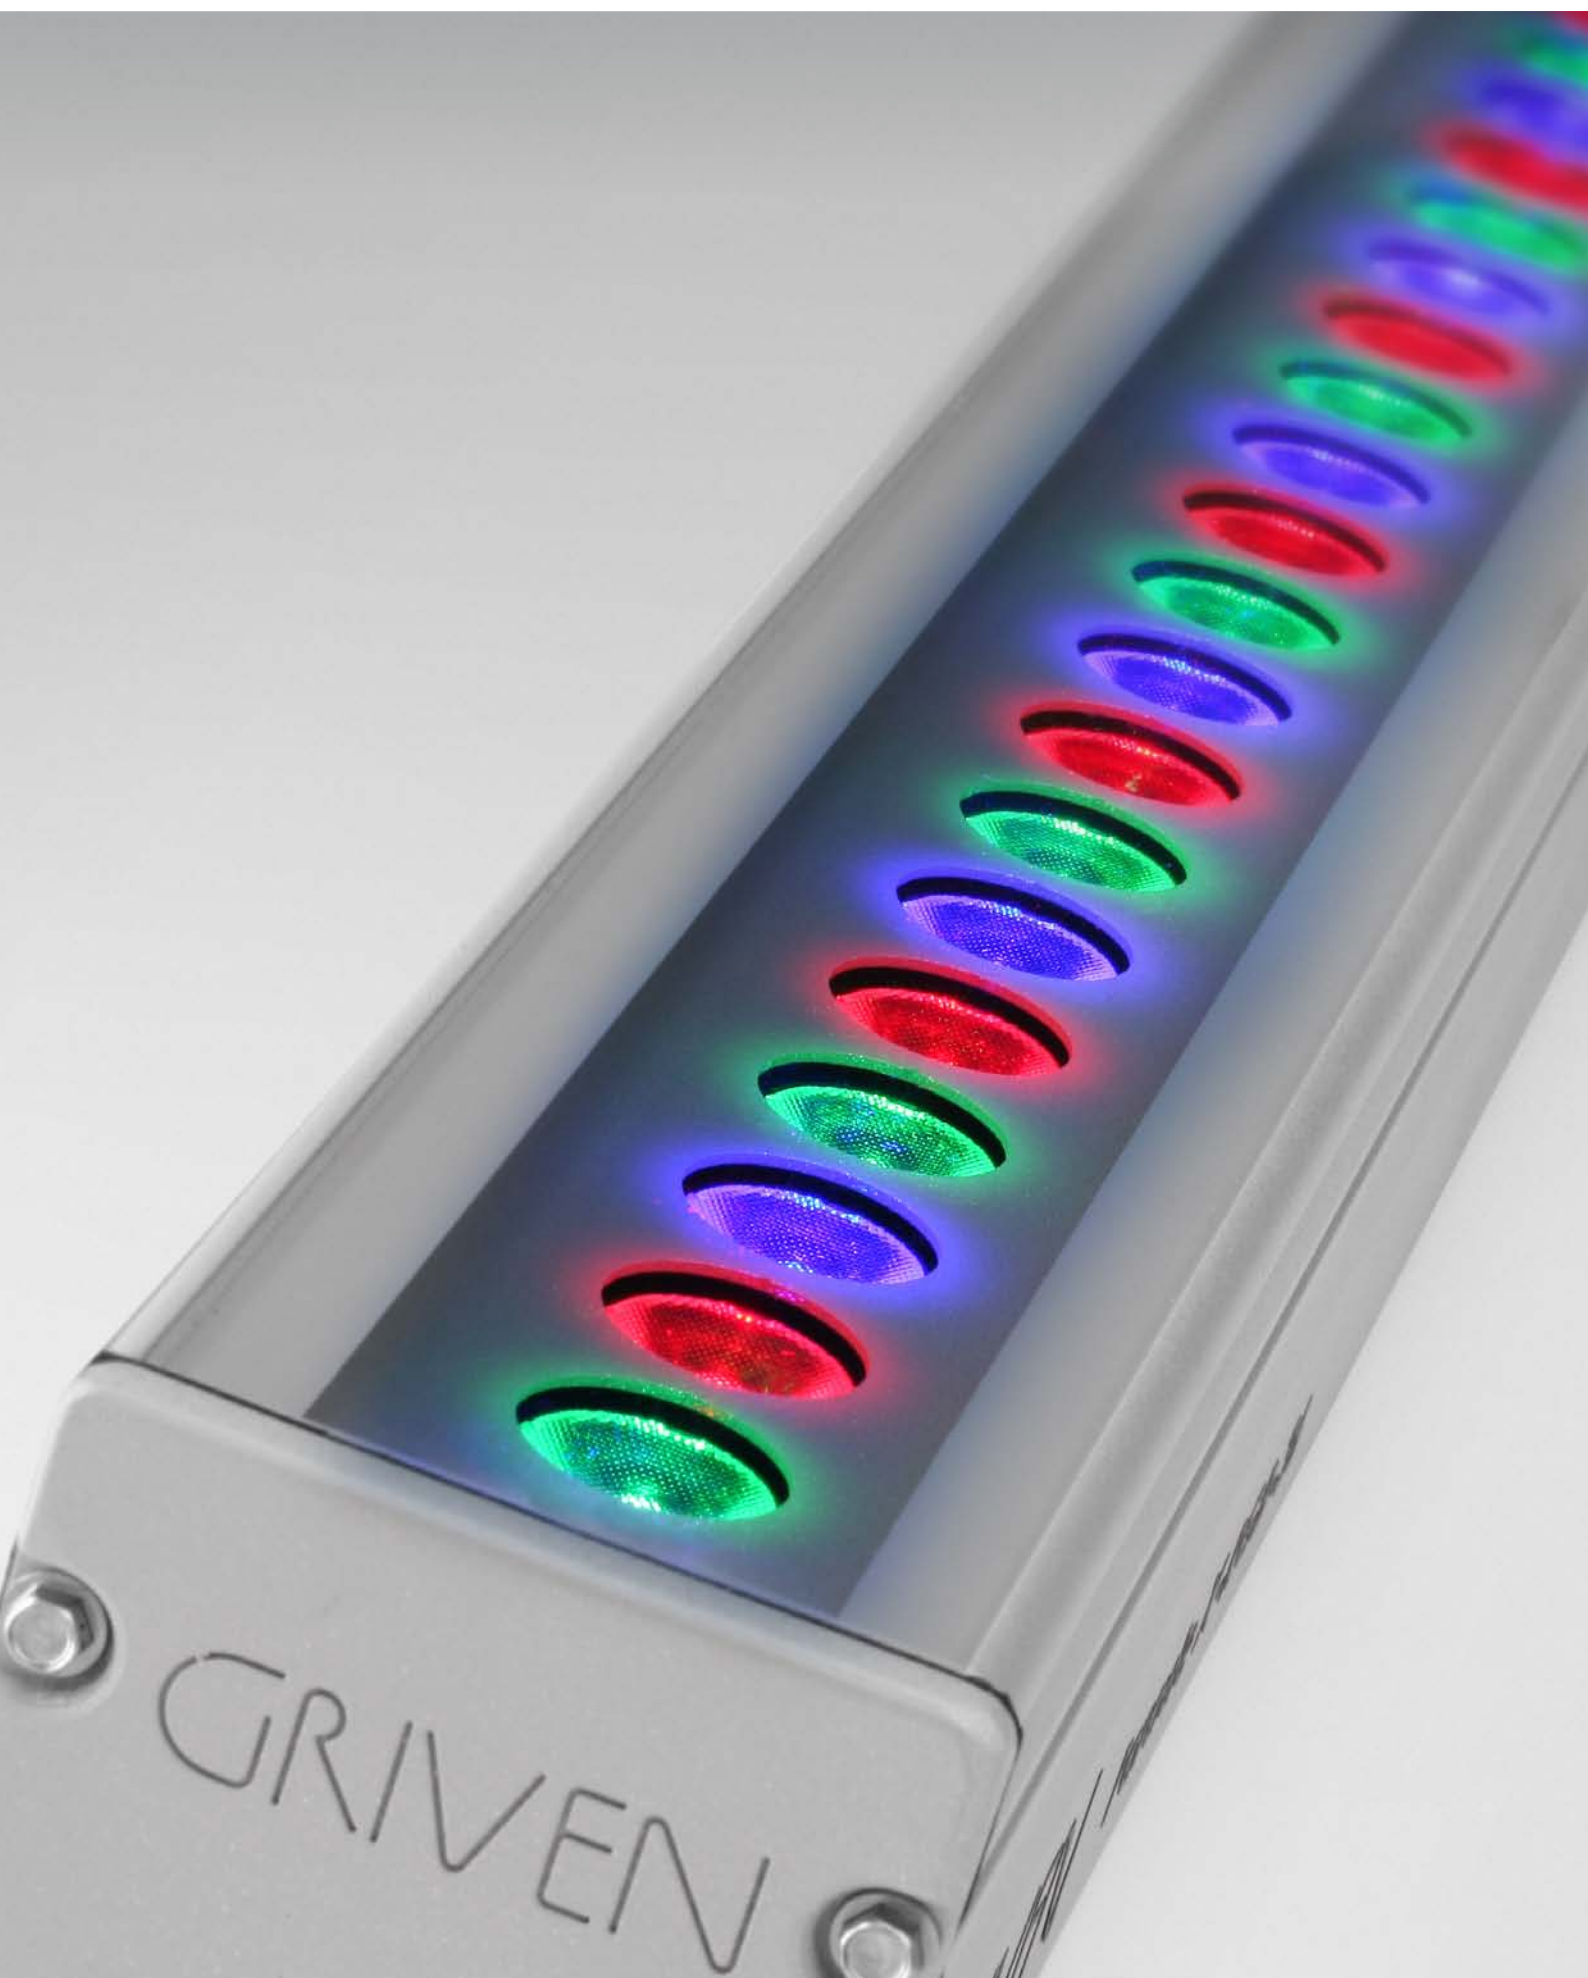

SURFACE MOUNT SOLUTIONS PARADE X-18 36

PARADE X-18 and 36 are the leading edge high luminance flagships of the linear LED modules by GRIVEN. The unquestionably powerful luminous flux, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 18 or 36 RGB, warm or cold LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. PARADE X-18 and 36 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions. Cool or warm white temperature LEDs setups allow for the maximum lighting design flexibility.

I moduli PARADE X-18 e 36 sono i nuovi punti di riferimento della performante serie lineare a LED di GRIVEN. Il potente flusso luminoso, in combinazione con gruppi ottici di nuova generazione, garantisce un ineguagliabile effetto di illuminazione radente su elementi architettonici di dimensioni fino ad ora proibitive. Le versioni con LED a temperatura colore bianco caldo o freddo, unitamente alla gamma RGB, assicurano la massima flessibilità progettuale grazie ad un'ottimale distribuzione fotometrica e ad un'emissione luminosa di qualità superiore. In PARADE X-18 e 36 la cura del nuovo design comprende anche il pannello di controllo integrato per un accesso completo ed immediato a tutte le funzioni digitali.

PARADE X-18 36 | outdoor use

TECHNICAL SPECIFICATIONS

18 or 36 high brightness RGB or white power LEDs unit
 Continuously variable light intensity
 DMX , automatic and Master-Slave mode
 Remote firmware update (RFU)
 RDM function
 Power supply:
 standard 100-240V / 50-60Hz
 Power consumption:
 X-18 0.2A @ 230V / 42W max
 X-36 0.4A @ 230V / 84W max
 Electrical class: I
 Self-resetting fuse protection
 Integrated electronic thermal protection management
 Meets CE safety standards
 Extruded aluminium body
 IP67
 Operating temperature: -30°C to 50°C (-22°F to 122°F)
 X-18: 2.8 Kg
 X-36: 4.5 Kg

SPECIFICHE TECNICHE

Barra modulare con 18 o 36 LED di potenza RGB o bianchi
 Intensità luminosa variabile
 Funzionamento in automatico, modalità
 Master-Slave e controllo remoto DMX
 Aggiornamento firmware da remoto (RFU)
 Funzione RDM
 Alimentazione: standard 100-240V / 50-60Hz
 Consumo:
 X-18 0,2A @ 230V / 42W max
 X-36 0,4A @ 230V / 84W max
 Classe elettrica: I
 Fusibile di protezione auto-ripristinante
 Protezione termica con controllo elettronico integrato
 Rispetta le norme CE
 Corpo proiettore in alluminio estruso
 IP67
 Temperatura di utilizzo: da -30°C a 50°C
 X-18: 2,8 Kg
 X-36: 4,5 Kg



ACCESSORIES / ACCESSORI



AD4126 IP65 DMX CONTROLLER MK2



AL3360 IP65 WIRELESS DMX RECEIVER



AD4118 POWER CDI COMMANDER 512 (IP65)
AD4119 POWER CDI COMMANDER 1024 (IP65)



AL2660 WEEZERD 1



AD4125 POWER CDI COMMANDER EXTRA (IP20)



AL1424 WALL-TSC



AL1422 LED D.O.P. CONTROLLER MK2



AL3362 IP20 WIRELESS DMX TRANSMITTER
AL3364 IP65 WIRELESS DMX TRANSMITTER
AL3366 IP65 WIRELESS DMX REPEATER

CODES / CODICI

AL3230 PARADE X-RGB-36 SPOT
 AL3232 PARADE X-RGB-36 NARROW
 AL3234 PARADE X-RGB-36 MEDIUM
 AL3236 PARADE X-RGB-36 WIDE
 AL3242 PARADE X-RGB-36 EXTRA WIDE
 AL3238 PARADE X-RGB-36 ELLIPTICAL
 AL3240 PARADE X-RGB-36 ELLIPTICAL WIDE

AL3930 PARADE X-CW-36 SPOT
 AL3931 PARADE X-CW-36 NARROW
 AL3932 PARADE X-CW-36 MEDIUM
 AL3933 PARADE X-CW-36 WIDE
 AL3934 PARADE X-CW-36 EXTRA WIDE
 AL3935 PARADE X-CW-36 ELLIPTICAL
 AL3936 PARADE X-CW-36 ELLIPTICAL WIDE

AL3940 PARADE X-WW-36 SPOT
 AL3941 PARADE X-WW-36 NARROW
 AL3942 PARADE X-WW-36 MEDIUM
 AL3943 PARADE X-WW-36 WIDE
 AL3944 PARADE X-WW-36 EXTRA WIDE
 AL3945 PARADE X-WW-36 ELLIPTICAL
 AL3946 PARADE X-WW-36 ELLIPTICAL WIDE

AL3950 PARADE X-RGB-18 SPOT
 AL3951 PARADE X-RGB-18 NARROW
 AL3952 PARADE X-RGB-18 MEDIUM
 AL3953 PARADE X-RGB-18 WIDE
 AL3954 PARADE X-RGB-18 EXTRA WIDE
 AL3955 PARADE X-RGB-18 ELLIPTICAL
 AL3956 PARADE X-RGB-18 ELLIPTICAL WIDE

AL3960 PARADE X-CW-18 SPOT
 AL3961 PARADE X-CW-18 NARROW
 AL3962 PARADE X-CW-18 MEDIUM
 AL3963 PARADE X-CW-18 WIDE
 AL3964 PARADE X-CW-18 EXTRA WIDE
 AL3965 PARADE X-CW-18 ELLIPTICAL
 AL3966 PARADE X-CW-18 ELLIPTICAL WIDE


AL3970 PARADE X-WW-18 SPOT
 AL3971 PARADE X-WW-18 NARROW
 AL3972 PARADE X-WW-18 MEDIUM
 AL3973 PARADE X-WW-18 WIDE
 AL3974 PARADE X-WW-18 EXTRA WIDE
 AL3975 PARADE X-WW-18 ELLIPTICAL
 AL3976 PARADE X-WW-18 ELLIPTICAL WIDE

IP67 / IK06 / CE

BEAM ANGLE REFERENCE

SPOT	8°
NARROW	11°
MEDIUM	21°
WIDE	42°
EXTRA WIDE	71°
ELLIPTICAL	10°x41°
ELLIPTICAL WIDE	21°x38°

PHOTOMETRIC DETAILS
 AVAILABLE ON OUR WEBSITE
 DATI FOTOMETRICI DISPONIBILI
 SUL NOSTRO SITO





TECHNICAL SPECIFICATIONS

18 or 36 high brightness cold or warm white (monochrome on request) power LEDs unit
 Power supply: standard 100÷240V / 50-60Hz
 Power consumption:
 X-18 0.2A @ 230V / 42W max
 X-36 0.4A @ 230V / 84W max
 Electrical class: I
 Self-resetting fuse protection
 Integrated electronic thermal protection management
 Meets CE safety standards
 Extruded aluminium body
 IP67
 Operating temperature: -30°C to 50°C (-22°F to 122°F)
 X-18: 2.8 Kg X-36: 4.5 Kg

SPECIFICHE TECNICHE

Barra modulare con 18 o 36 LED di potenza bianchi (monocromatici su richiesta)
 Alimentazione: standard 100÷240V / 50-60Hz
 Consumo:
 X-18 0,2A @ 230V / 42W max
 X-36 0,4A @ 230V / 84W max
 Classe elettrica: I
 Fusibile di protezione auto-ripristinante
 Protezione termica con controllo elettronico integrato
 Rispetta le norme CE
 Corpo proiettore in alluminio estruso
 IP67
 Temperatura di utilizzo: da -30°C a 50°C
 X-18: 2,8 Kg X-36: 4,5 Kg



EASY EDITION

Featuring 18 or 36 cold or warm colour temperature white LEDs, as well as a wide choice of monochromatic tones, PARADE X-18 and 36 EASY come with a light weight competitive price for budget restraint projects where DMX, colour changing and dimming options are not specified.

Disponibili con 18 o 36 LED bianchi a temperatura colore calda o fredda, oltre che in una vasta gamma di tonalità monocromatiche a scelta, i PARADE X-18 e 36 EASY sono caratterizzati da un prezzo competitivo per progetti a budget contenuto che non richiedono opzioni DMX, dimmer e cambio colore.

CODES / CODICI

AL4058 PARADE X-18 EASY
 AL4056 PARADE X-36 EASY

IP67 / IK06 / CE

CODES EXTENSION / ESTENSIONE CODICI

AL4058	EL	CW
CODE +	OPTICS +	LED TYPE
CODICE	OTTICA	TIPO DI LED

OPTICS / OTTICA

- SP** Spot / Spot
- NA** Narrow / Stretta
- ME** Medium / Media
- WI** Wide / Larga
- EW** Extra wide / Extra larga
- EL** Elliptical / Ellittica
- WL** Elliptical Wide / Ellittica larga

LED TYPE / TIPO DI LED

- CW** Cold white / Bianco freddo
- WW** Warm white / Bianco caldo

BEAM ANGLE REFERENCE	
SPOT	8°
NARROW	11°
MEDIUM	21°
WIDE	42°
EXTRA WIDE	71°
ELLIPTICAL	10°x41°
ELLIPTICAL WIDE	21°x38°

PHOTOMETRIC DETAILS
 AVAILABLE ON OUR WEBSITE
 DATI FOTOMETRICI DISPONIBILI
 SUL NOSTRO SITO

THE OUTDOOR LED DIMENSION

PARADE X-18 36 | outdoor use

A NEWLY DESIGNED STYLISH PROFILE

