

PARADE X-18 36



PARADE X-18 and 36 RGB feature unquestionably powerful luminous flux with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements. Available also in white LED configurations, these modular bars provide for truly powerful wall grazing enhancement. The combination of the 18 or 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. The stylish profile is complemented by the on board control panel offering instant and complete access over all digital functions.



TECHNICAL SPECIFICATIONS

18 or 36 high brightness RGB or white power LEDs unit
Continuously variable light intensity
DMX , automatic and Master-Slave mode
Remote firmware update (RFU)
RDM function
Power supply:
standard 100÷240V / 50-60Hz
Power consumption:
X-18 0.2A @ 230V / 42W max
X-36 0.4A @ 230V / 84W max
Electrical class: I
Self-resetting fuse protection
Meets CE safety standards
Extruded aluminium body

IP67
Operating temperature:
-30°C to 50°C (-22°F to 122°F)
Integrated electronic thermal protection management
Easy Edition, for budget restraint projects where DMX, colour changing, and dimming options are not specified, available on request.
X-18: 2.8 Kg
X-36: 4.5 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



PARADE X-18 36

LINEAR WALL GRAZING

CODES

AL3230/AL3930/AL3940 PARADE X-RGB/CW/WW-36 SPOT
 AL3232/AL3931/AL3941 PARADE X-RGB/CW/WW-36 NARROW
 AL3234/AL3932/AL3942 PARADE X-RGB/CW/WW-36 MEDIUM
 AL3236/AL3933/AL3943 PARADE X-RGB/CW/WW-36 WIDE
 AL3242/AL3934/AL3944 PARADE X-RGB/CW/WW-36 EXTRA WIDE
 AL3238/AL3935/AL3945 PARADE X-RGB/CW/WW-36 ELLIPTICAL
 AL3240/AL3936/AL3946 PARADE X-RGB/CW/WW-36 ELLIPTICAL WIDE


AL4056 PARADE-X 36 EASY
 AL4058 PARADE X-18 EASY

AL3950/60/70 PARADE X-RGB/CW/WW-18 SPOT
 AL3951/61/71 PARADE X-RGB/CW/WW-18 NARROW
 AL3952/62/72 PARADE X-RGB/CW/WW-18 MEDIUM
 AL3953/63/73 PARADE X-RGB/CW/WW-18 WIDE
 AL3954/64/74 PARADE X-RGB/CW/WW-18 EXTRA WIDE
 AL3955/65/75 PARADE X-RGB/CW/WW-18 ELLIPTICAL
 AL3956/66/76 PARADE X-RGB/CW/WW-18 ELLIPTICAL WIDE

NOTES


All code extensions of the EASY EDITION can be found on our website.

FEATURES AND OPTIONS

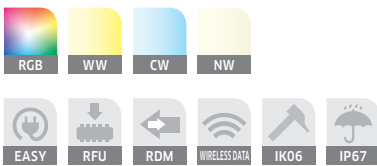

BEAM ANGLE REFERENCE

SPOT	8°
NARROW	11°
MEDIUM	21°
WIDE	42°
EXTRA WIDE	71°
ELLIPTICAL	10°X41°
ELLIPTICAL WIDE	21°X38°

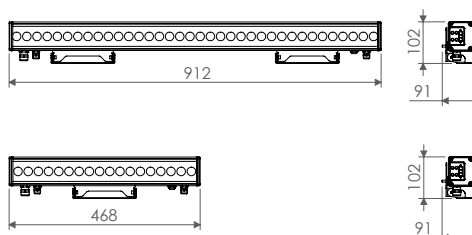

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE







LINEAR WALL GRAZING

