



PARADE S is a modular and adjustable high luminance linear module featuring 20, 40 or 60 RGBW LEDs grouped in clusters of 4 LEDs each, whereas white LED configurations are also available. Superb output with real uniform coverage even on close-up installations is provided by the specifically conceived elliptical and elliptical wide optics purposely designed for true wall washing effects. The outstandingly powerful luminous flux tops the standard range of similar products available on the market and a truly comfortable set up is guaranteed by the total absence of external power supply box requirement.



TECHNICAL SPECIFICATIONS

20, 40 or 60 high brightness RGBW or white power LEDs units
 Continuously variable light intensity
 DMX remote control
 Remote firmware update (RFU)
 RDM function
 Infrared remote control
 Power supply:
 standard 100÷240V / 50-60Hz
 Power Consumption:
 S-RGBW-20 0.17A @ 230V / 28W max
 S-RGBW-40 0.35A @ 230V / 49W max
 S-RGBW-60 0.45A @ 230V / 72W max
 Electrical class: I
 Self-resetting fuse protection

Meets CE and CSA safety standards
 Extruded aluminium body
 IP67
 Operating temperature:
 -40°C to 50°C (-40°F to 122°F)
 Integrated electronic thermal protection management
Polar Edition, featuring an integrated de-icing system with electrically heated glass, available on request.
 S-20: 2.7 Kg
 S-40: 4.5 Kg
 S-60: 6 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



PARADE S-20 40 60

LINEAR WALL GRAZING

CODES

AL2585/87/90 PARADE S-RGBW-20/40/60 MEDIUM
 AL2554/64/74 PARADE S-RGBW-20/40/60 WIDE
 AL2558/68/78 PARADE S-RGBW-20/40/60 ELLIPTICAL
 AL2580/84/88 PARADE S-RGBW-20/40/60 ELLIPTICAL WIDE
 AL2582/86/89 PARADE S-RGBW-20/40/60 WALL WASH

AL3114/24/34 PARADE S-CW-20/40/60 MEDIUM
 AL3110/20/30 PARADE S-CW-20/40/60 WIDE
 AL3111/21/31 PARADE S-CW-20/40/60 ELLIPTICAL
 AL3112/22/32 PARADE S-CW-20/40/60 ELLIPTICAL WIDE
 AL3113/23/33 PARADE S-CW-20/40/60 WALL WASH

AL3119/29/39 PARADE S-WW-20/40/60 MEDIUM
 AL3115/25/35 PARADE S-WW-20/40/60 WIDE
 AL3116/26/36 PARADE S-WW-20/40/60 ELLIPTICAL
 AL3117/27/37 PARADE S-WW-20/40/60 ELLIPTICAL WIDE
 AL3118/28/38 PARADE S-WW-20/40/60 WALL WASH


AL3160/65/70 PARADE S-DW-20/40/60 MEDIUM
 AL3161/66/71 PARADE S-DW-20/40/60 WIDE
 AL3162/67/72 PARADE S-DW-20/40/60 ELLIPTICAL
 AL3163/68/73 PARADE S-DW-20/40/60 ELLIPTICAL WIDE
 AL3164/69/74 PARADE S-DW-20/40/60 WALL WASH

NOTES


On request, Parade S is available also in the CSA certified version.
 The Polar Edition can be ordered by adding PE to the code.

Parade S must always be purchased with AL1321 Infrared Remote Control. More units of Parade S can be controlled with one AL1321.

ACCESSORIES



AL4333 BARNDOOR FOR PARADE S-20
 AL4337 BARNDOOR FOR PARADE S-40
 AL4341 BARNDOOR FOR PARADE S-60



AL4330 SNOOT FOR PARADE S-20
 AL4334 SNOOT FOR PARADE S-40
 AL4338 SNOOT FOR PARADE S-60



AL4331 VISOR FOR PARADE S-20
 AL4335 VISOR FOR PARADE S-40
 AL4339 VISOR FOR PARADE S-60



AL1321 INFRARED REMOTE CONTROL

FEATURES AND OPTIONS




*PARADE S-RGBW-20
 ** PARADE S-RGBW-40/60



BEAM ANGLE REFERENCE

MEDIUM	27°x39°
WIDE	45°
ELLIPTICAL	14°x55°
ELLIPTICAL WIDE	37°x109°
WALL WASH	18° (6° incline) x 47°

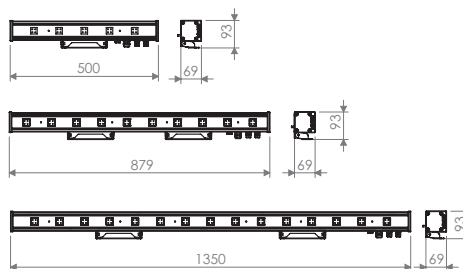

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE







LINEAR WALL GRAZING