



RUBY XP is capable of delivering a highly efficient luminous flux taking advantage of the twenty high power LEDs it is fitted with. This stylish and versatile fixture easily conveys spot lighting and wall grazing effects at medium to long distances owing to the wide selection of optics groups available.



## TECHNICAL SPECIFICATIONS

20 high brightness RGBW or white power LEDs unit  
Continuously variable light intensity  
DMX, automatic and Master-Slave mode  
Remote firmware update (RFU)  
RDM function  
Infrared remote control  
Power supply:  
standard 100÷240V / 50-60Hz  
Power consumption:  
0.18A @ 230V / 37W max  
Electrical class: I  
Self-resetting fuse protection  
Meets CE safety standards  
Aluminium body

IP66  
Operating temperature:  
-30°C to 50°C (-22°F to 122°F)  
Integrated electronic thermal  
protection management  
4.9 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



# RUBY XP

FAÇADE LIGHTING

## CODES

AL4422 RUBY XP

AL4422 SP RW

CODE + OPTICS + LED TYPE

## OPTICS

**SP** Spot  
**NA** Narrow  
**ME** Medium  
**WI** Wide  
**EW** Extra wide  
**EL** Elliptical  
**WL** Elliptical wide  
**WW** Wall wash

## LED TYPE

**RW** RGBW  
**CW** Cold white  
**WW** Warm white  
**DW** Dynamic white

## NOTES

Ruby XP must always be purchased with AL1321 Infrared Remote Control. More Ruby XP units can be controlled with one AL1321.

## ACCESSORIES



AL4366 BARNDOOR



AL1321 INFRARED REMOTE CONTROL



AL4985 SNOOT



AL4984 VISOR


## FEATURES AND OPTIONS





## BEAM ANGLE REFERENCE

SPOT	7°
NARROW	11°
MEDIUM	20°
WIDE	43°
EXTRA WIDE	68°
ELLIPTICAL	9°x41°
WALL WASH	14° (16° incline) x37°

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

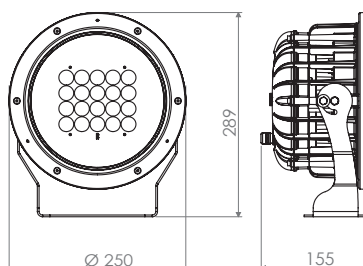



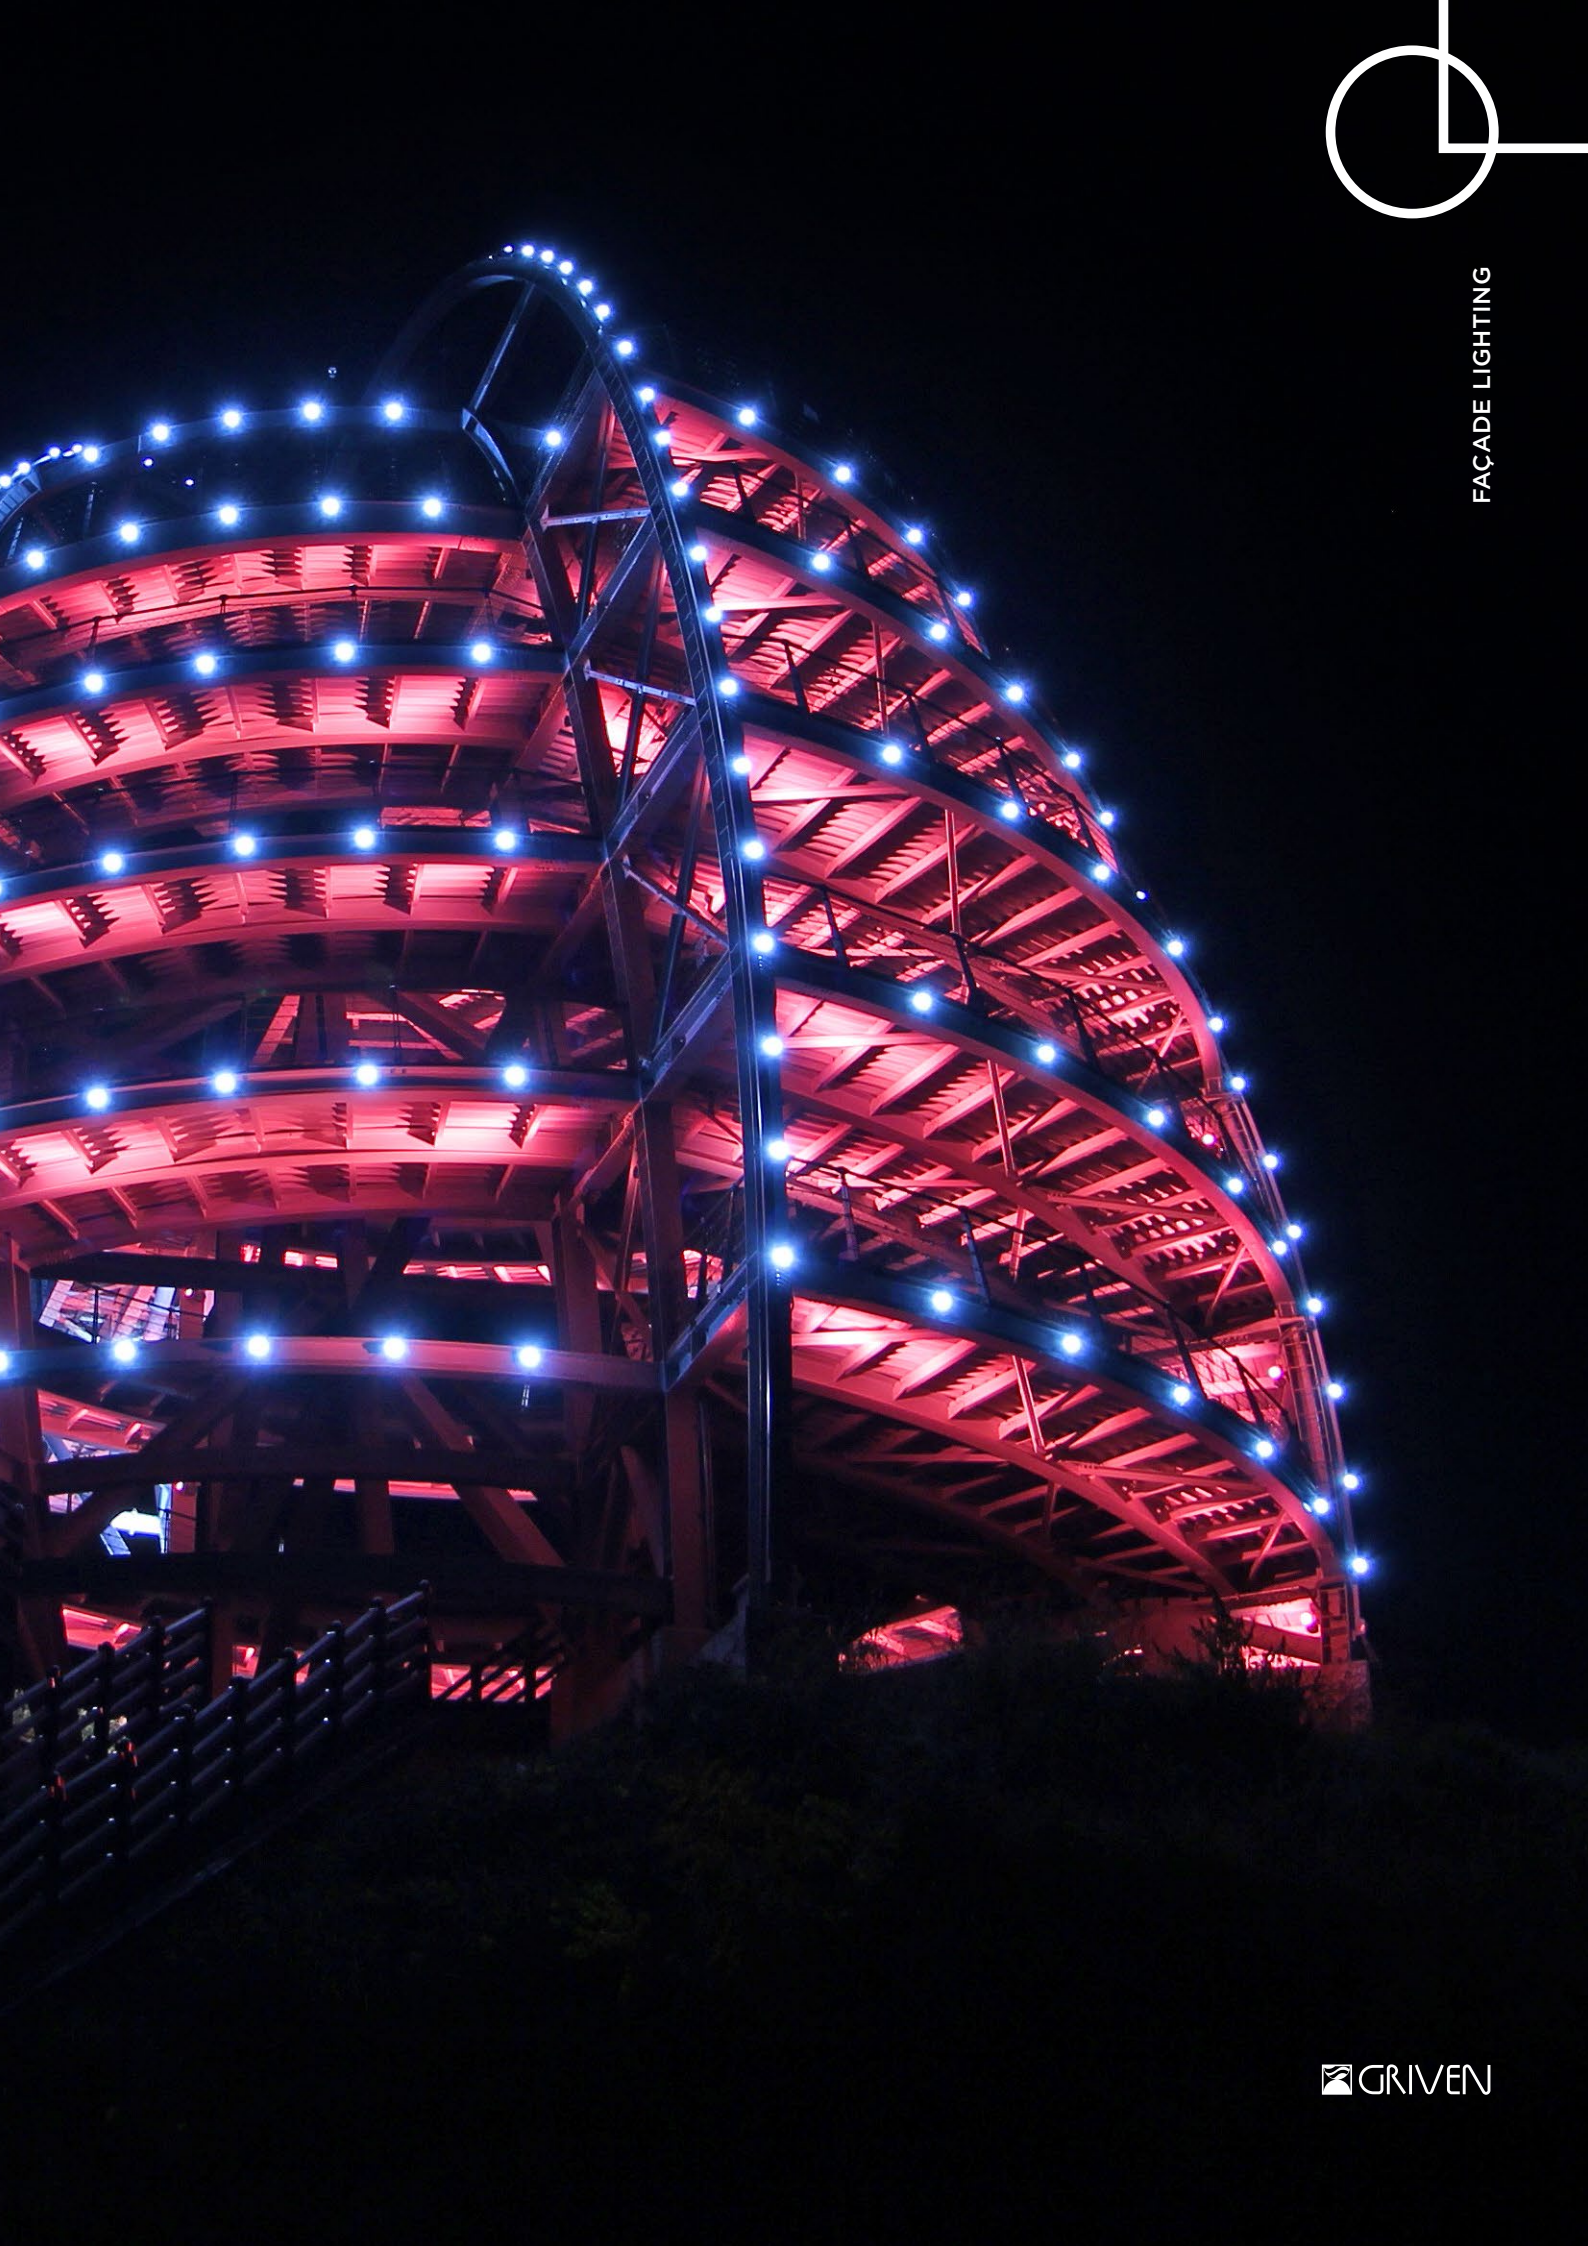

FAÇADE LIGHTING