



# PARADE S-20 40 R



Delivering superb output and real uniform colour coverage purposely on close-up installations, PARADE S-20 and 40 RECESSED are modular, super flux, high luminance recessed linear LED modules that, featuring an IP67 weather protection along with a compact size and a light weight manageability, are suitable for in-ground use in pedestrian areas. A truly comfortable set up is guaranteed by the total absence of external power supply box requirement.



## TECHNICAL SPECIFICATIONS

20 or 40 high brightness RGBW or white power LEDs units  
Continuously variable light intensity  
DMX, automatic and Master-Slave mode  
Remote firmware update (RFU)  
Power supply:  
standard 100÷240V / 50-60Hz  
Power consumption:  
S-20 R 0.17A @ 230V / 28W max  
S-40 R 0.35A @ 230V / 49W max  
Electrical class: I  
Self-resetting fuse protection  
Integrated electronic thermal protection management  
Meets CE and CSA safety standards

Extruded aluminium body and stainless steel flange and formwork  
Anti-slip treatment available on request  
IP67  
Operating temperature:  
-40°C to 50°C (-40°F to 122°F)  
S-20 R: 5.1 Kg  
S-40 R: 8.7 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



# PARADE S-20 40 R

RECESSED APPLICATIONS

## CODES

AL3555/50 PARADE S-RGBW-20/40 R MEDIUM  
 AL3556/51 PARADE S-RGBW-20/40 R WIDE  
 AL3557/52 PARADE S-RGBW-20/40 R ELLIPTICAL  
 AL3558/53 PARADE S-RGBW-20/40 R ELL. WIDE  
 AL3559/54 PARADE S-RGBW-20/40 R WALL WASH

AL3545/35 PARADE S-WW-20/40 R MEDIUM  
 AL3546/36 PARADE S-WW-20/40 R WIDE  
 AL3547/37 PARADE S-WW-20/40 R ELLIPTICAL  
 AL3548/38 PARADE S-WW-20/40 R ELL. WIDE  
 AL3549/39 PARADE S-WW-20/40 R WALL WASH

AL3540/30 PARADE S-CW-20/40 R MEDIUM  
 AL3541/31 PARADE S-CW-20/40 R WIDE  
 AL3542/32 PARADE S-CW-20/40 R ELLIPTICAL  
 AL3543/33 PARADE S-CW-20/40 R ELLIPTICAL WIDE  
 AL3544/34 PARADE S-CW-20/40 R WALL WASH

AL3565/60 PARADE S-DW-20/40 R MEDIUM  
 AL3566/61 PARADE S-DW-20/40 R WIDE  
 AL3567/62 PARADE S-DW-20/40 R ELLIPTICAL  
 AL3568/63 PARADE S-DW-20/40 R ELL. WIDE  
 AL3569/64 PARADE S-DW-20/40 R WALL WASH

## NOTES

Parade S units must always be purchased with one AL1321 Infrared Remote Control to set their DMX address.  
 On request, Parade S-20 40 R are available also in the CSA certified version.

## ACCESSORIES




AL1321 INFRARED REMOTE CONTROL

## FEATURES AND OPTIONS



## BEAM ANGLE REFERENCE

MEDIUM	27x39°
WIDE	45°
ELLIPTICAL	14°x55°
ELLIPTICAL WIDE	38°x109°
WALL WASH	18° (6° incline) x 48°

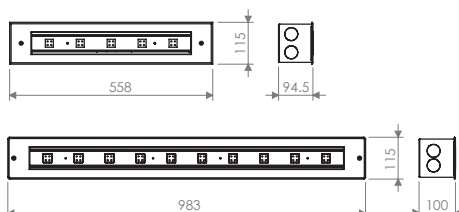

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE







RECESSED APPLICATIONS