

Parade X-48 RGBW




Date: 11.06.2018
Operator: PR

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3250 Parade X-RGBW-48 Medium sym / Luminaire Data Sheet

Luminous emittance 1:

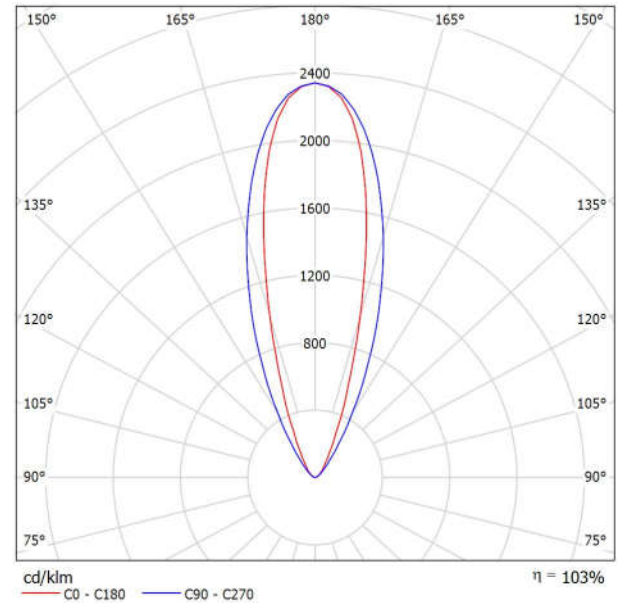

Luminaire classification according to CIE: 0
CIE flux code: 00 00 03 00 104

Griven Srl AL3250 Parade X-RGBW-48 Medium sym

Article No.: AL3250

Luminous flux (Luminaire): 3400 lm

Luminous flux (Lamps): 3291 lm

Luminaire Wattage: 117.0 W

Luminaire classification according to CIE: 0

CIE flux code: 00 00 03 00 104

Fitting: 48 x Led Cree XP-E (Correction Factor 1.000).


PARADE X-RGBW-48 is the leading edge high luminance flagship of the linear LED modules by GRIVEN. Superb output with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 48 RGBW LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing white light output quality, as well as a wider variety of intermediate colour hues for an even broader range of application purposes. PARADE X-RGBW-48 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3250 Parade X-RGBW-48 Medium sym / Cone Diagram

Luminaire: Griven Srl AL3250 Parade X-RGBW-48 Medium sym
Lamps: 48 x Led Cree XP-E

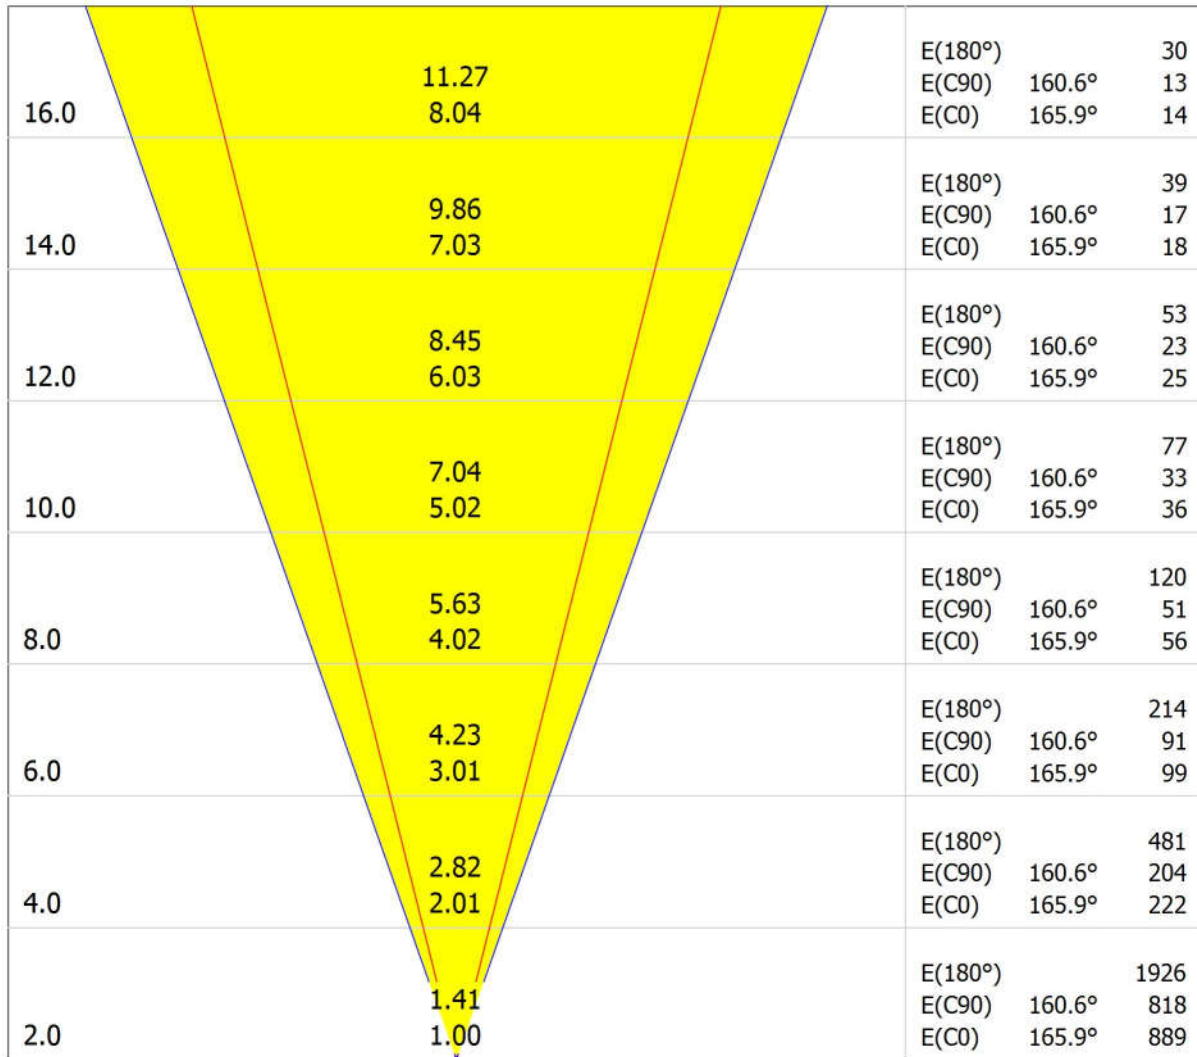

Distance [m] Cone Diameter [m] Illuminance [lx]


— C0 - C180 (Half-value Angle: 28.2°)
— C90 - C270 (Half-value Angle: 38.8°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3252 Parade X-RGBW-48 Wide sym / Luminaire Data Sheet

Luminous emittance 1:

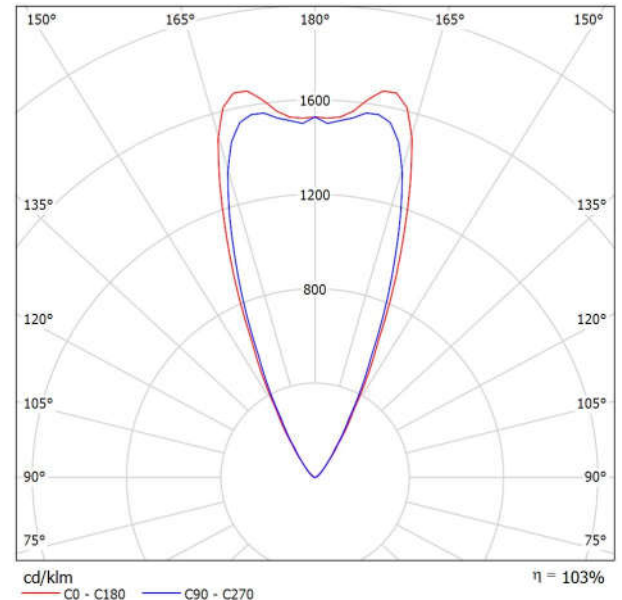

Luminaire classification according to CIE: 0
CIE flux code: 00 00 03 00 103

Griven Srl AL3252 Parade X RGBW 48 Wide sym
Article No.: AL3252
Luminous flux (Luminaire): 3236 lm
Luminous flux (Lamps): 3134 lm
Luminaire Wattage: 117.0 W
Luminaire classification according to CIE: 0
CIE flux code: 00 00 03 00 103
Fitting: 48 x Led CREE XP E (Correction Factor 1.000).


PARADE X-RGBW-48 is the leading edge high luminance flagship of the linear LED modules by GRIVEN. Superb output with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 48 RGBW LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing white light output quality, as well as a wider variety of intermediate colour hues for an even broader range of application purposes. PARADE X-RGBW-48 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3252 Parade X-RGBW-48 Wide sym / Cone Diagram

Luminaire: Griven Srl AL3252 Parade X-RGBW-48 Wide sym
Lamps: 48 x Led CREE XP-E

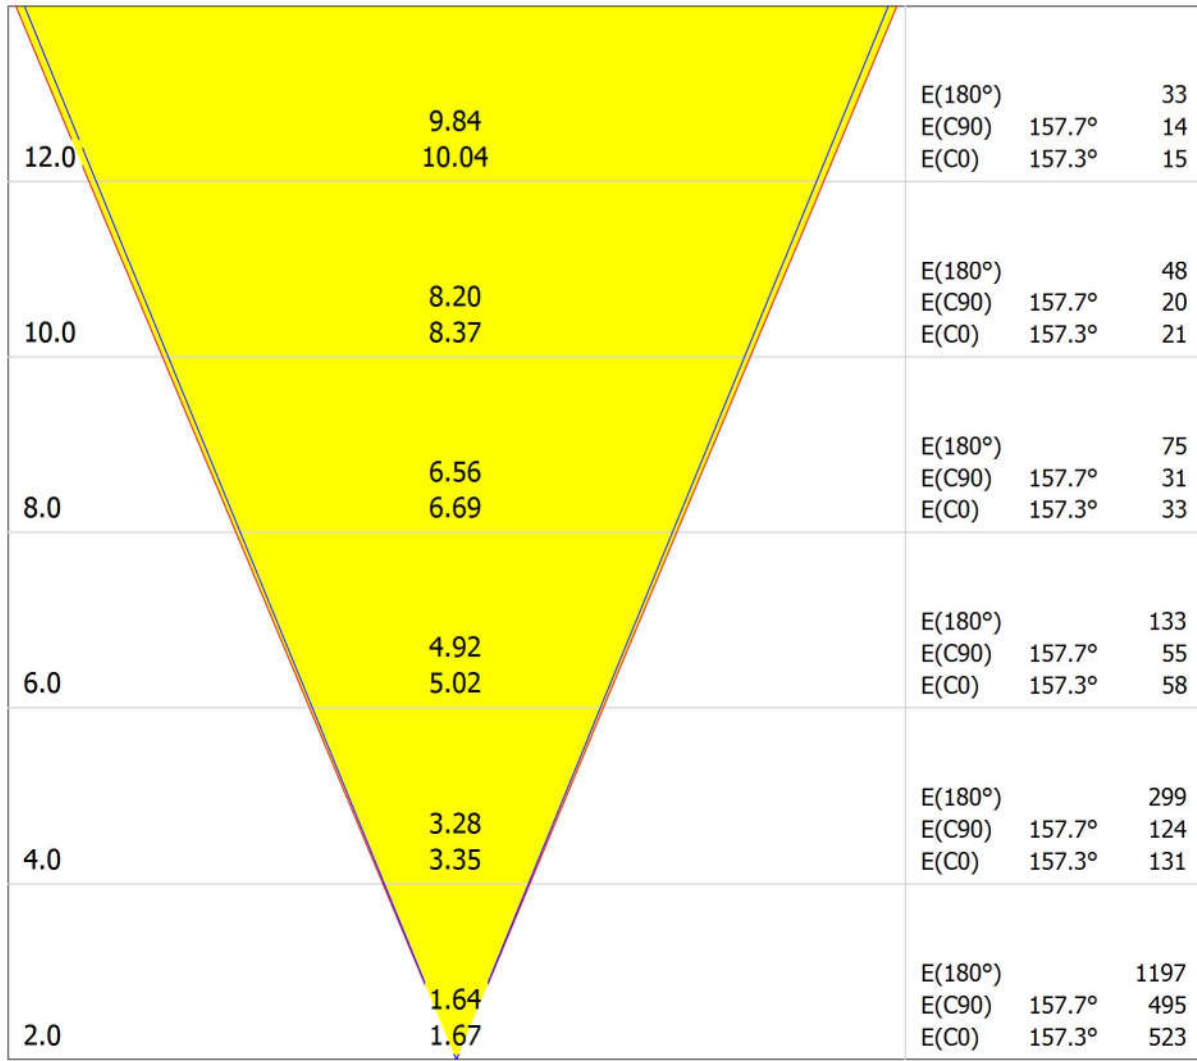

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 45.4°)
- C90 - C270 (Half-value Angle: 44.6°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3254 Parade X-RGBW-48 Elliptical sym / Luminaire Data Sheet

Luminous emittance 1:

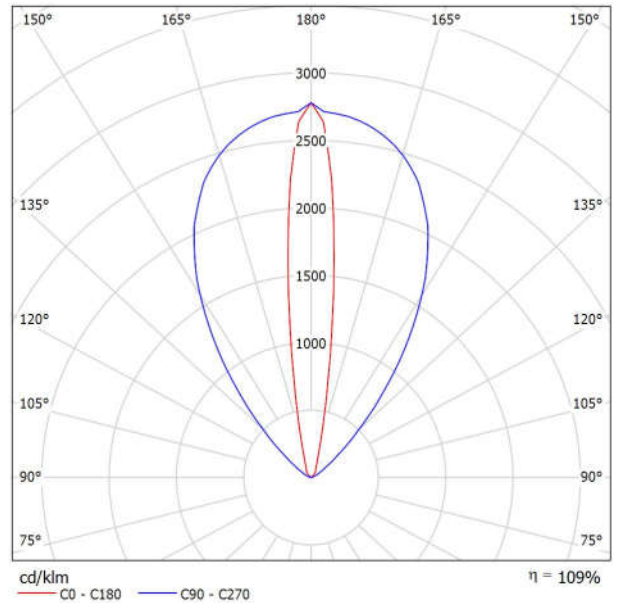

Luminaire classification according to CIE: 0
CIE flux code: 00 00 03 00 109

Griven Srl AL3254 Parade X RGBW 48 Elliptical sym

Article No.: AL3254

Luminous flux (Luminaire): 3461 lm

Luminous flux (Lamps): 3176 lm

Luminaire Wattage: 117.0 W

Luminaire classification according to CIE: 0

CIE flux code: 00 00 03 00 109

Fitting: 48 x Led CREE XP E (Correction Factor 1.000).


PARADE X-RGBW-48 is the leading edge high luminance flagship of the linear LED modules by GRIVEN. Superb output with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 48 RGBW LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing white light output quality, as well as a wider variety of intermediate colour hues for an even broader range of application purposes. PARADE X-RGBW-48 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3254 Parade X-RGBW-48 Elliptical sym / Cone Diagram

Luminaire: Griven Srl AL3254 Parade X-RGBW-48 Elliptical sym
Lamps: 48 x Led CREE XP-E

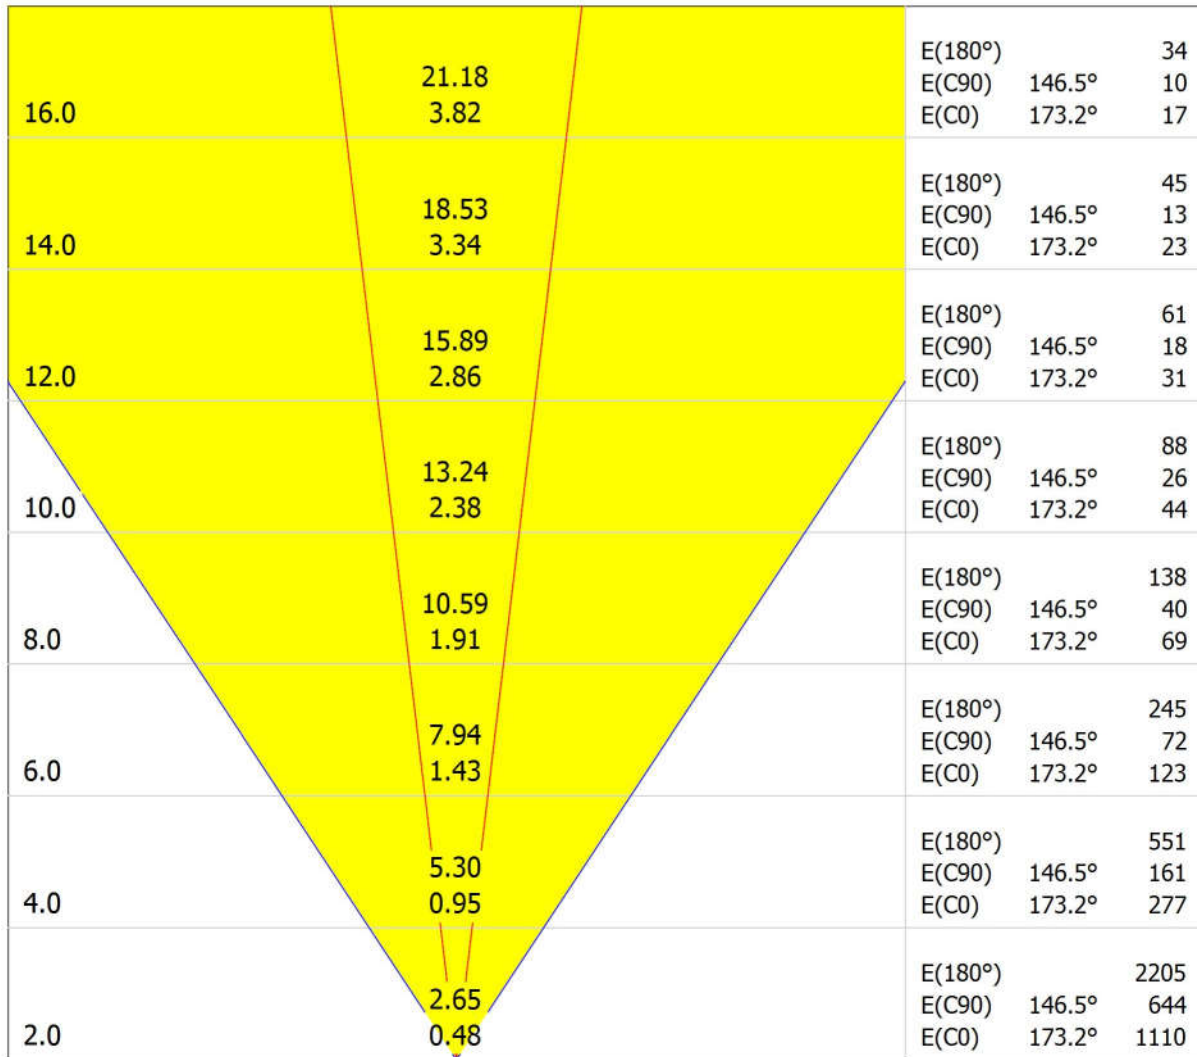

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 13.6°)
- C90 - C270 (Half-value Angle: 67.0°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3256 Parade X-RGBW-48 Elliptical wide sym / Luminaire Data Sheet

Luminous emittance 1:

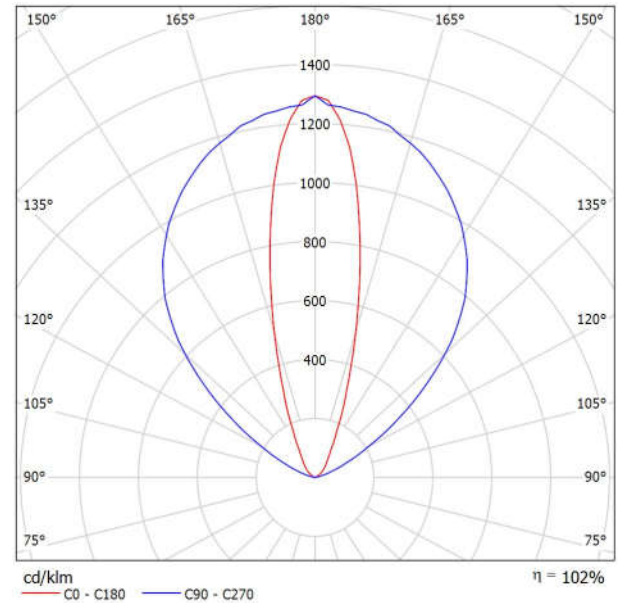

Luminaire classification according to CIE: 0
CIE flux code: 00 00 03 00 102

Griven Srl AL3256 Parade X-RGBW-48 Elliptical wide sym

Article No.: AL3256

Luminous flux (Luminaire): 3060 lm

Luminous flux (Lamps): 3003 lm

Luminaire Wattage: 117.0 W

Luminaire classification according to CIE: 0

CIE flux code: 00 00 03 00 102

Fitting: 48 x Led CREE XP-E (Correction Factor 1.000).


PARADE X-RGBW-48 is the leading edge high luminance flagship of the linear LED modules by GRIVEN. Superb output with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 48 RGBW LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing white light output quality, as well as a wider variety of intermediate colour hues for an even broader range of application purposes. PARADE X-RGBW-48 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3256 Parade X-**RGBW**-48 Elliptical wide sym / Cone Diagram

Luminaire: Griven Srl AL3256 Parade X-**RGBW**-48 Elliptical wide sym
Lamps: 48 x Led CREE XP-E

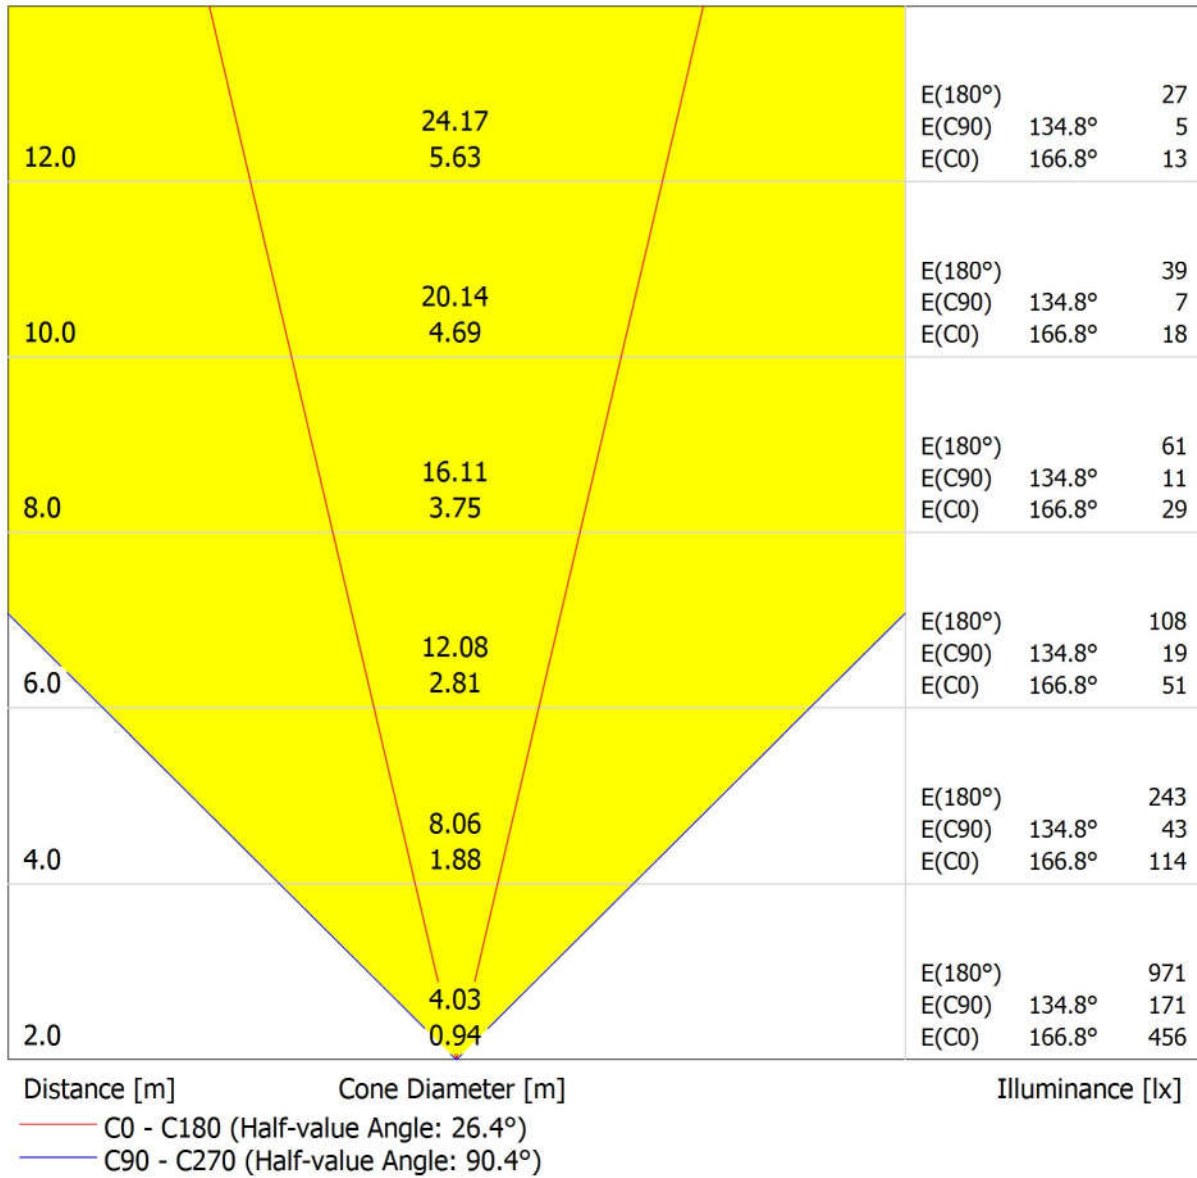


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL3258 Parade X-RGBW-48 Wall wash / Luminaire Data Sheet

Luminous emittance 1:

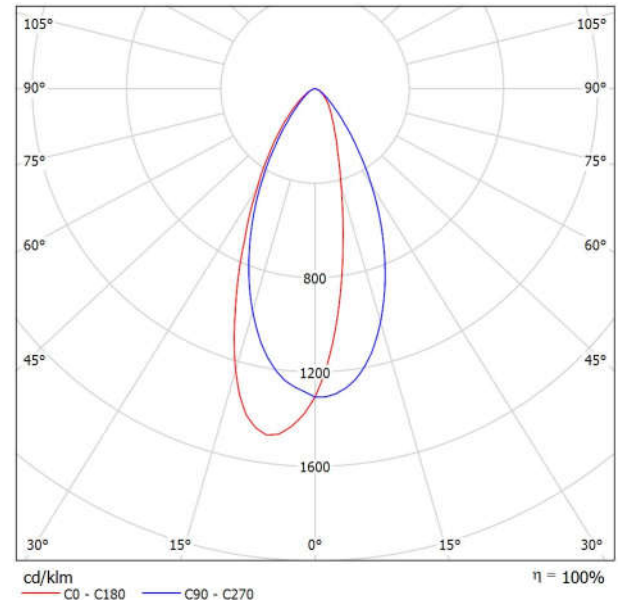

Luminaire classification according to CIE: 100
CIE flux code: 83 96 99 100 100

Griven Srl AL3258 Parade X RGBW 48 Wall wash
Article No.: AL3258
Luminous flux (Luminaire): 2951 lm
Luminous flux (Lamps): 2963 lm
Luminaire Wattage: 117.0 W
Luminaire classification according to CIE: 100
CIE flux code: 83 96 99 100 100
Fitting: 48 x Led CREE XP E (Correction Factor 1.000).

PARADE X-RGBW-48 is the leading edge high luminance flagship of the linear LED modules by GRIVEN. Superb output with real uniform colour coverage even on close-up installations, especially on formerly prohibitive large-scale architectural elements, and the newly conceived optics groups provide for truly powerful grazing lighting enhancement. The combination of the 48 RGBW LEDs featured and the photometric distribution efficiency offers an unprecedented astonishing white light output quality, as well as a wider variety of intermediate colour hues for an even broader range of application purposes. PARADE X-RGBW-48 newly designed stylish profile is complemented by the on board control panel that offers instant and complete access over all digital functions.