

Dune MC CW




Date: 22.06.2018
Operator: PR

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4018 Dune MC CW Spot sym / Luminaire Data Sheet

Luminous emittance 1:

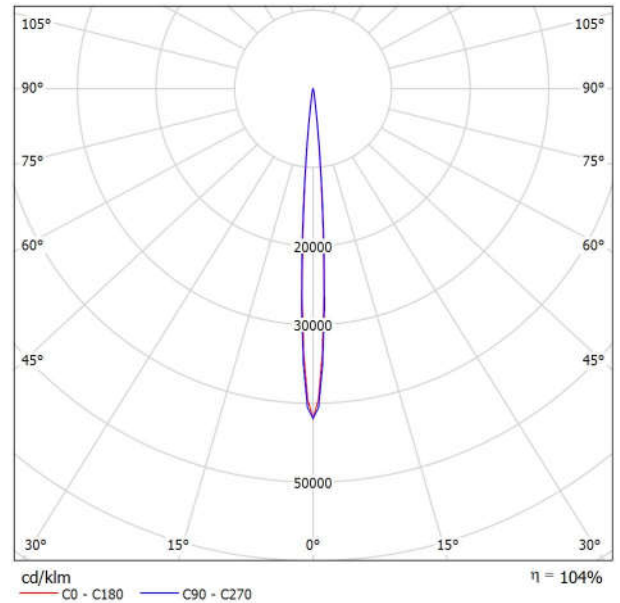

Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 105

Griven Srl AL4018 Dune MC CW Spot sym
Article No.: AL4018
Luminous flux (Luminaire): 1817 lm
Luminous flux (Lamps): 1746 lm
Luminaire Wattage: 45.0 W
Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 105
Fitting: 1 x XP-G3 (Correction Factor 1.000).


DUNE MC CW is a highly performing LED projector specifically designed for exterior recessed applications. This compact and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The cold white light configuration stands out for the unparalleled output from such a small wattage fixture and the stunning visual rendering of cool shades. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight load capacity makes this IP67 rated light projector suitable for ground mounting applications even in vehicular areas. This versatile fitting also allows beam positioning through 10° moving capability. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4018 Dune MC CW Spot sym / Cone Diagram

Luminaire: Griven Srl AL4018 Dune MC CW Spot sym
Lamps: 1 x XP-G3

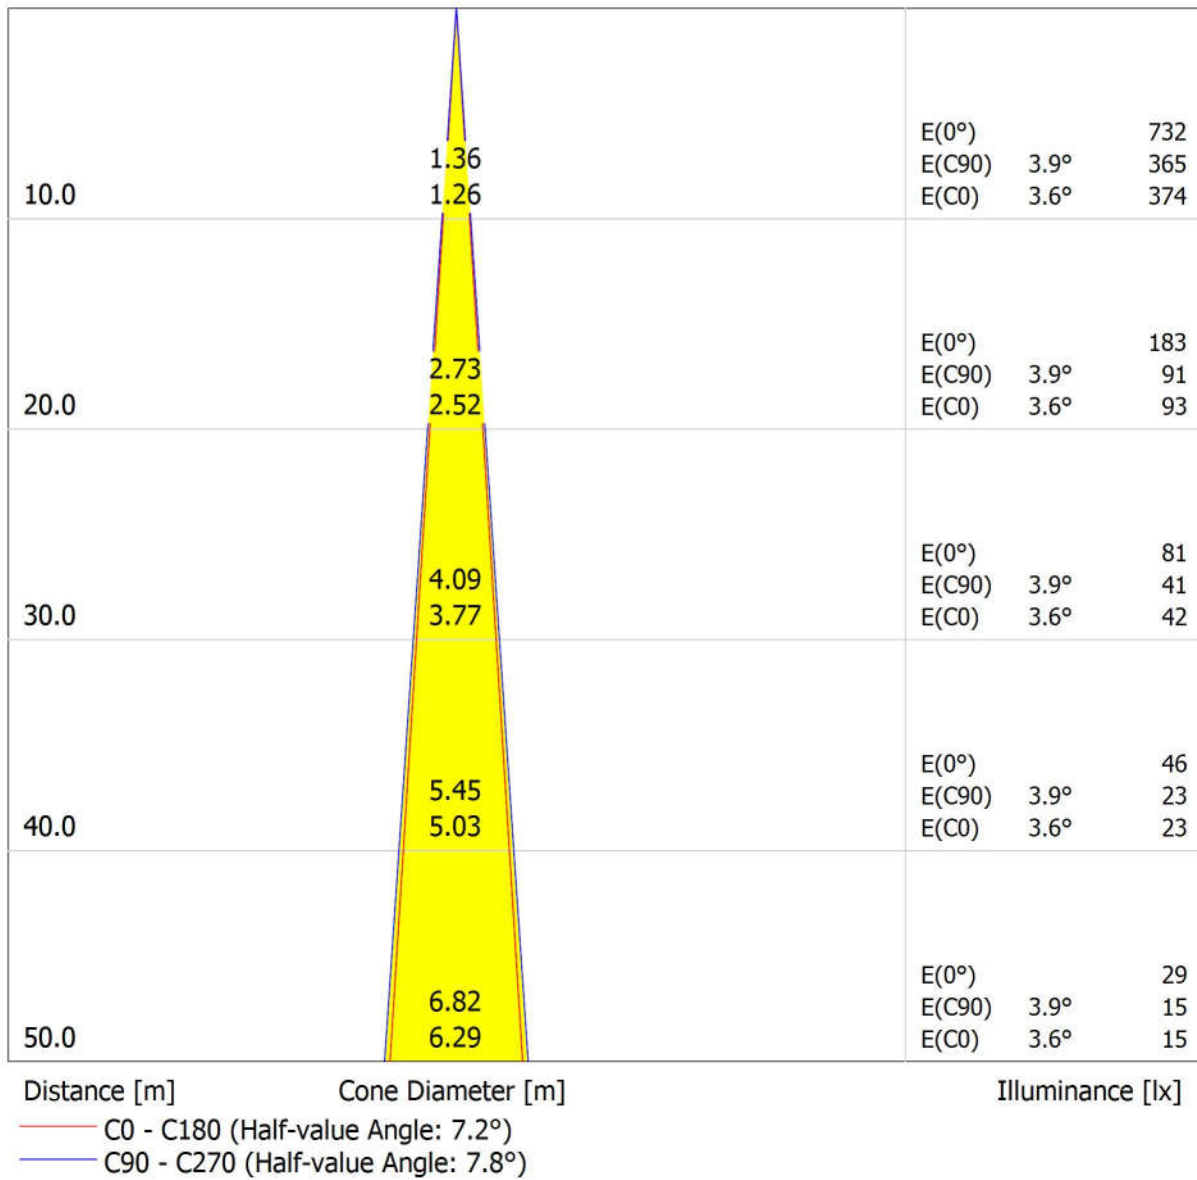


Griven S.r.l.
 Via Bulgaria, 16
 46042 Castel Goffredo, MN, Italy

Operator PR
 Telephone 0376779483
 Fax 0376779682
 e-Mail griven@griven.com

Griven Srl AL4020 Dune MC CW Narrow sym / Luminaire Data Sheet



Luminous emittance 1:

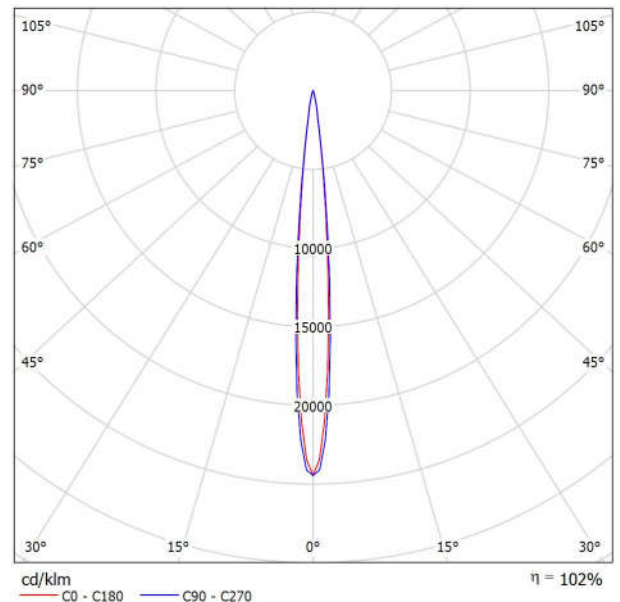

Luminaire classification according to CIE: 100
 CIE flux code: 97 99 100 100 103

Griven Srl AL4020 Dune MC CW Narrow sym
 Article No.: AL4020
 Luminous flux (Luminaire): 1721 lm
 Luminous flux (Lamps): 1688 lm
 Luminaire Wattage: 45.0 W
 Luminaire classification according to CIE: 100
 CIE flux code: 97 99 100 100 103
 Fitting: 1 x XP G3 (Correction Factor 1.000).


DUNE MC CW is a highly performing LED projector specifically designed for exterior recessed applications. This compact and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The cold white light configuration stands out for the unparalleled output from such a small wattage fixture and the stunning visual rendering of cool shades. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight load capacity makes this IP67 rated light projector suitable for ground mounting applications even in vehicular areas. This versatile fitting also allows beam positioning through 10° moving capability. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4020 Dune MC CW Narrow sym / Cone Diagram

Luminaire: Griven Srl AL4020 Dune MC CW Narrow sym
Lamps: 1 x XP-G3

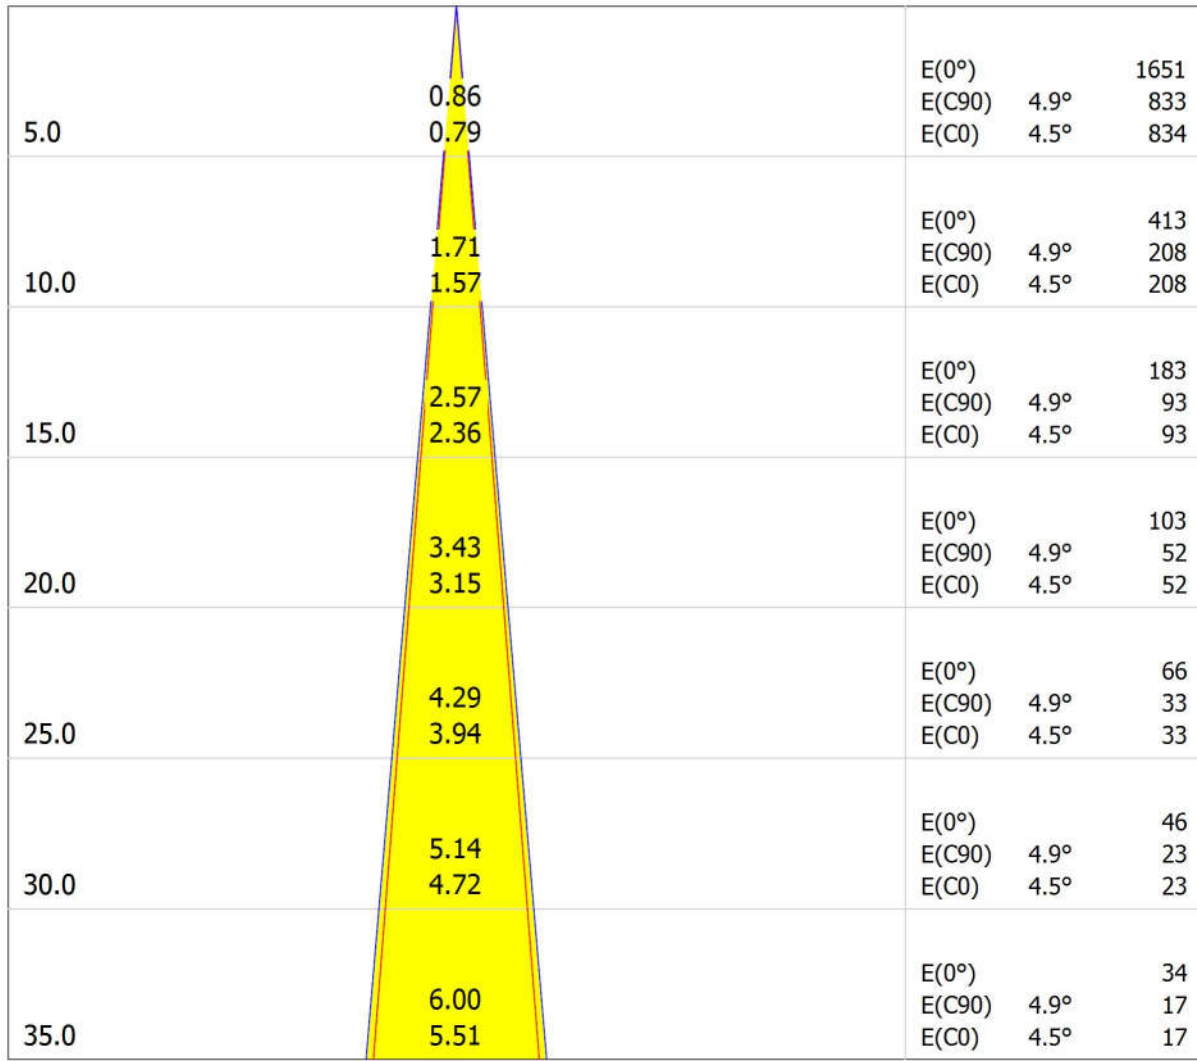

Distance [m] Cone Diameter [m] Illuminance [lx]


- C0 - C180 (Half-value Angle: 9.0°)
- C90 - C270 (Half-value Angle: 9.8°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4022 Dune MC CW Medium sym / Luminaire Data Sheet

Luminous emittance 1:

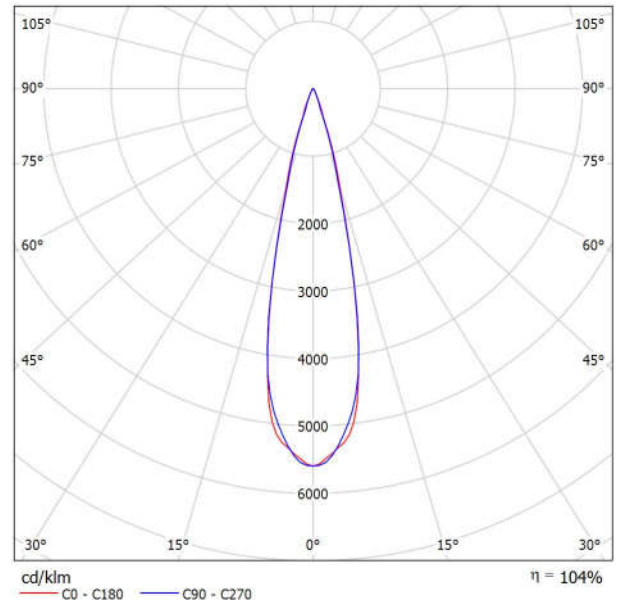

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 105

Griven Srl AL4022 Dune MC CW Medium sym
Article No.: AL4022
Luminous flux (Luminaire): 1727 lm
Luminous flux (Lamps): 1658 lm
Luminaire Wattage: 45.0 W
Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 105
Fitting: 1 x XP-G3 (Correction Factor 1.000).

DUNE MC CW is a highly performing LED projector specifically designed for exterior recessed applications. This compact and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The cold white light configuration stands out for the unparalleled output from such a small wattage fixture and the stunning visual rendering of cool shades. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight load capacity makes this IP67 rated light projector suitable for ground mounting applications even in vehicular areas. This versatile fitting also allows beam positioning through 10° moving capability. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4022 Dune MC CW Medium sym / Cone Diagram

Luminaire: Griven Srl AL4022 Dune MC CW Medium sym
Lamps: 1 x XP-G3



Distance [m] Cone Diameter [m] Illuminance [Ix]


— C0 - C180 (Half-value Angle: 24.4°)

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4024 Dune MC CW Wide sym / Luminaire Data Sheet

Luminous emittance 1:

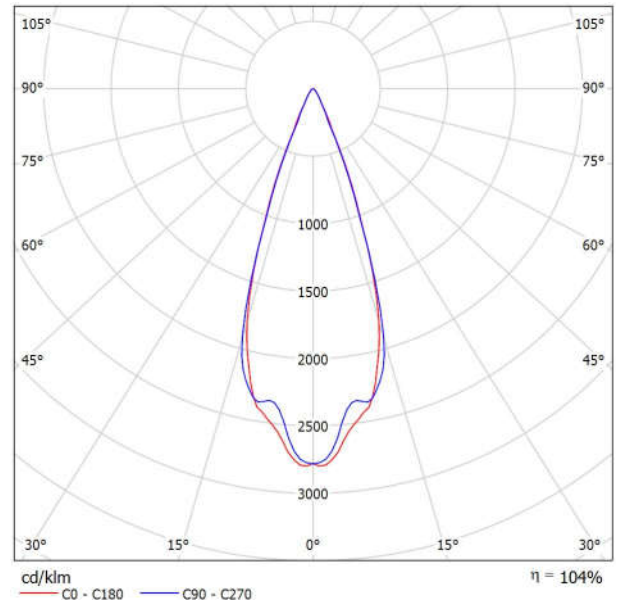

Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 104

Griven Srl AL4024 Dune MC CW Wide sym
Article No.: AL4024
Luminous flux (Luminaire): 1704 lm
Luminous flux (Lamps): 1642 lm
Luminaire Wattage: 45.0 W
Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 104
Fitting: 1 x XP G3 (Correction Factor 1.000).


DUNE MC CW is a highly performing LED projector specifically designed for exterior recessed applications. This compact and versatile fixture is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wide distribution. The cold white light configuration stands out for the unparalleled output from such a small wattage fixture and the stunning visual rendering of cool shades. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight load capacity makes this IP67 rated light projector suitable for ground mounting applications even in vehicular areas. This versatile fitting also allows beam positioning through 10° moving capability. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven Srl AL4024 Dune MC CW Wide sym / Cone Diagram

Luminaire: Griven Srl AL4024 Dune MC CW Wide sym
Lamps: 1 x XP-G3

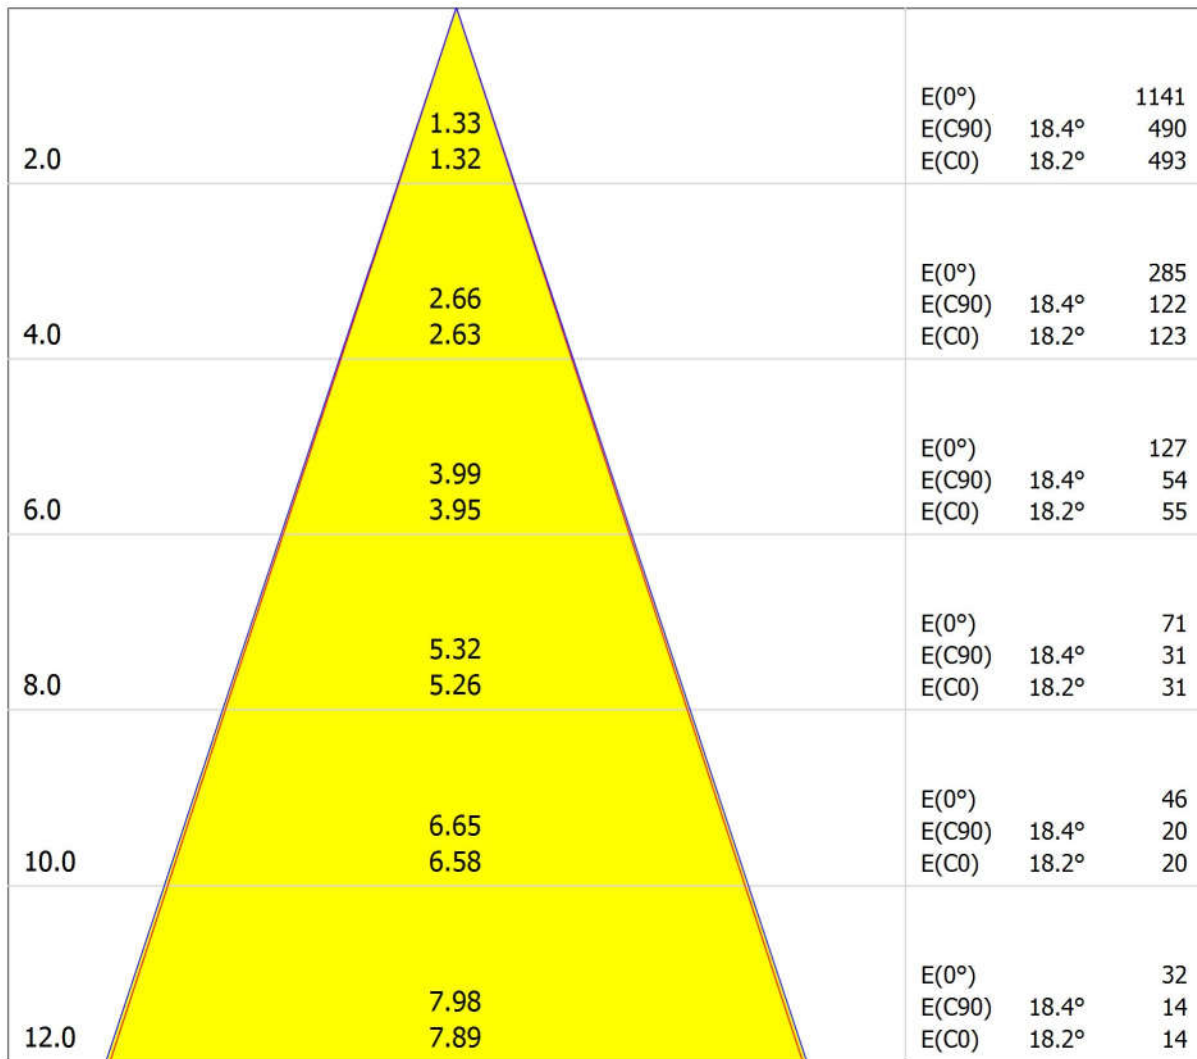

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 36.4°)
- C90 - C270 (Half-value Angle: 36.8°)