

## Ruby MC R CW




Date: 22.06.2018  
Operator: PR

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990SPCW RUBY MC R CW SPOT sym / Luminaire Data Sheet**

Luminous emittance 1:

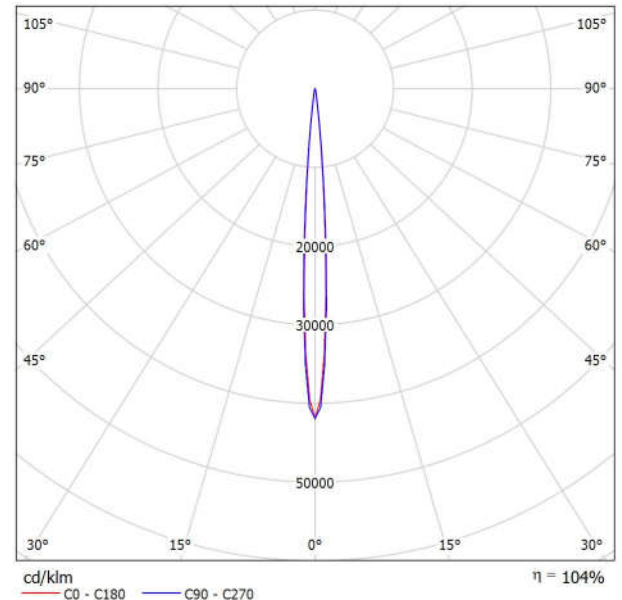

Luminaire classification according to CIE: 100  
CIE flux code: 98 100 100 100 105

Griven Srl AL4990SPCW RUBY MC R CW SPOT  
sym

Article No.: AL4990SPCW

Luminous flux (Luminaire): 2341 lm

Luminous flux (Lamps): 2250 lm

Luminaire Wattage: 58.0 W

Luminaire classification according to CIE: 100

CIE flux code: 98 100 100 100 105

Fitting: 1 x XP-G3 (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY MC R CW will unquestionably allow comfortable in-ground installation. This newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY MC R CW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The cold white light configuration features an unprecedented white light output for a refined range of application purposes. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight capacity makes this recessed fitting suitable for ground mounting applications even in vehicled areas. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990SPCW RUBY MC R CW SPOT sym / Cone Diagram**

Luminaire: Griven Srl AL4990SPCW RUBY MC R CW SPOT sym  
Lamps: 1 x XP-G3

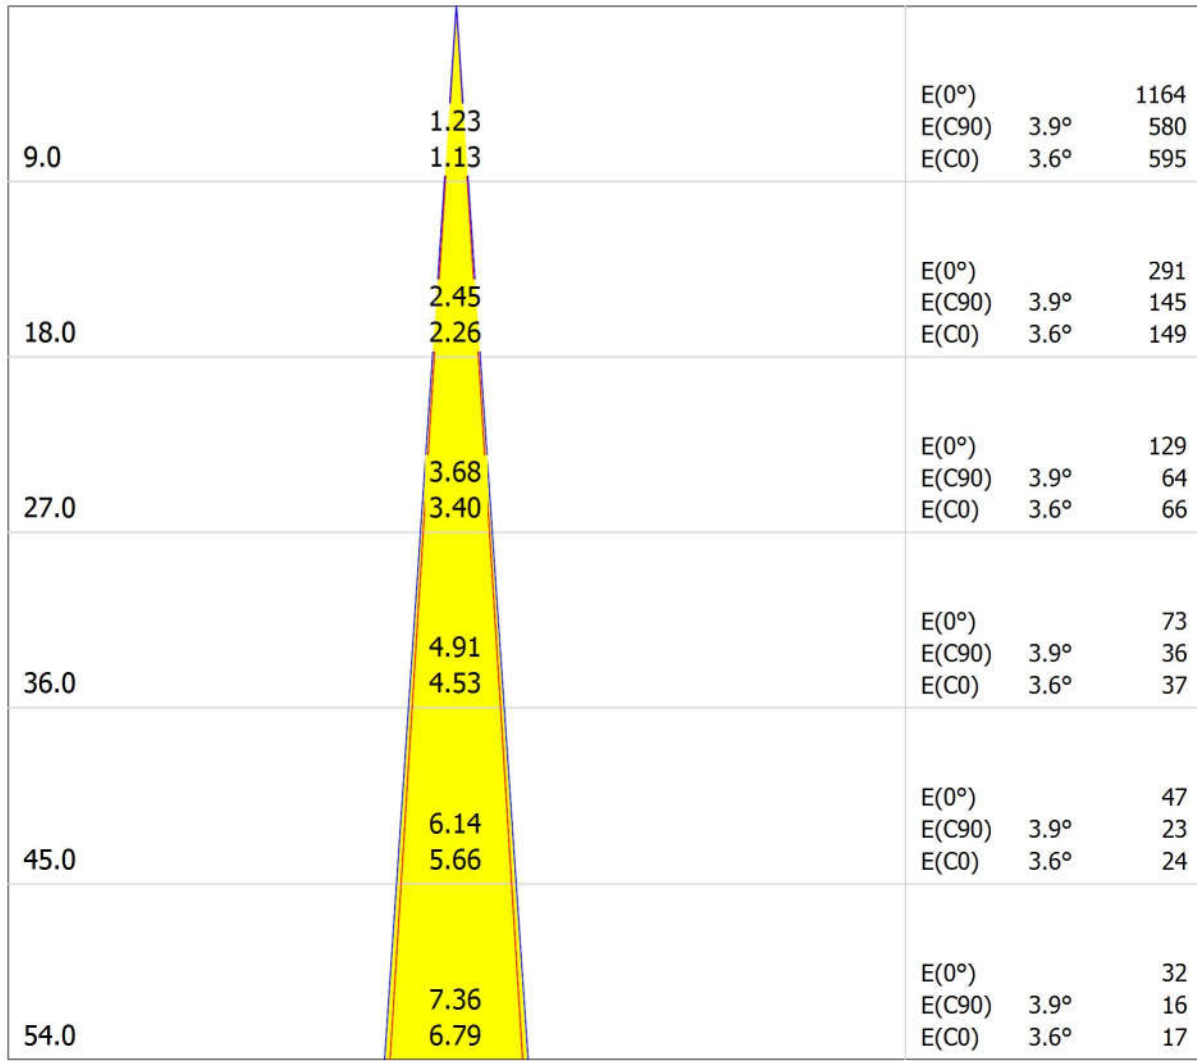

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 7.2°)
- C90 - C270 (Half-value Angle: 7.8°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990NACW RUBY MC R CW NARROW sym / Luminaire Data Sheet**

Luminous emittance 1:

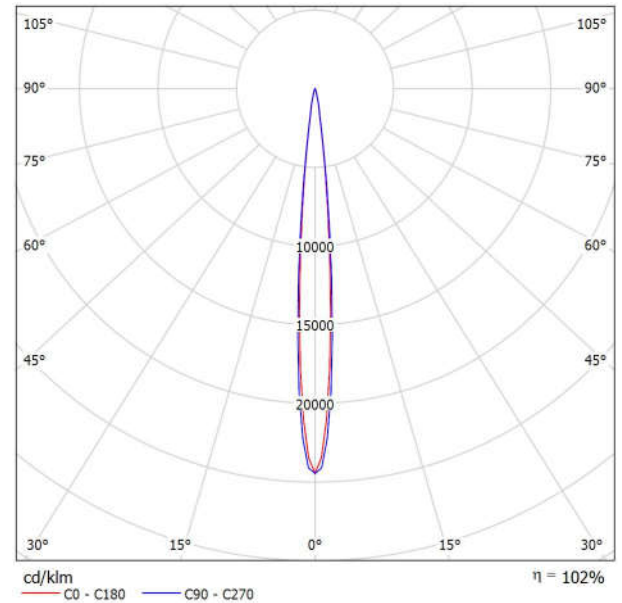

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 103

Griven Srl AL4990NACW RUBY MC R CW  
NARROW sym  
Article No.: AL4990NACW  
Luminous flux (Luminaire): 2217 lm  
Luminous flux (Lamps): 2175 lm  
Luminaire Wattage: 58.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 103  
Fitting: 1 x XP G3 (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY MC R CW will unquestionably allow comfortable in-ground installation. This newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY MC R CW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The cold white light configuration features an unprecedented white light output for a refined range of application purposes. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight capacity makes this recessed fitting suitable for ground mounting applications even in vehicled areas. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990NACW RUBY MC R CW NARROW sym / Cone Diagram**

Luminaire: Griven Srl AL4990NACW RUBY MC R CW NARROW sym  
Lamps: 1 x XP-G3

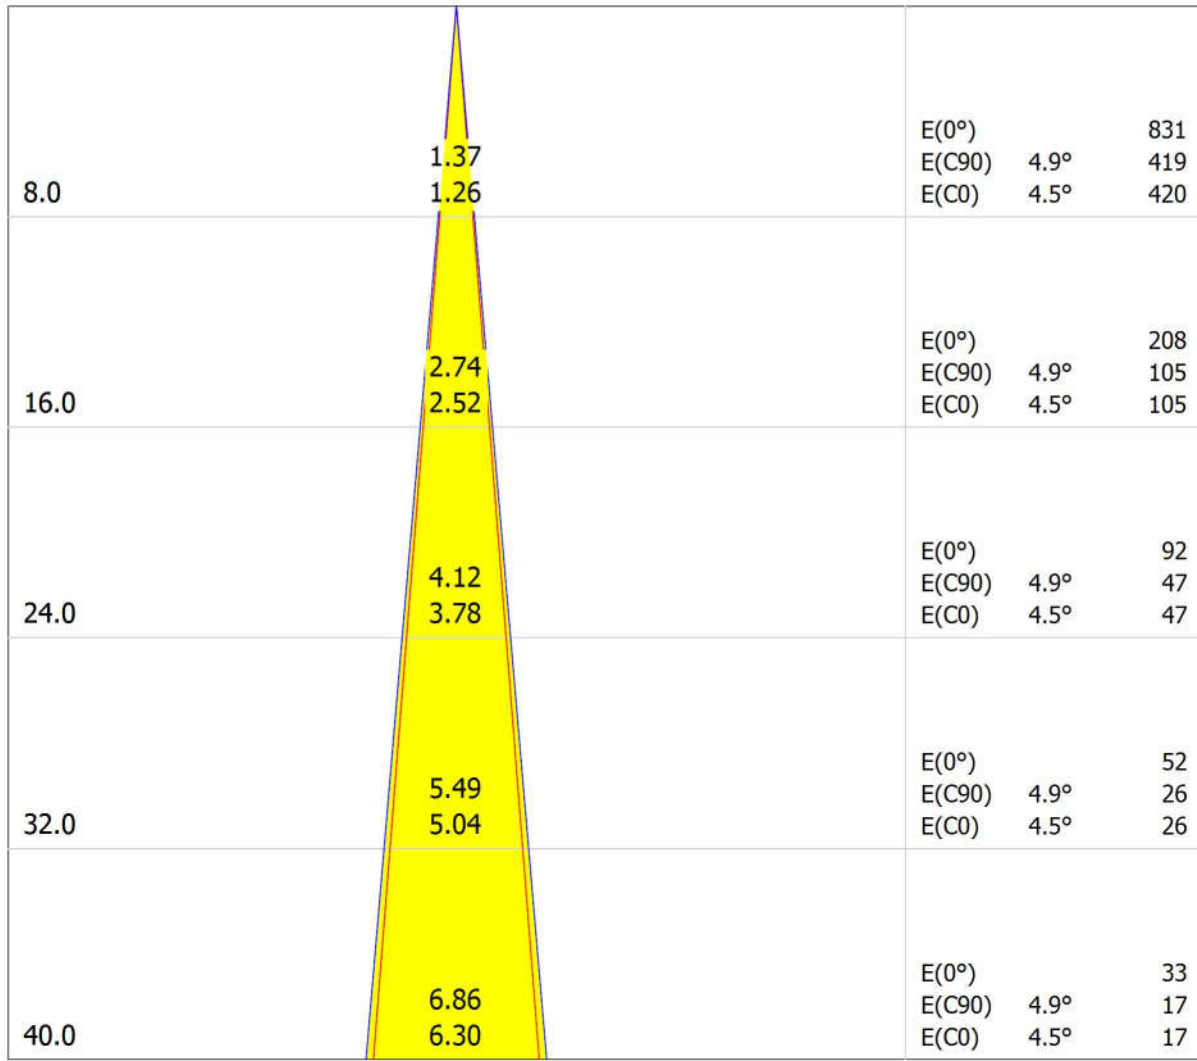

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 9.0°)
- C90 - C270 (Half-value Angle: 9.8°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990MECW RUBY MC R CW MEDIUM sym / Luminaire Data Sheet**

Luminous emittance 1:

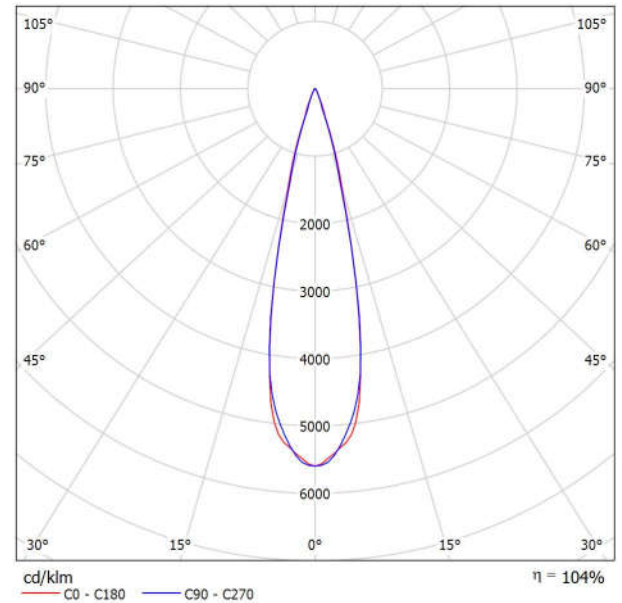

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 105

Griven Srl AL4990MECW RUBY MC R CW  
MEDIUM sym  
Article No.: AL4990MECW  
Luminous flux (Luminaire): 2225 lm  
Luminous flux (Lamps): 2136 lm  
Luminaire Wattage: 58.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 105  
Fitting: 1 x XP-G3 (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY MC R CW will unquestionably allow comfortable in-ground installation. This newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY MC R CW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The cold white light configuration features an unprecedented white light output for a refined range of application purposes. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight capacity makes this recessed fitting suitable for ground mounting applications even in vehicled areas. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990MECW RUBY MC R CW MEDIUM sym / Cone Diagram**

Luminaire: Griven Srl AL4990MECW RUBY MC R CW MEDIUM sym  
Lamps: 1 x XP-G3

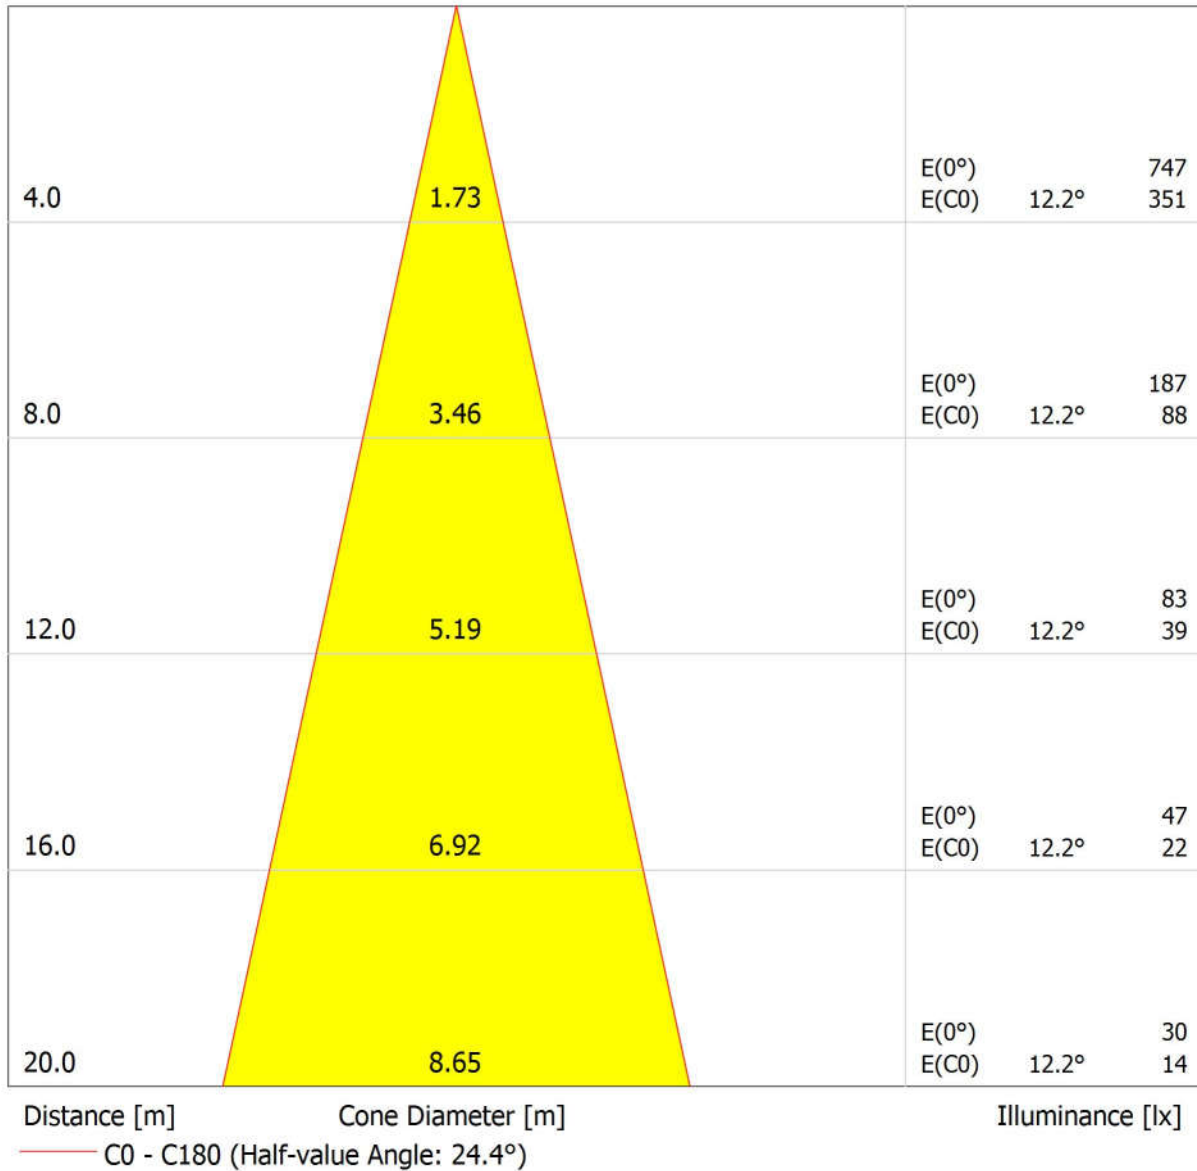


Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990WICW RUBY MC R CW WIDE sym / Luminaire Data Sheet**

Luminous emittance 1:

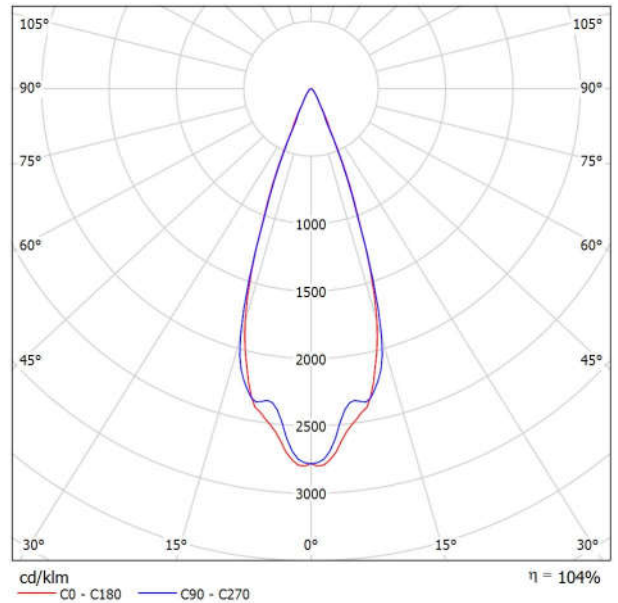

Luminaire classification according to CIE: 100  
CIE flux code: 96 99 100 100 104

Griven Srl AL4990WICW RUBY MC R CW WIDE sym

Article No.: AL4990WICW  
Luminous flux (Luminaire): 2197 lm  
Luminous flux (Lamps): 2117 lm  
Luminaire Wattage: 58.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 96 99 100 100 104  
Fitting: 1 x XP G3 (Correction Factor 1.000).

Featuring shallow recessed depth, RUBY MC R CW will unquestionably allow comfortable in-ground installation. This newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY MC R CW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The cold white light configuration features an unprecedented white light output for a refined range of application purposes. In order to access functions like DMX addressing, stand-alone operations and DMX channels configuration you must use our Infrared Remote Control (Code Ref. AL1321). A 2000 Kg deadweight capacity makes this recessed fitting suitable for ground mounting applications even in vehicled areas. The Polar Edition features an integrated de-icing system with electrically heated glass, which assures a comfortable functioning even in the utmost severe cold weather conditions.




Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4990WICW RUBY MC R CW WIDE sym / Cone Diagram**

Luminaire: Griven Srl AL4990WICW RUBY MC R CW WIDE sym  
Lamps: 1 x XP-G3

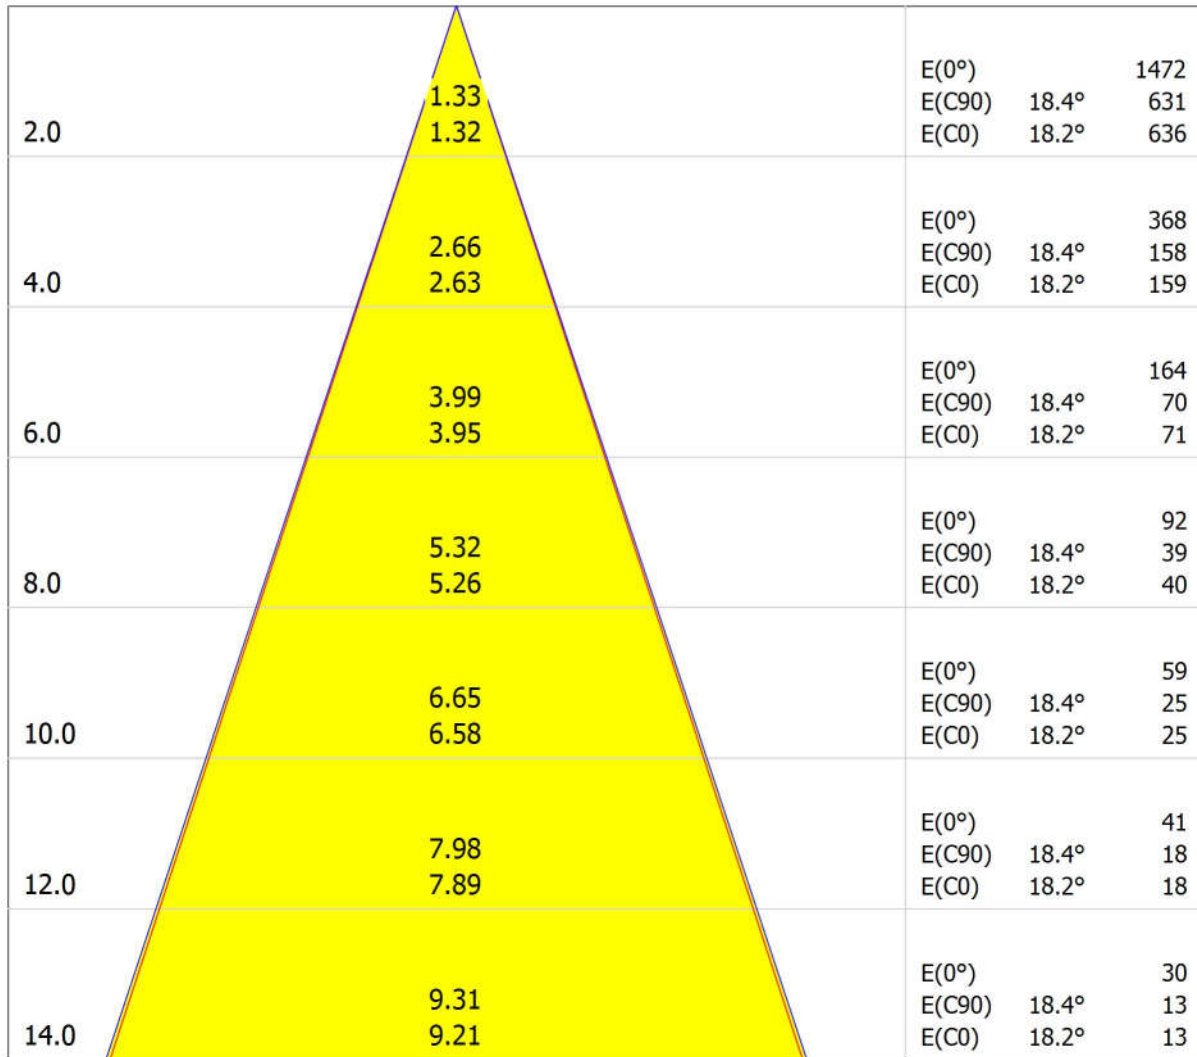

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]

— C0 - C180 (Half-value Angle: 36.4°)  
— C90 - C270 (Half-value Angle: 36.8°)