

## Ruby R RGBW



Date: 06.06.2018  
Operator: PR


Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992SPRW Ruby R RGBW Spot sym / Luminaire Data Sheet**



Luminous emittance 1:

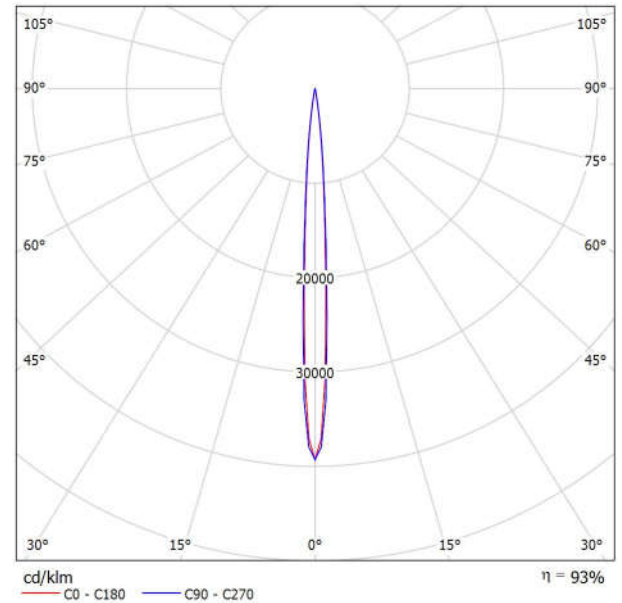

Luminaire classification according to CIE: 100  
CIE flux code: 98 99 100 100 94

Griven Srl AL4992SPRW Ruby R RGBW Spot sym

Article No.: AL4992SPRW  
Luminous flux (Luminaire): 1478 lm  
Luminous flux (Lamps): 1581 lm  
Luminaire Wattage: 36.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 98 99 100 100 94  
Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992SPRW Ruby R RGBW Spot sym / Cone Diagram**

Luminaire: Griven Srl AL4992SPRW Ruby R RGBW Spot sym  
Lamps: 1 x LED

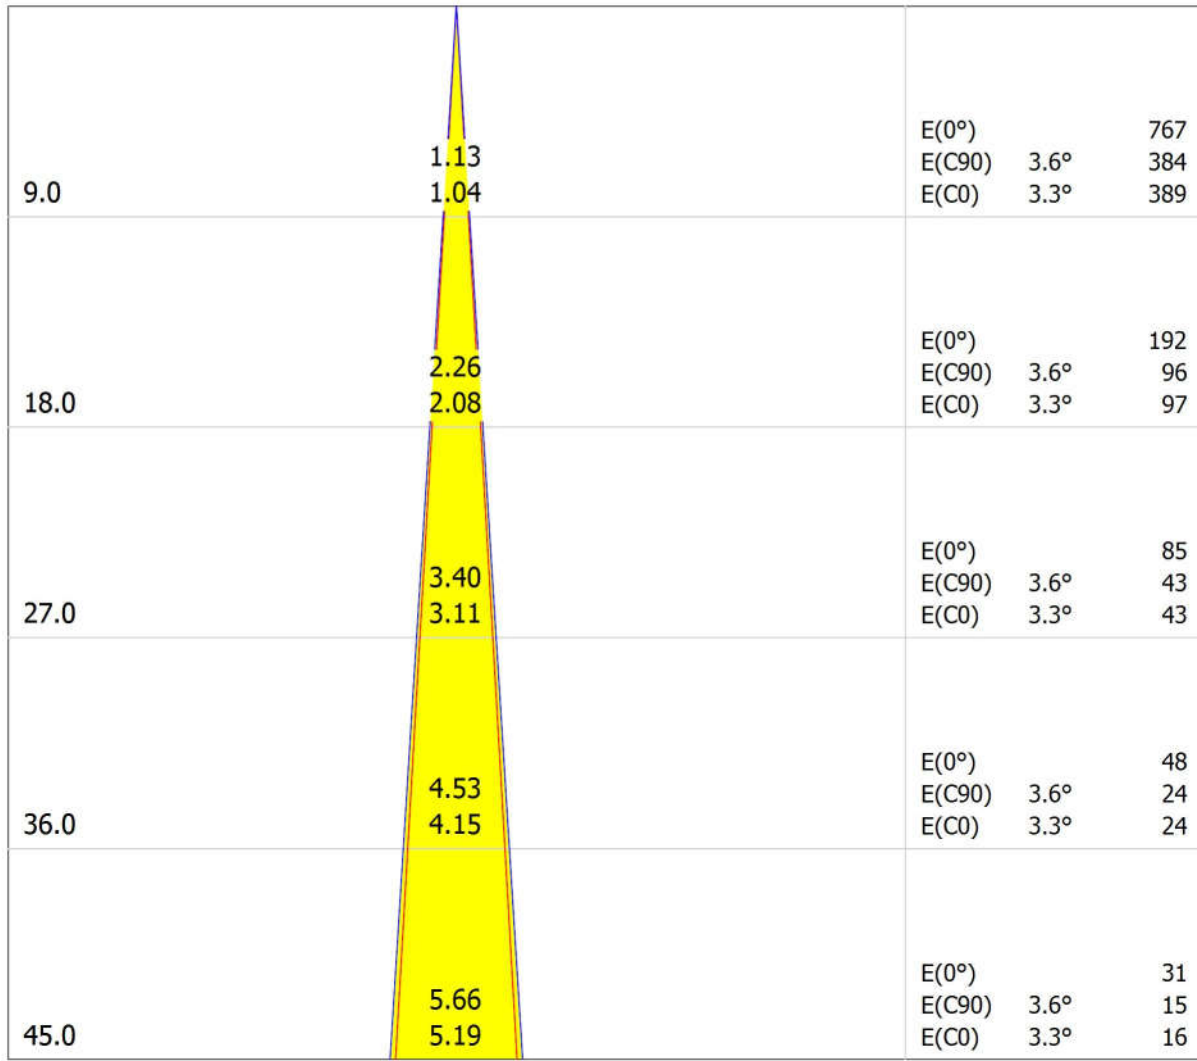

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 6.6°)
- C90 - C270 (Half-value Angle: 7.2°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992NARW Ruby R RGBW Narrow sym / Luminaire Data Sheet**

Luminous emittance 1:

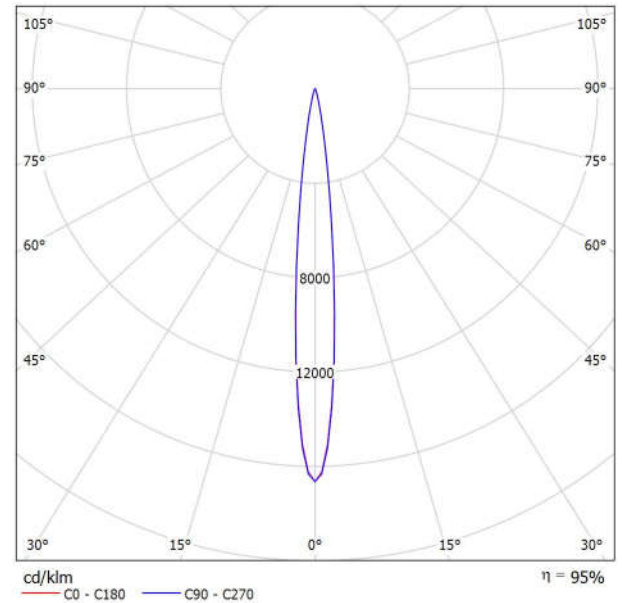

Luminaire classification according to CIE: 100  
CIE flux code: 98 99 100 100 96

Griven Srl AL4992NARW Ruby R RGBW Narrow sym

Article No.: AL4992NARW

Luminous flux (Luminaire): 1474 lm

Luminous flux (Lamps): 1545 lm

Luminaire Wattage: 36.0 W

Luminaire classification according to CIE: 100

CIE flux code: 98 99 100 100 96

Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992NARW Ruby R RGBW Narrow sym / Cone Diagram**

Luminaire: Griven Srl AL4992NARW Ruby R RGBW Narrow sym  
Lamps: 1 x LED

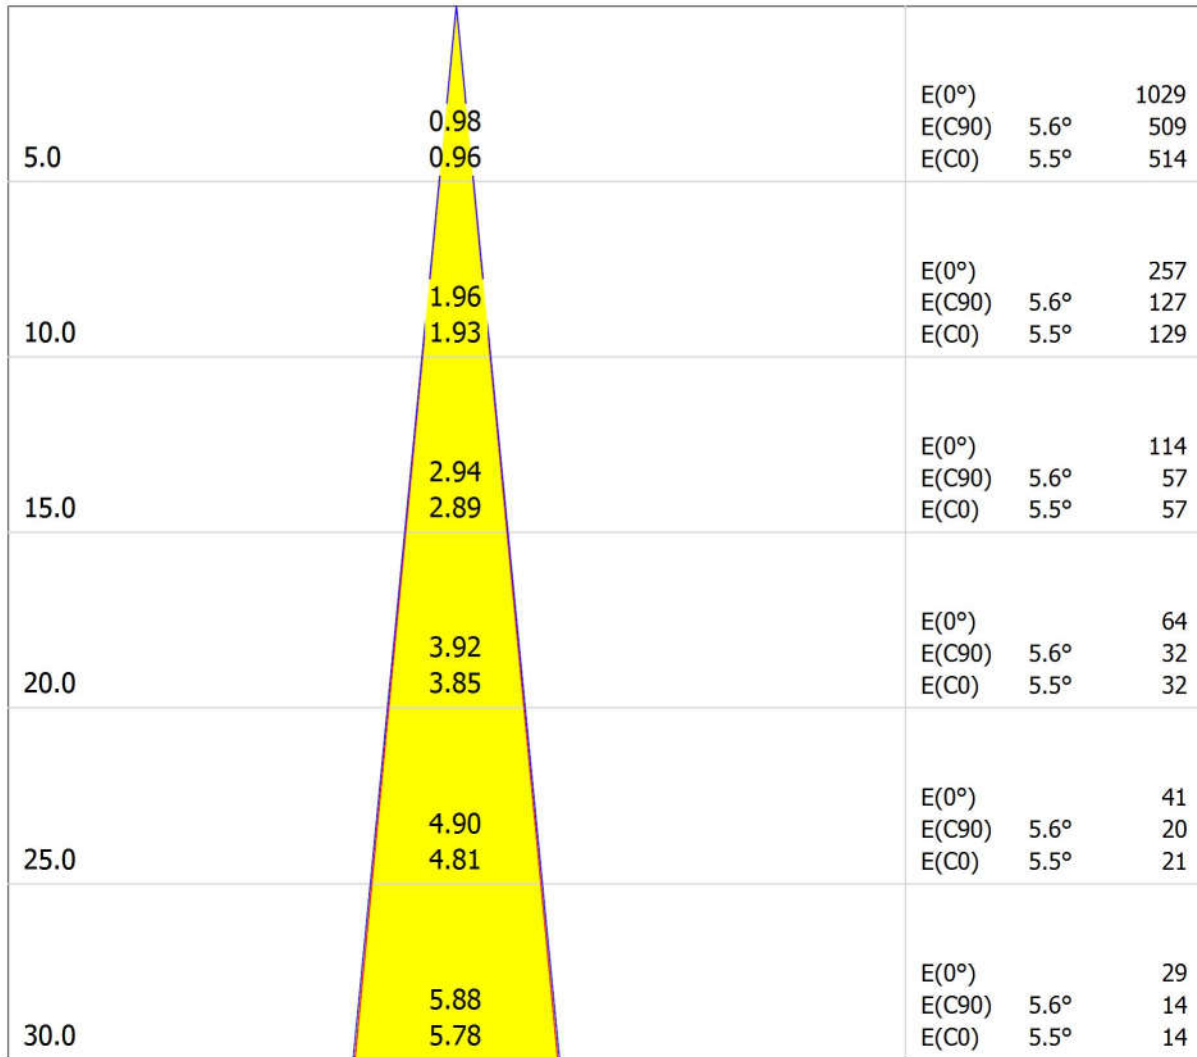

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 11.0°)
- C90 - C270 (Half-value Angle: 11.2°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992MERW Ruby R RGBW Medium sym / Luminaire Data Sheet**

Luminous emittance 1:

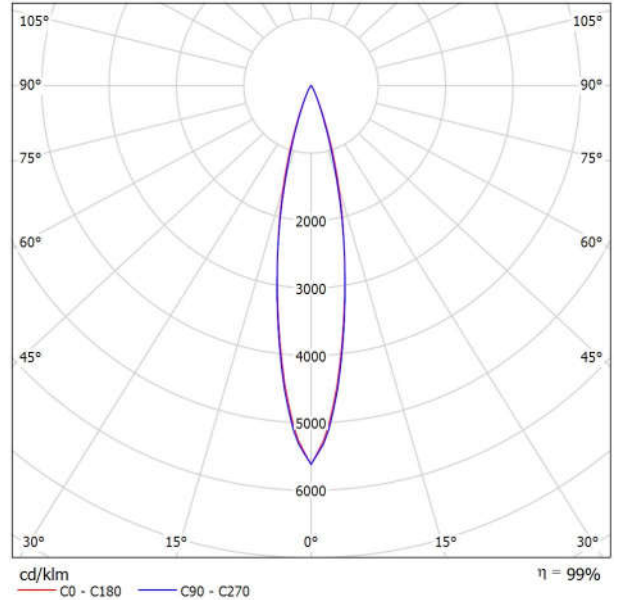

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 99

Griven Srl AL4992MERW Ruby R RGBW  
Medium sym  
Article No.: AL4992MERW  
Luminous flux (Luminaire): 1401 lm  
Luminous flux (Lamps): 1419 lm  
Luminaire Wattage: 36.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 99  
Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992MERW Ruby R RGBW Medium sym / Cone Diagram**

Luminaire: Griven Srl AL4992MERW Ruby R RGBW Medium sym  
Lamps: 1 x LED

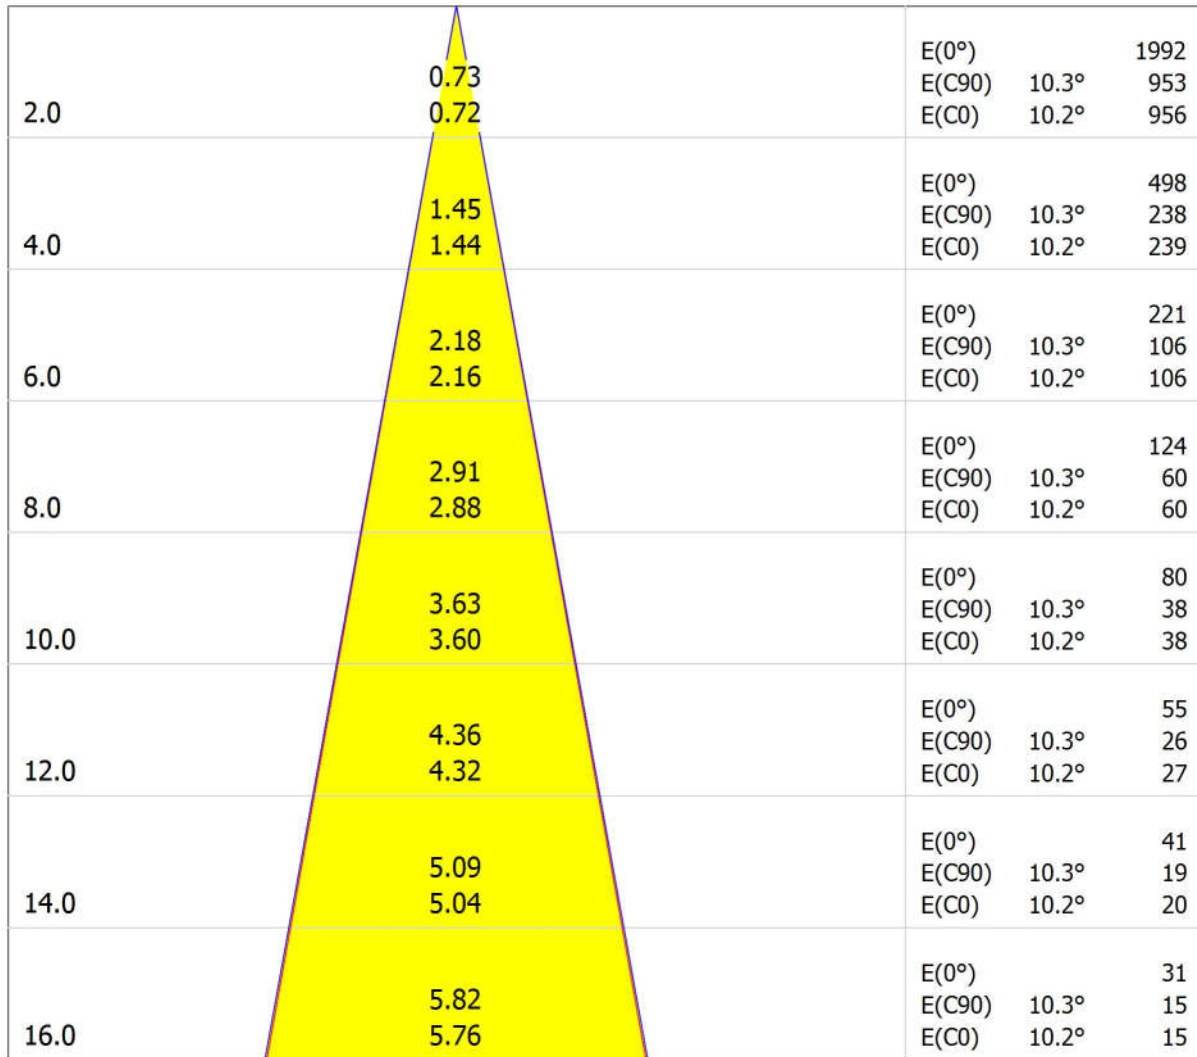

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 20.4°)
- C90 - C270 (Half-value Angle: 20.6°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992WIRW Ruby R RGBW Wide sym / Luminaire Data Sheet**

Luminous emittance 1:

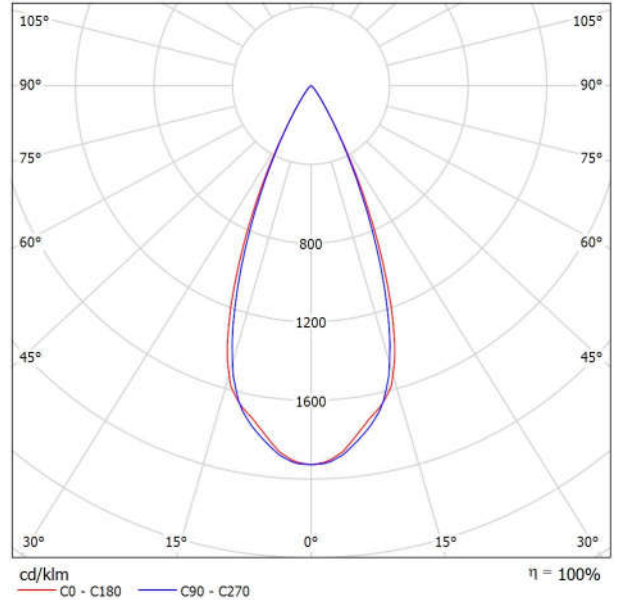

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 100

Griven Srl AL4992WIRW Ruby R RGBW Wide sym

Article No.: AL4992WIRW

Luminous flux (Luminaire): 1413 lm

Luminous flux (Lamps): 1410 lm

Luminaire Wattage: 36.0 W

Luminaire classification according to CIE: 100

CIE flux code: 97 99 100 100 100

Fitting: 1 x LED (Correction Factor 1.000).

Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.




Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992WIRW Ruby R RGBW Wide sym / Cone Diagram**

Luminaire: Griven Srl AL4992WIRW Ruby R RGBW Wide sym  
Lamps: 1 x LED

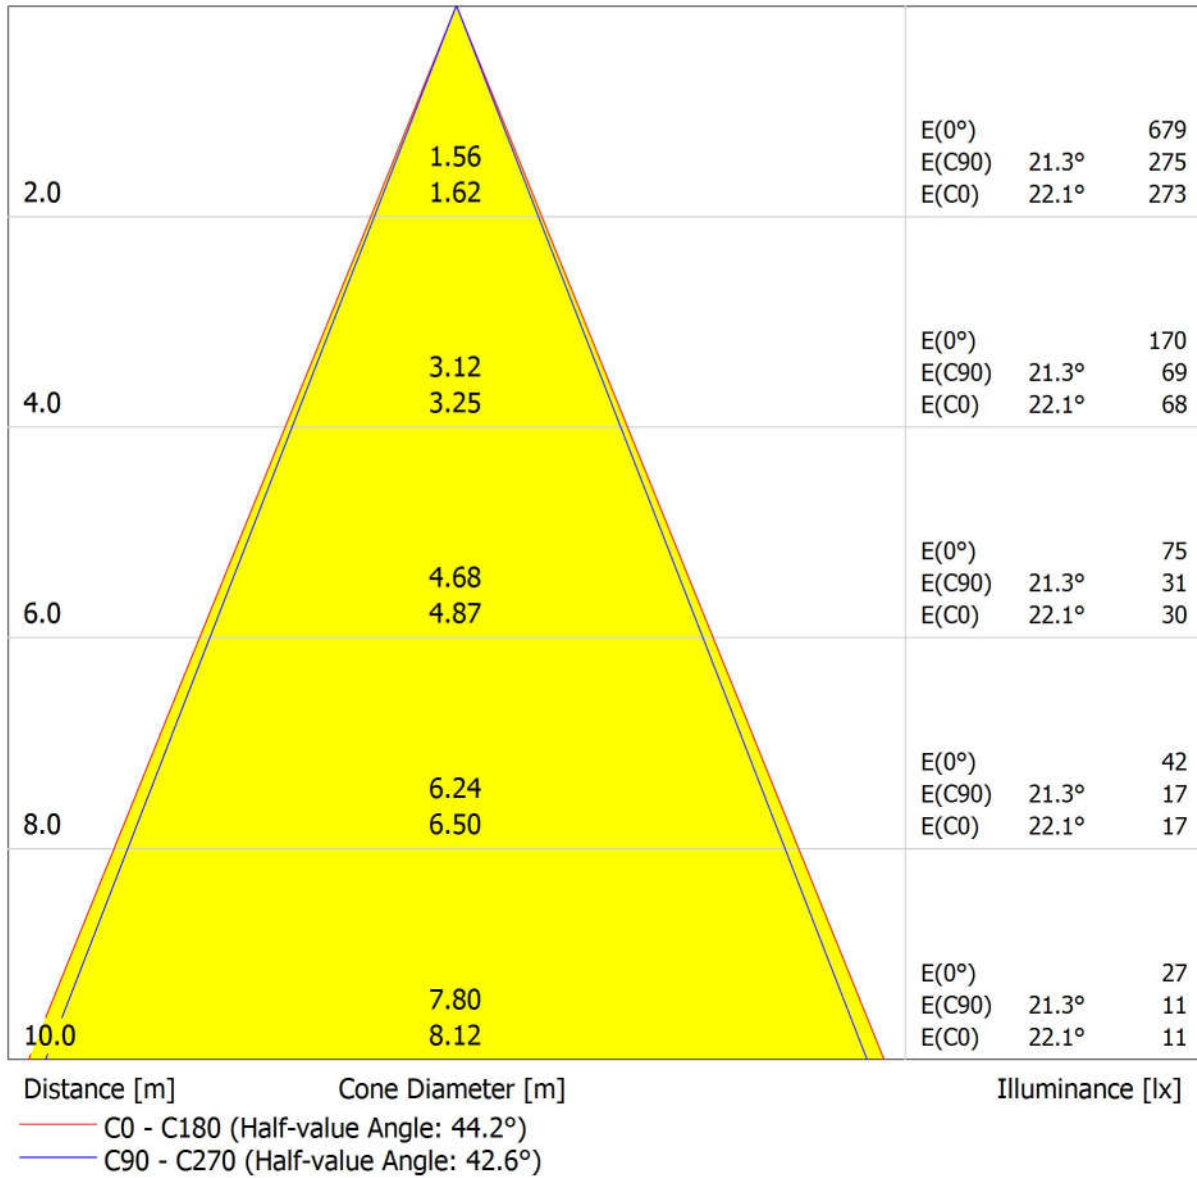


Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

## Griven srl AL4992EWRW Ruby R RGBW Extrawide sym / Luminaire Data Sheet

Luminous emittance 1:

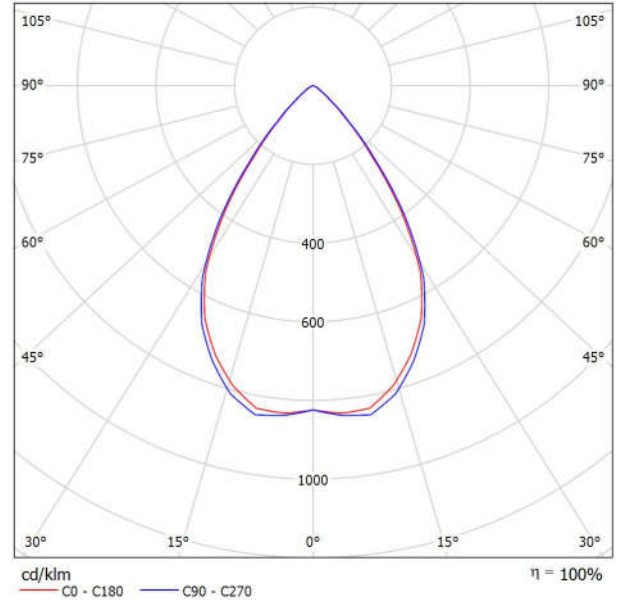

Luminaire classification according to CIE: 100  
CIE flux code: 88 99 100 100 100

Griven srl AL4992EWRW Ruby R RGBW  
Extrawide sym  
Article No.: AL4992EWRW  
Luminous flux (Luminaire): 1302 lm  
Luminous flux (Lamps): 1307 lm  
Luminaire Wattage: 36.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 88 99 100 100 100  
Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven srl AL4992EWRW Ruby R RGBW Extrawide sym / Cone Diagram**

Luminaire: Griven srl AL4992EWRW Ruby R RGBW Extrawide sym  
Lamps: 1 x LED

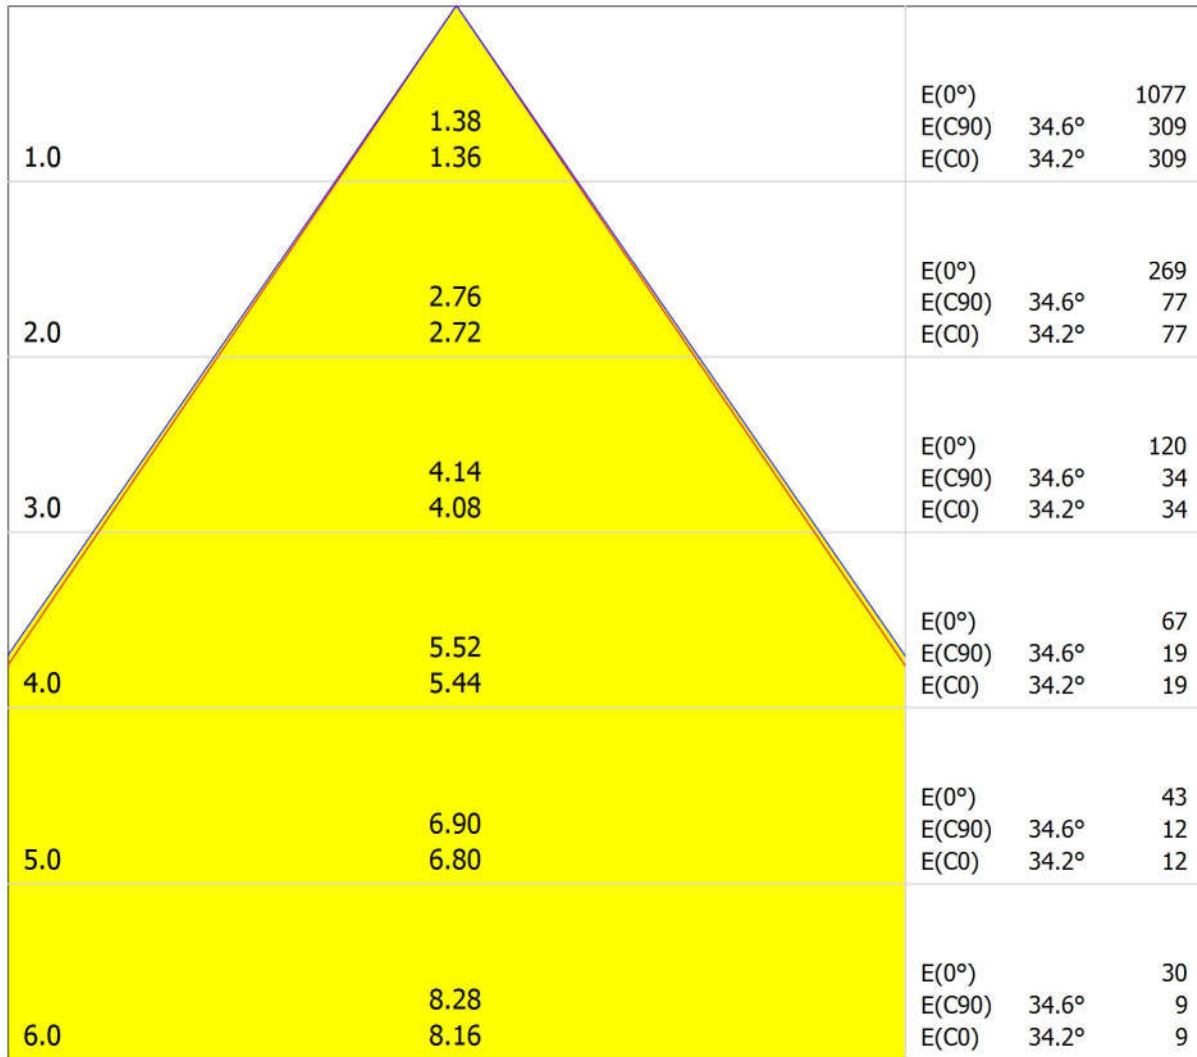

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 68.4°)
- C90 - C270 (Half-value Angle: 69.2°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992ELRW Ruby R RGBW Elliptical sym / Luminaire Data Sheet**

Luminous emittance 1:

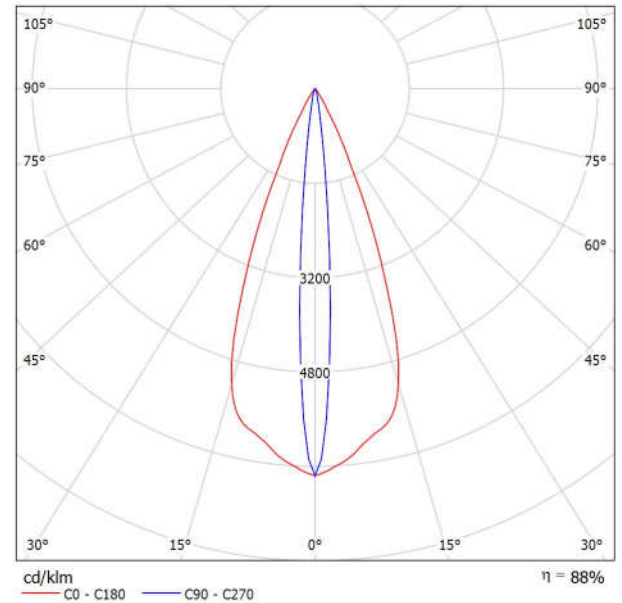

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 88

Griven Srl AL4992ELRW Ruby R RGBW Elliptical sym

Article No.: AL4992ELRW

Luminous flux (Luminaire): 1247 lm

Luminous flux (Lamps): 1423 lm

Luminaire Wattage: 36.0 W

Luminaire classification according to CIE: 100

CIE flux code: 97 99 100 100 88

Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992ELRW Ruby R RGBW Elliptical sym / Cone Diagram**

Luminaire: Griven Srl AL4992ELRW Ruby R RGBW Elliptical sym  
Lamps: 1 x LED

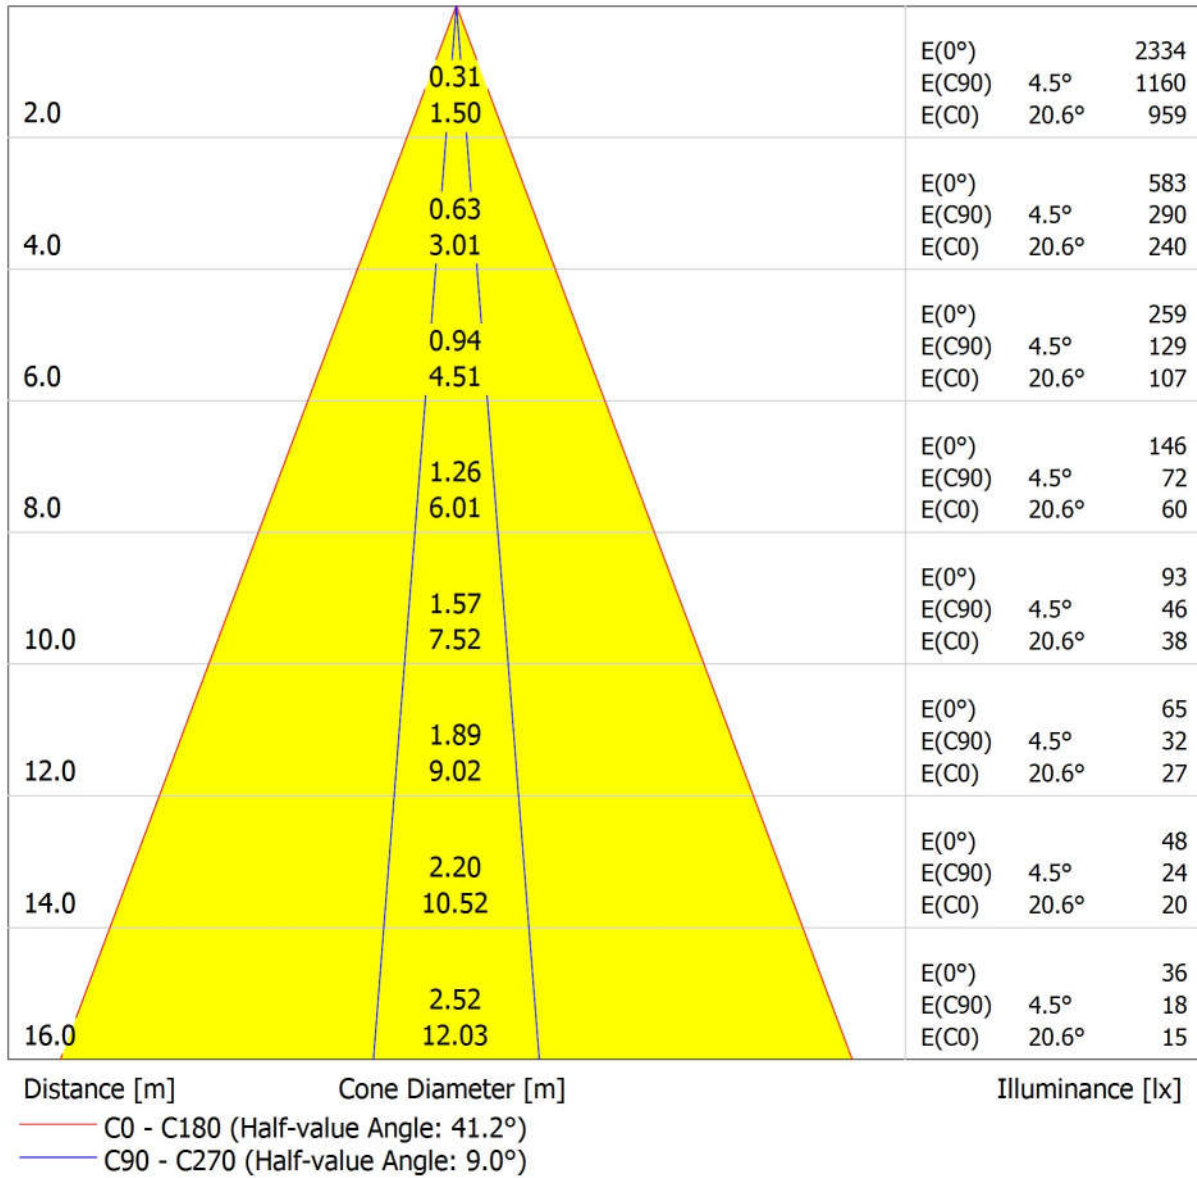


Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992WLRW Ruby R RGBW Elliptical Wide sym / Luminaire Data Sheet**

Luminous emittance 1:

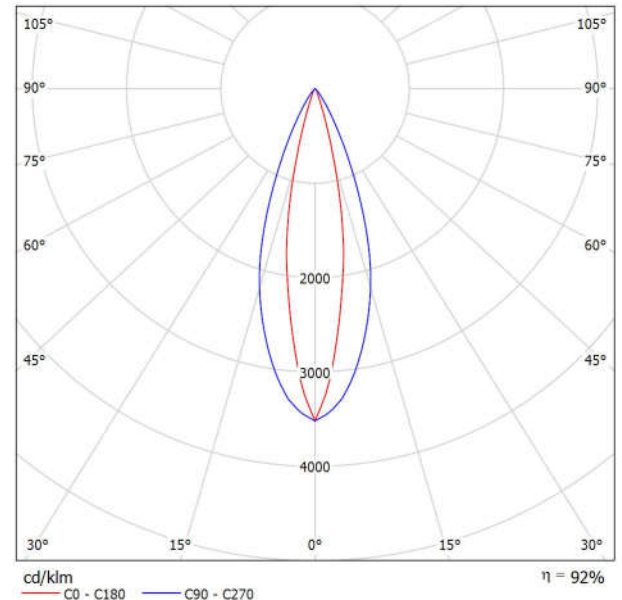

Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 92

Griven Srl AL4992WLRW Ruby R RGBW  
Elliptical Wide sym  
Article No.: AL4992WLRW  
Luminous flux (Luminaire): 1179 lm  
Luminous flux (Lamps): 1281 lm  
Luminaire Wattage: 36.0 W  
Luminaire classification according to CIE: 100  
CIE flux code: 97 99 100 100 92  
Fitting: 1 x LED (Correction Factor 1.000).


Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven Srl AL4992WLRW Ruby R RGBW Elliptical Wide sym / Cone Diagram**

Luminaire: Griven Srl AL4992WLRW Ruby R RGBW Elliptical Wide sym  
Lamps: 1 x LED

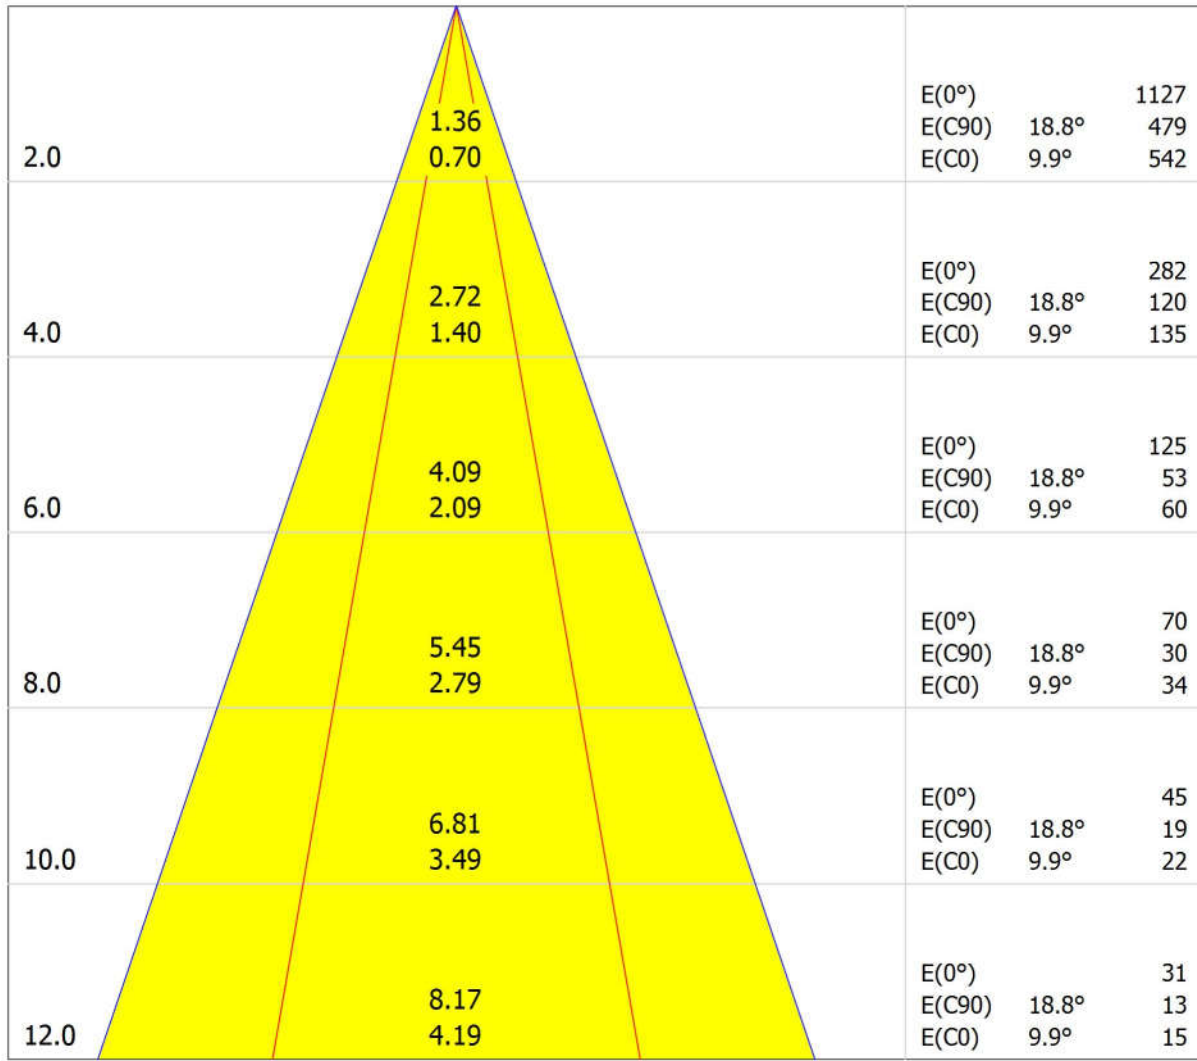

Distance [m]                      Cone Diameter [m]                      Illuminance [lx]


- C0 - C180 (Half-value Angle: 19.8°)
- C90 - C270 (Half-value Angle: 37.6°)

Griven S.r.l.  
Via Bulgaria, 16  
46042 Castel Goffredo, MN, Italy

Operator PR  
Telephone 0376779483  
Fax 0376779682  
e-Mail griven@griven.com

**Griven srl AL4992WWRW Ruby R RGBW Wall Wash / Luminaire Data Sheet**

Luminous emittance 1:

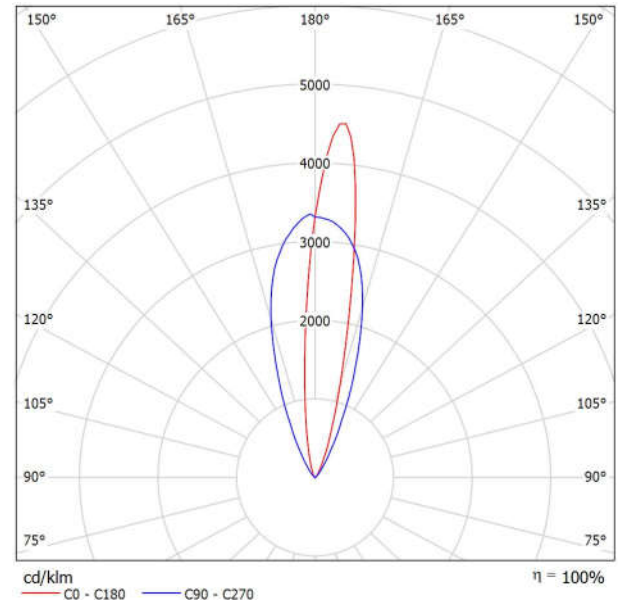

Luminaire classification according to CIE: 0  
CIE flux code: 00 00 03 00 100

Griven srl AL4992WWRW Ruby R RGBW Wall Wash

Article No.: AL4992WWRW

Luminous flux (Luminaire): 1355 lm

Luminous flux (Lamps): 1361 lm

Luminaire Wattage: 36.0 W

Luminaire classification according to CIE: 0

CIE flux code: 00 00 03 00 100

Fitting: 1 x LED (Correction Factor 1.000).

Featuring shallow recessed depth, RUBY R RGBW will unquestionably allow comfortable in-ground installation. Fitted with 20 RGBW LEDs, this newly engineered compact and versatile light fitting is a highly performing LED wall washer specifically designed for exterior recessed applications. IP67 rated, RUBY R RGBW is ideal for spot lighting and wall grazing owing to the wide selection of exchangeable optics groups available, ranging from spot aperture beams to wall wash distribution. The colour changer version is based on an efficient combination of strikingly powerful RGBW LEDs, that provides an unprecedented astonishing white light output quality plus a wider variety of intermediate colour hues, offer the maximum lighting design flexibility. The 2000 Kg deadweight load capacity makes this recessed fitting suitable for ground mounting applications even in vehicular areas.