

Parade C-36 RGB



Date: 13.06.2018
Operator: PR


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379SPRG Parade C 36 Spot RGB / Luminaire Data Sheet



Luminous emittance 1:

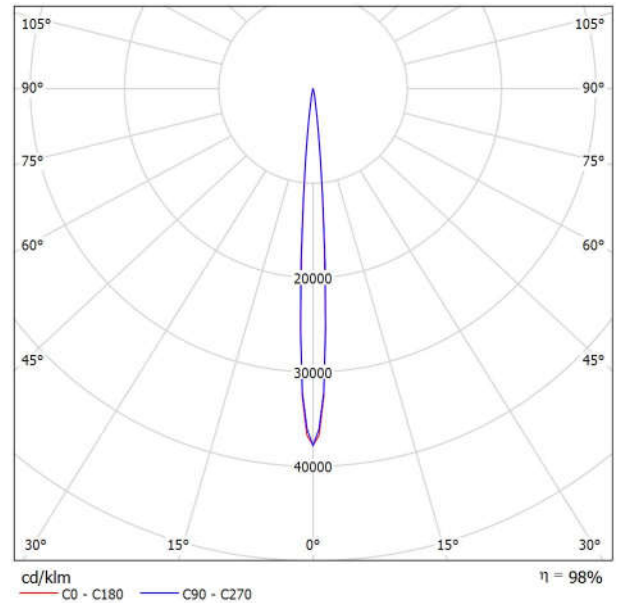

Luminaire classification according to CIE: 100
CIE flux code: 99 100 100 100 100

Griven srl AL4379SPRG Parade C 36 Spot RGB
Article No.: AL4379SPRG
Luminous flux (Luminaire): 1402 lm
Luminous flux (Lamps): 1424 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 99 100 100 100 100
Fitting: 36 x Cree XP-E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379SPRG Parade C 36 Spot RGB / Cone Diagram

Luminaire: Griven srl AL4379SPRG Parade C 36 Spot RGB
Lamps: 36 x Cree XP-E

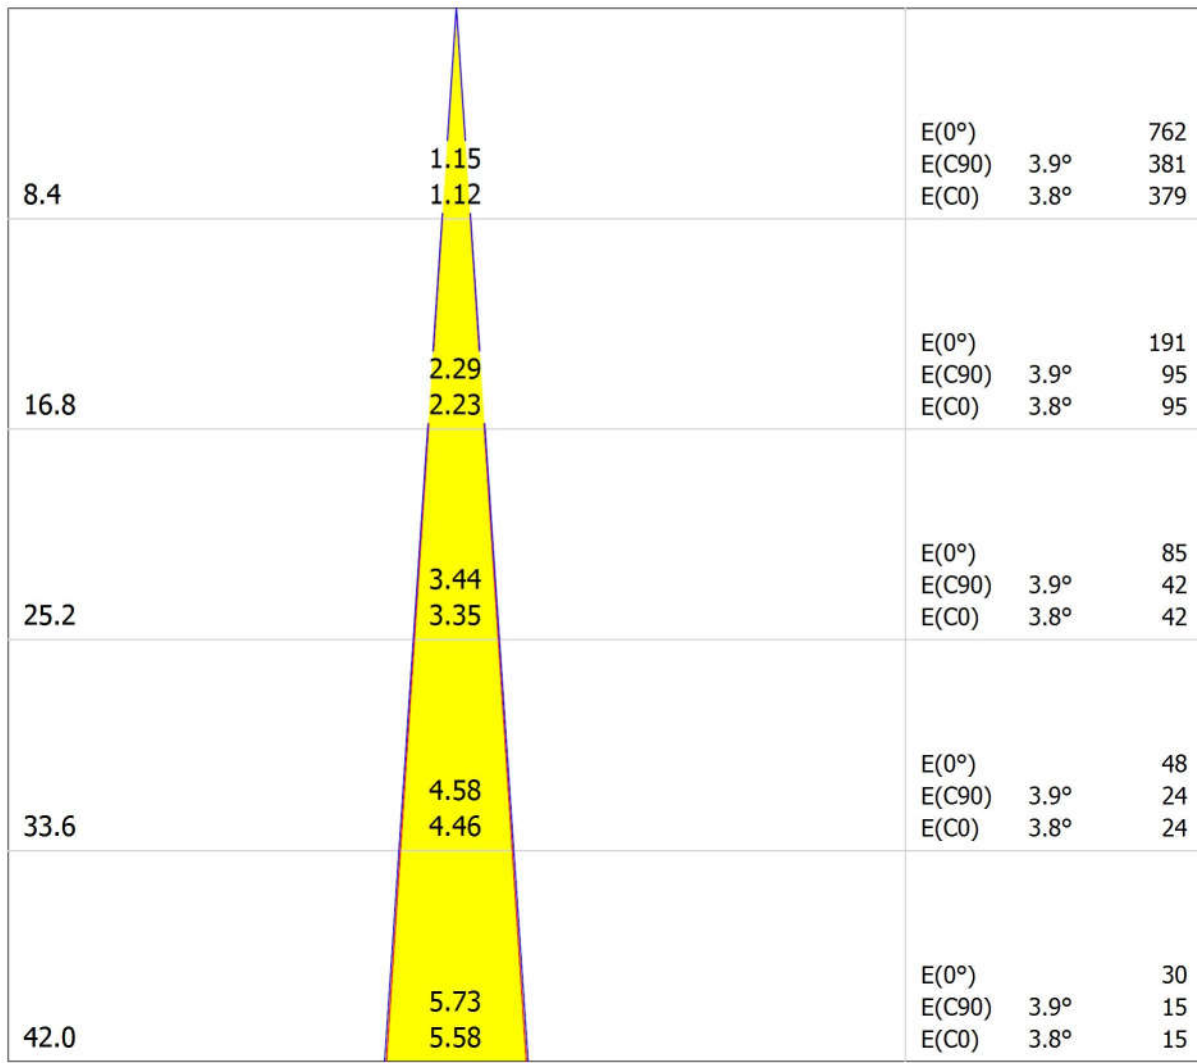

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 7.6°)
- C90 - C270 (Half-value Angle: 7.8°)


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379NARG Parade C 36 Narrow RGB / Luminaire Data Sheet



Luminous emittance 1:

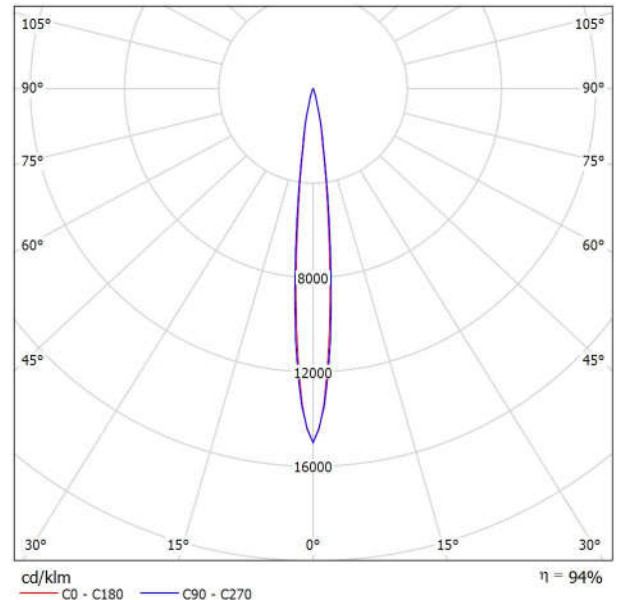

Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 94

Griven srl AL4379NARG Parade C 36 Narrow
RGB

Article No.: AL4379NARG

Luminous flux (Luminaire): 1251 lm

Luminous flux (Lamps): 1338 lm

Luminaire Wattage: 40.0 W

Luminaire classification according to CIE: 100

CIE flux code: 98 100 100 100 94

Fitting: 36 x Cree XP-E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379NARG Parade C 36 Narrow RGB / Cone Diagram

Luminaire: Griven srl AL4379NARG Parade C 36 Narrow RGB
Lamps: 36 x Cree XP-E

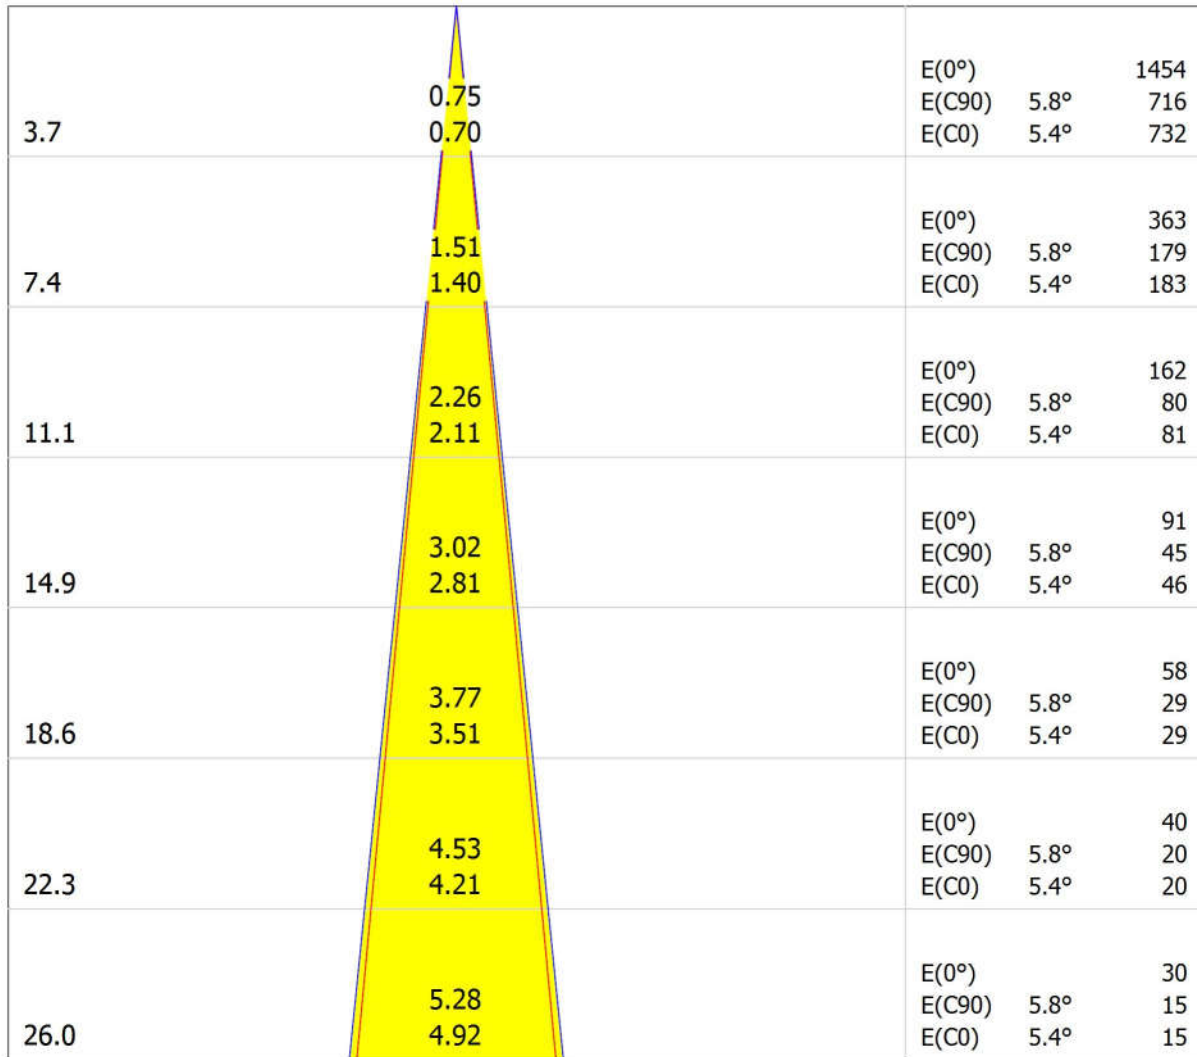

Distance [m] Cone Diameter [m] Illuminance [lx]

— C0 - C180 (Half-value Angle: 10.8°)
— C90 - C270 (Half-value Angle: 11.6°)


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379MERG Parade C 36 Medium RGB / Luminaire Data Sheet



Luminous emittance 1:

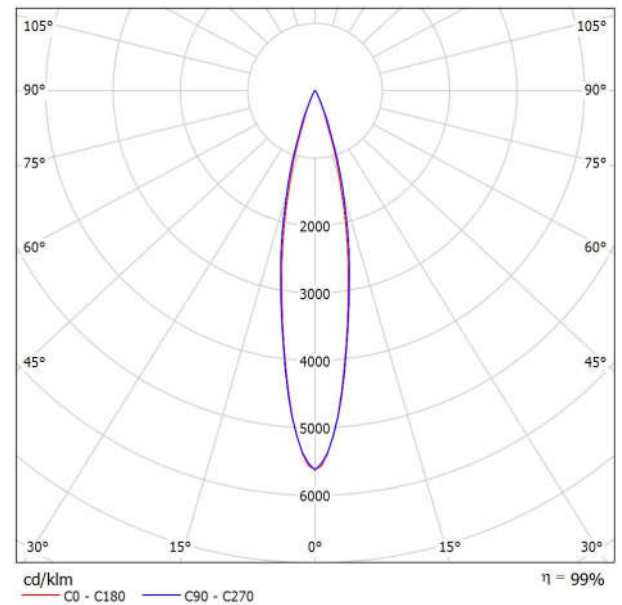

Luminaire classification according to CIE: 100
CIE flux code: 97 99 100 100 100

Griven srl AL4379MERG Parade C 36 Medium RGB

Article No.: AL4379MERG

Luminous flux (Luminaire): 1255 lm

Luminous flux (Lamps): 1267 lm

Luminaire Wattage: 40.0 W

Luminaire classification according to CIE: 100

CIE flux code: 97 99 100 100 100

Fitting: 36 x Cree XP E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379MERG Parade C 36 Medium RGB / Cone Diagram

Luminaire: Griven srl AL4379MERG Parade C 36 Medium RGB
Lamps: 36 x Cree XP-E

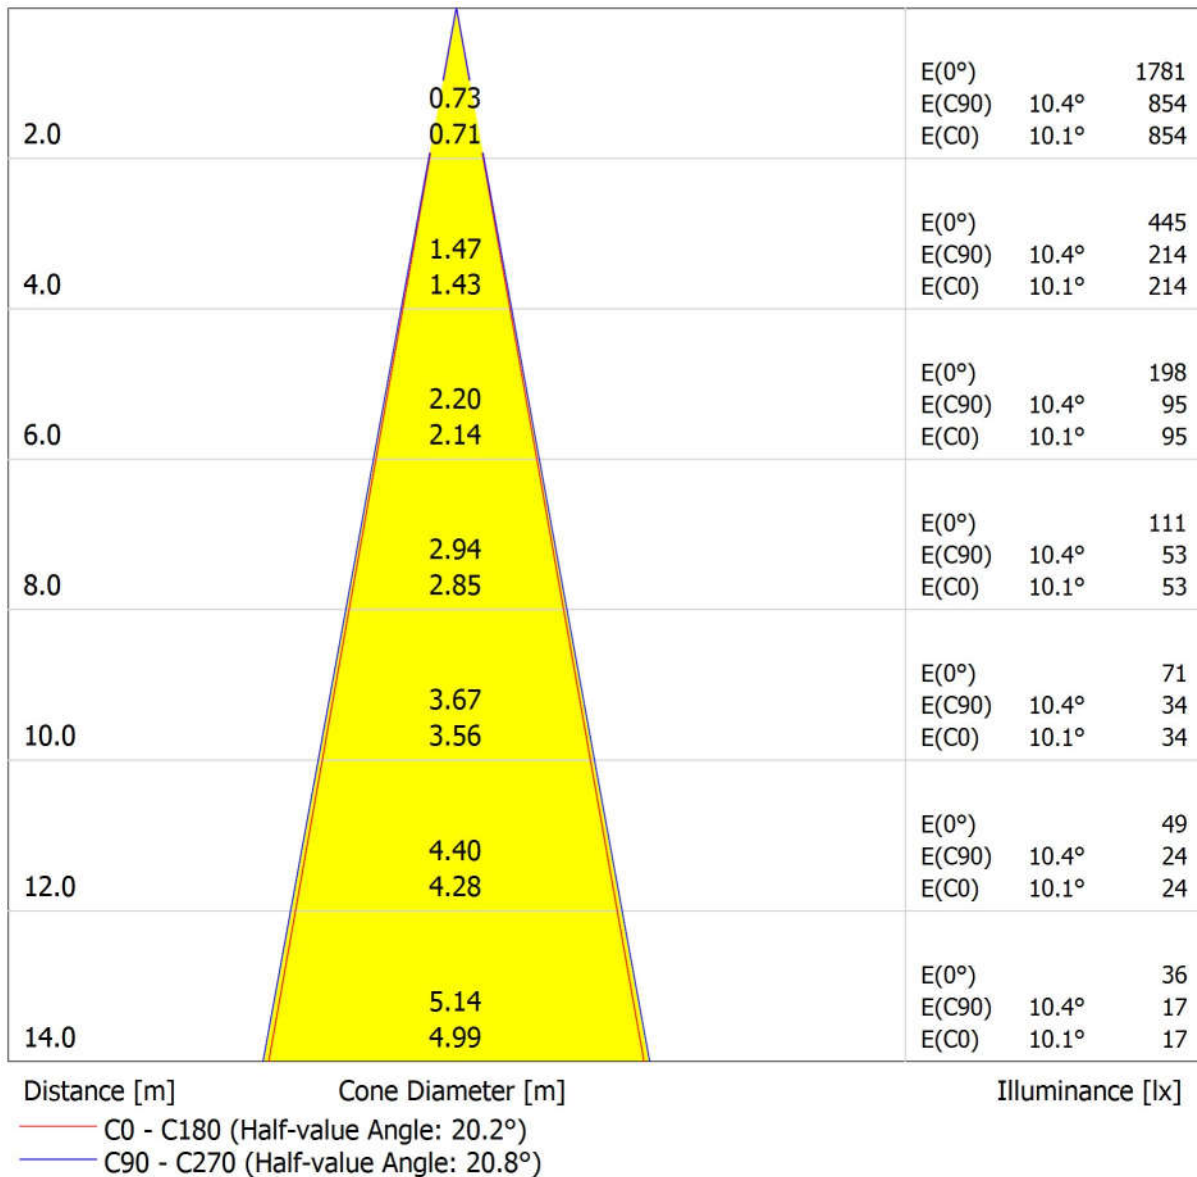


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379WIRG Parade C 36 Wide RGB / Luminaire Data Sheet



Luminous emittance 1:

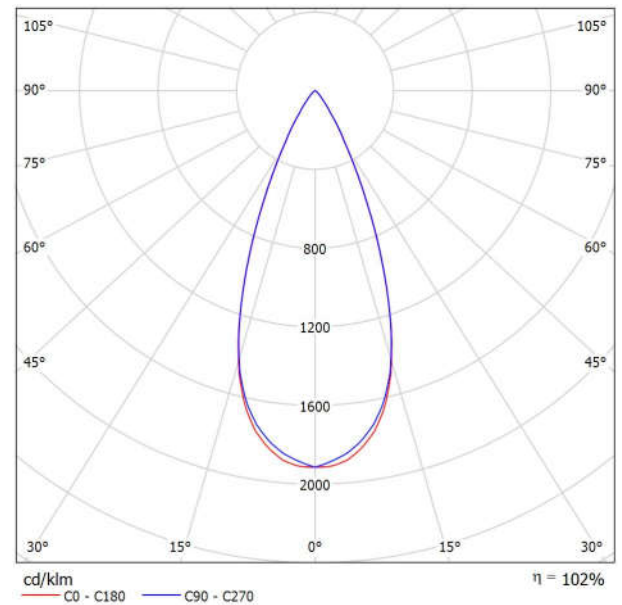

Luminaire classification according to CIE: 100
CIE flux code: 96 100 100 100 102

Griven srl AL4379WIRG Parade C 36 Wide RGB
Article No.: AL4379WIRG
Luminous flux (Luminaire): 1267 lm
Luminous flux (Lamps): 1247 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 96 100 100 100 102
Fitting: 36 x Cree XP-E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379WIRG Parade C 36 Wide RGB / Cone Diagram

Luminaire: Griven srl AL4379WIRG Parade C 36 Wide RGB
Lamps: 36 x Cree XP-E

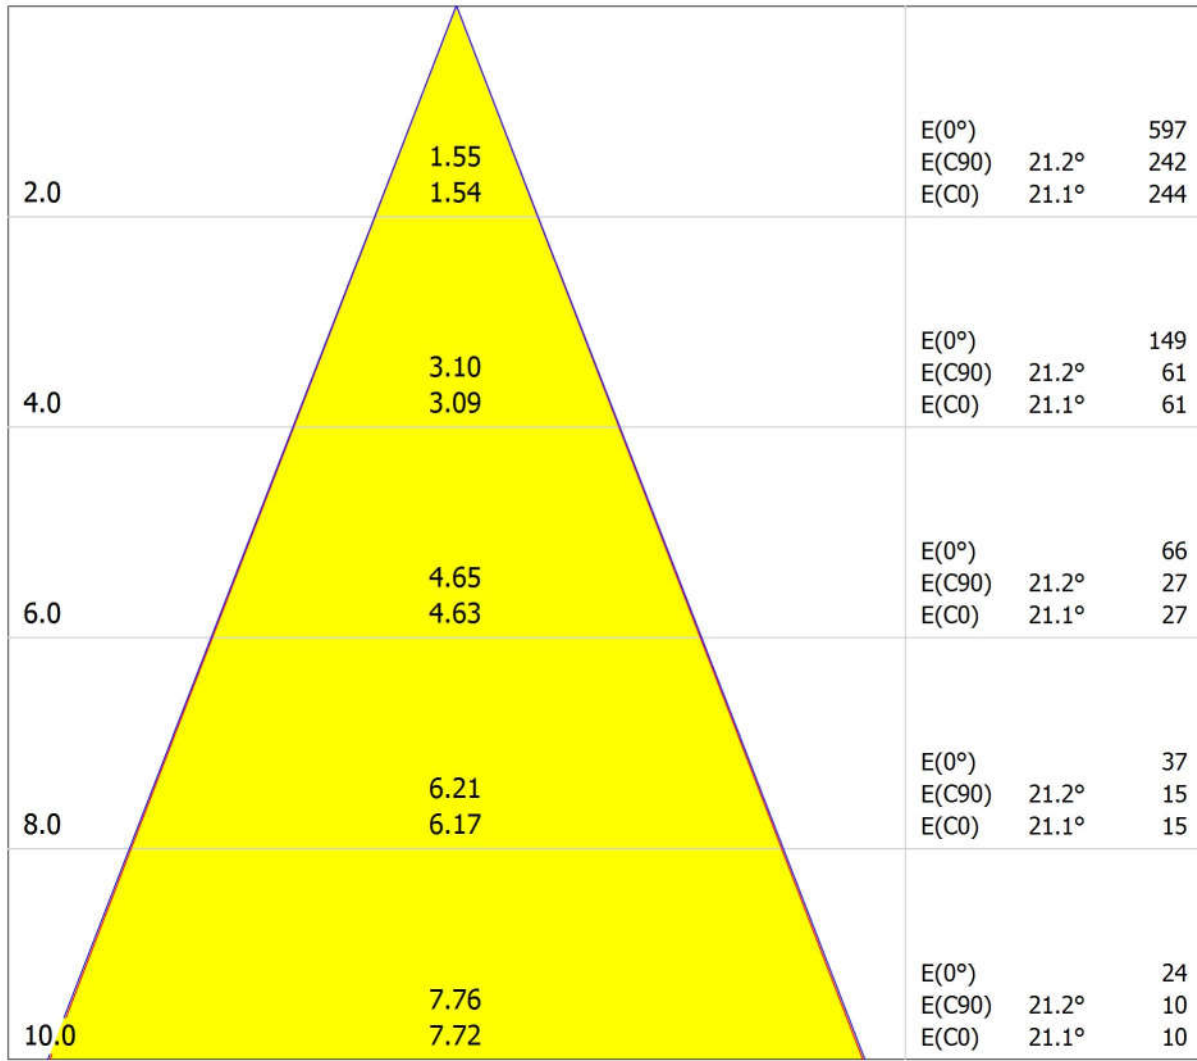

Distance [m] Cone Diameter [m] Illuminance [lx]

- C0 - C180 (Half-value Angle: 42.2°)
- C90 - C270 (Half-value Angle: 42.4°)


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379EWRG Parade C 36 Extra Wide RGB / Luminaire Data Sheet



Luminous emittance 1:

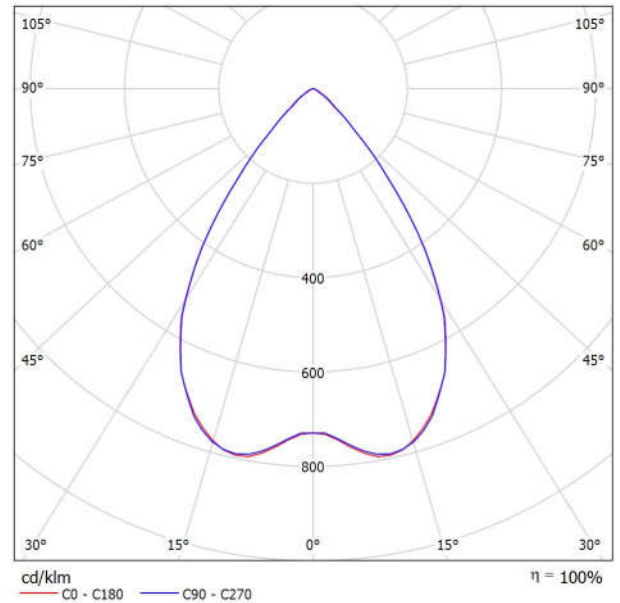

Luminaire classification according to CIE: 100
CIE flux code: 87 99 100 100 100

Griven srl AL4379EWRG Parade C 36 Extra
Wide RGB
Article No.: AL4379EWRG
Luminous flux (Luminaire): 1099 lm
Luminous flux (Lamps): 1103 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 87 99 100 100 100
Fitting: 36 x Cree XP E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379EWRG Parade C 36 Extra Wide RGB / Cone Diagram

Luminaire: Griven srl AL4379EWRG Parade C 36 Extra Wide RGB
Lamps: 36 x Cree XP-E

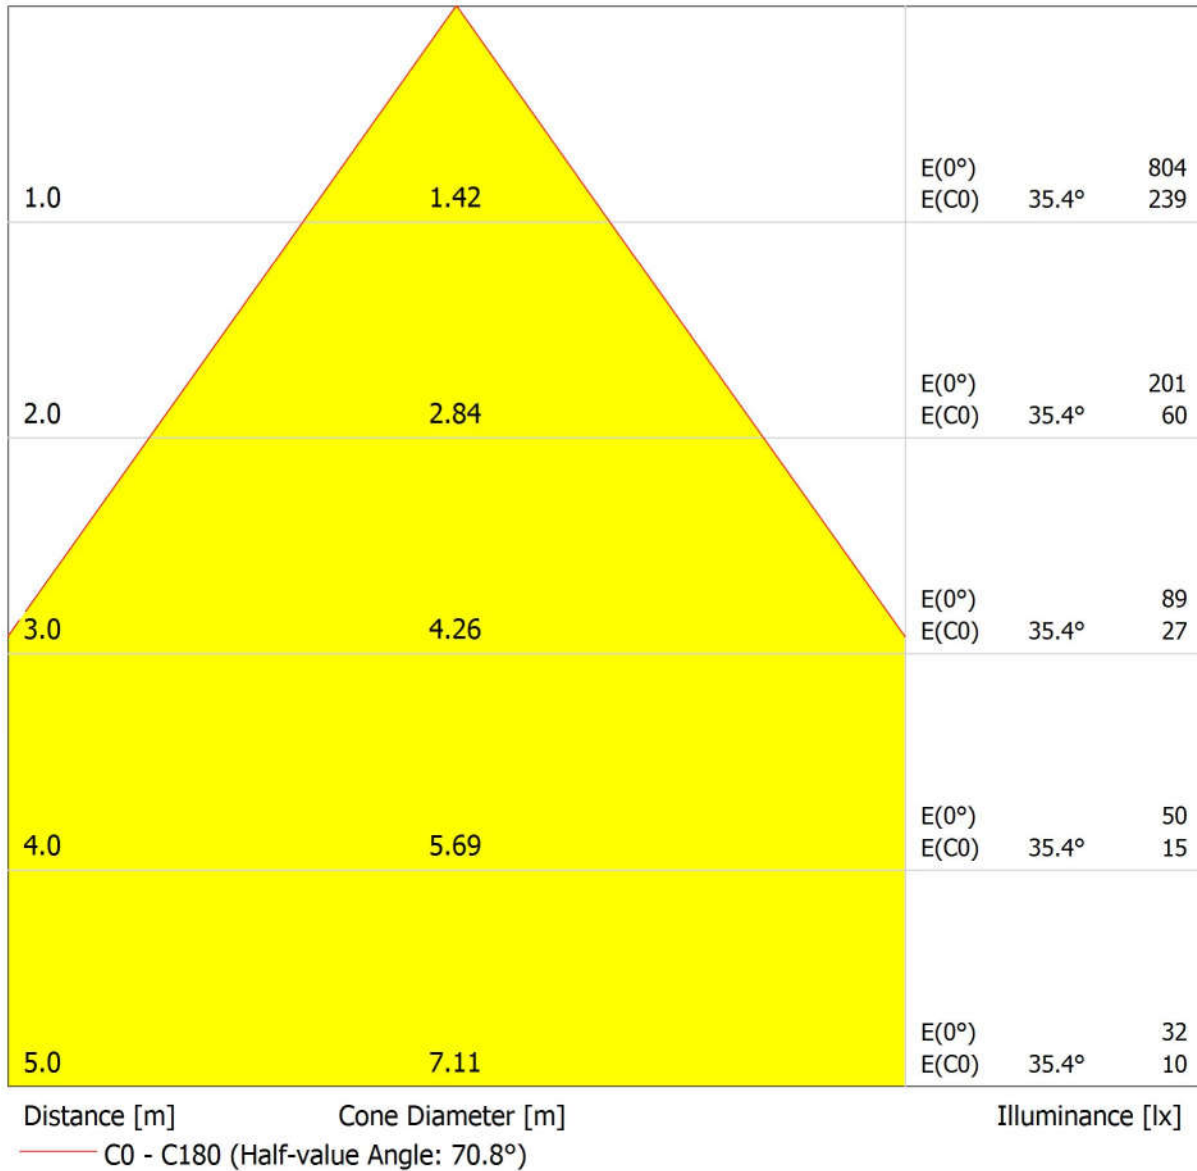


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379ELRG Parade C 36 Elliptical RGB / Luminaire Data Sheet



Luminous emittance 1:

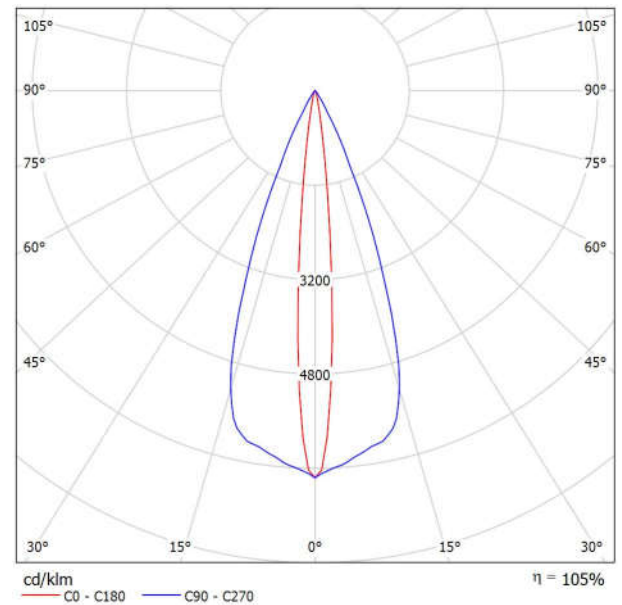

Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 105

Griven srl AL4379ELRG Parade C 36 Elliptical RGB
Article No.: AL4379ELRG
Luminous flux (Luminaire): 1323 lm
Luminous flux (Lamps): 1259 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 98 100 100 100 105
Fitting: 36 x Cree XP-E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379ELRG Parade C 36 Elliptical RGB / Cone Diagram

Luminaire: Griven srl AL4379ELRG Parade C 36 Elliptical RGB
Lamps: 36 x Cree XP-E

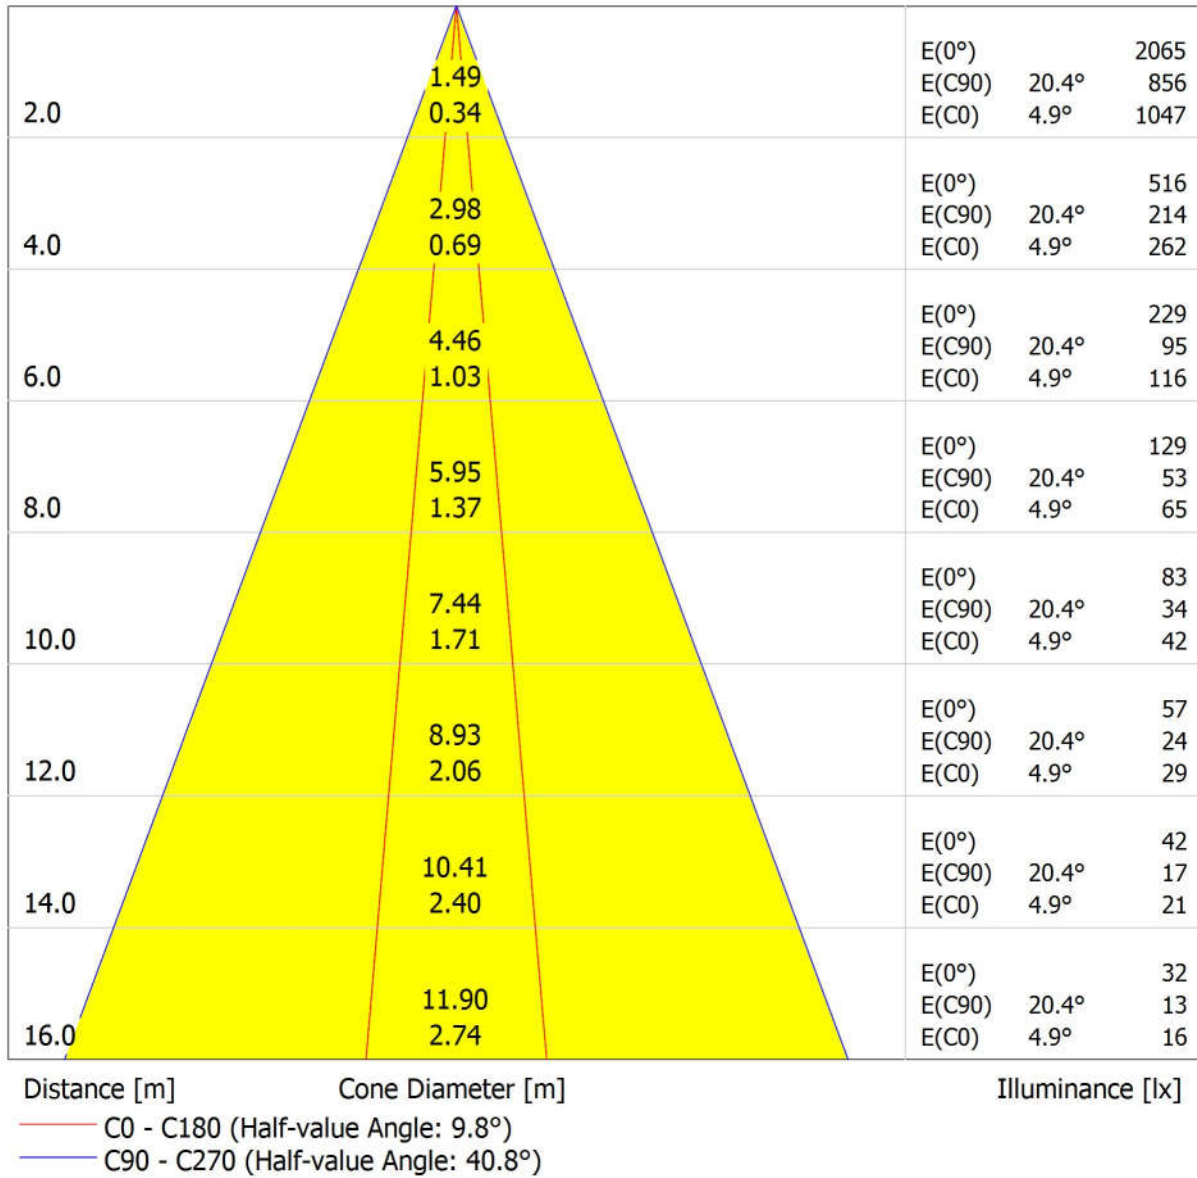


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379WLRG Parade C 36 Elliptical Wide RGB / Luminaire Data Sheet



Luminous emittance 1:

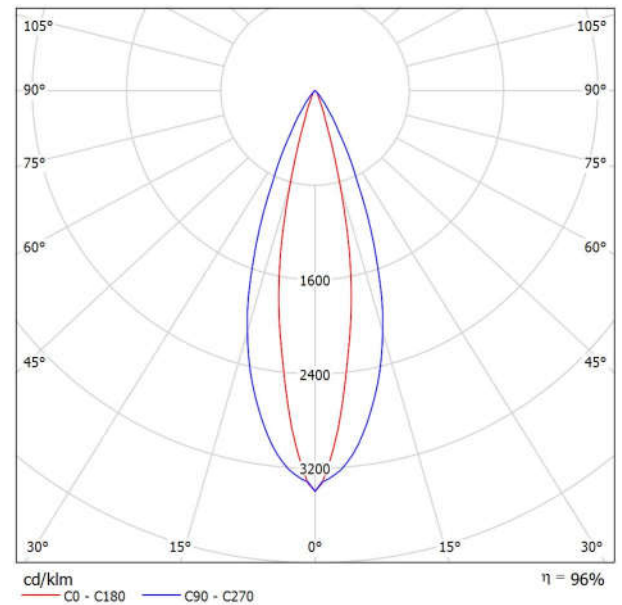

Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 96

Griven srl AL4379WLRG Parade C 36 Elliptical
Wide RGB
Article No.: AL4379WLRG
Luminous flux (Luminaire): 1145 lm
Luminous flux (Lamps): 1199 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 96 99 100 100 96
Fitting: 36 x Cree XP-E (Correction Factor 1.000).


PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.

Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379WLRG Parade C 36 Elliptical Wide RGB / Cone Diagram

Luminaire: Griven srl AL4379WLRG Parade C 36 Elliptical Wide RGB
Lamps: 36 x Cree XP-E

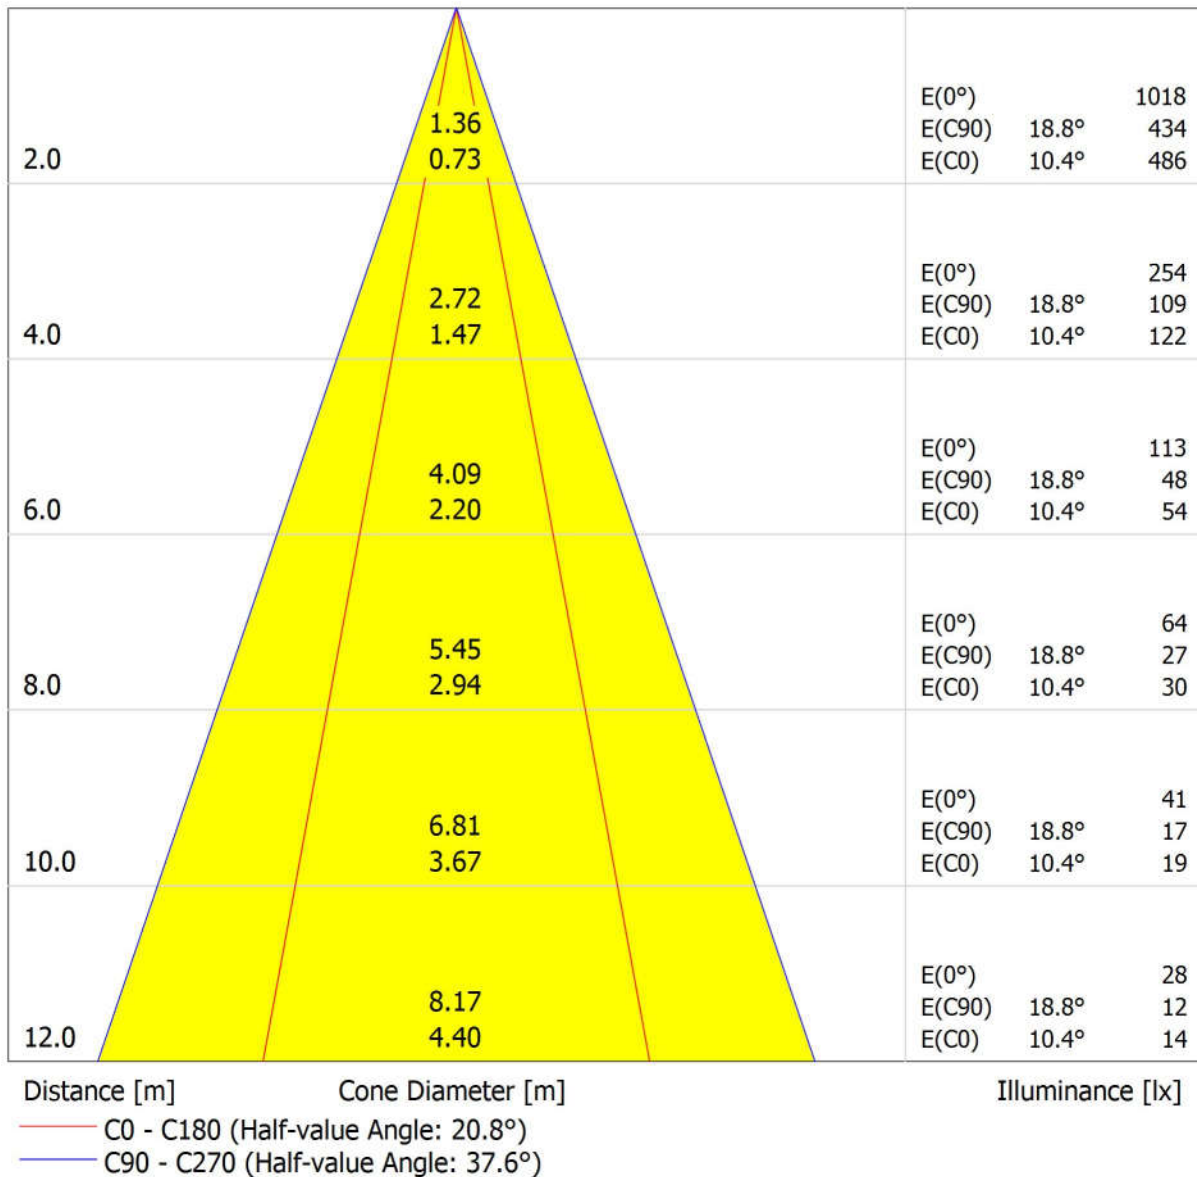


Griven S.r.l.
Via Bulgaria, 16
46042 Castel Goffredo, MN, Italy

Operator PR
Telephone 0376779483
Fax 0376779682
e-Mail griven@griven.com

Griven srl AL4379WWRG Parade C 36 Wall Wash RGB / Luminaire Data Sheet



Luminous emittance 1:

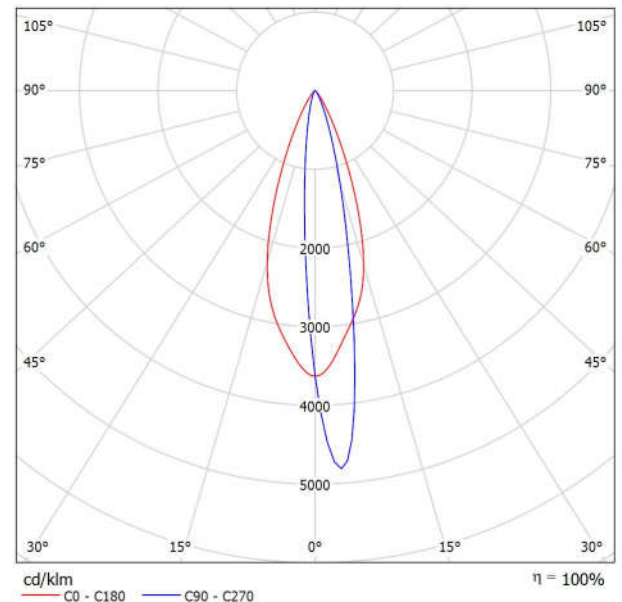

Luminaire classification according to CIE: 100
CIE flux code: 95 98 100 100 100

Griven srl AL4379WWRG Parade C 36 Wall Wash RGB
Article No.: AL4379WWRG
Luminous flux (Luminaire): 1235 lm
Luminous flux (Lamps): 1236 lm
Luminaire Wattage: 40.0 W
Luminaire classification according to CIE: 100
CIE flux code: 95 98 100 100 100
Fitting: 36 x Cree XP E (Correction Factor 1.000).

PARADE C-36 is a surface mount linear RGB LED module featuring superb light distribution designed for true wall grazing effect. PARADE C-36 can be installed in any position and in any orientation, featuring an IP67 weather protection along with a compact size and a light weight manageability. The combination of the 36 RGB LEDs featured and the photometric distribution efficiency offer an unprecedented astonishing light output quality. Moreover, a truly comfortable set up is guaranteed by the integrated power supply unit. The new generation digital control system, obtainable from any four-channel remote DMX512 control desk, includes also standalone functions and Master-Slave mode. The combination of competitive technical features and price makes it the ideal fitting for lower budget solutions.