

ONYX XQ



Specific for architectural projects demanding for impressive though sustainable lighting performance, ONYX XQ features an incomparably functional, ultra-spot, sharp, long-shot beam of light capable of reaching previously unthinkable distances with amazing precision and even light distribution.



TECHNICAL SPECIFICATIONS

96 high brightness RGBW or white power LEDs unit
Continuously variable light intensity
DMX, automatic and Master-Slave mode
Remote firmware update (RFU)
RDM function
Power supply:
standard 100÷277V / 50-60Hz
Power consumption:
1.34A @ 230V / 286W max
Electrical class: I
Self-resetting fuse protection
Meets CE safety standards

Die cast aluminium body
IP66
Operating temperature:
-40°C to 50°C (-40°F to 122°F)
Integrated electronic thermal protection management
Polar Edition, featuring an integrated de-icing system with electrically heated glass, available on request.
17.7 Kg

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE



ONYX XQ

FAÇADE LIGHTING

CODES

AL4436 ONYX XQ

AL4436	US	RW	PE
CODE	+ OPTICS	+ LED TYPE	+ OPTION

OPTICS

US Ultra spot

LED TYPE

RW RGBW
CW Cold white
WW Warm white
DW Dynamic white

OPTION


PE Polar edition

ACCESSORIES




AL4108 ANTIGLARE SHIELD

FEATURES AND OPTIONS

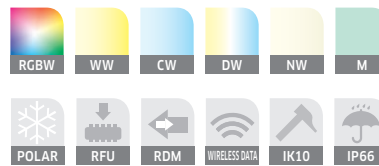

BEAM ANGLE REFERENCE

ULTRA SPOT 3.2°

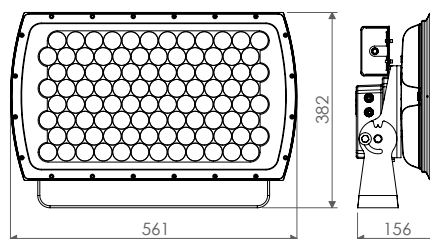

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE




> KUWAIT_Letter Tower, Kuwait City





FAÇADE LIGHTING

 GRIVEN

