



CAPITONYX 100

CAPITONYX 100



DESCRIPTION

Conceived to meet specific project requirements, CAPITONYX 100 is equipped with highly efficient ultra-spot optics which, in combination with a new generation of high-output LEDs, deliver outstanding performance in terms of intensity, uniformity, and consistency across long-throw applications. Its compact housing makes it ideally suited to a widerange of installations where limited mounting space offers little flexibility for achieving long-distance projection.


MAIN FEATURES

- Max. delivered lumen output: 4984 lm/ 67 lm/W
- Size: (HxWxD) 282x293.5x82 mm / 11.1x11.5x3.2"
- Control system: DMX-RDM, DALI DT8, DALI, remote wireless data
- Compact floodlight featuring efficient ultra-spot optics for long-shot effects with accurate beam angle definition


LED COLOUR CONFIGURATIONS




CAPITONYX 100

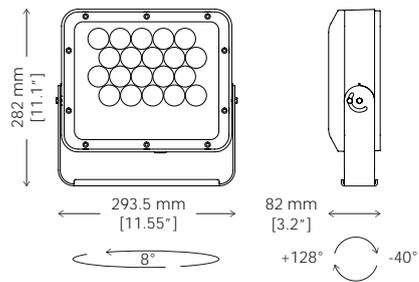

FEATURES

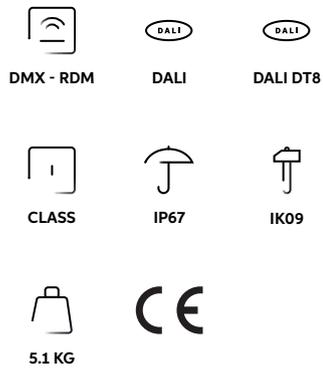


OPTIONS

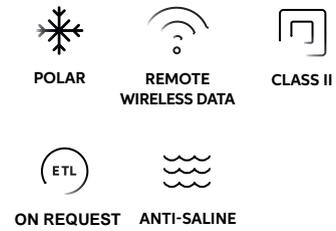

LED COLOUR CONFIGURATIONS



FINISHES

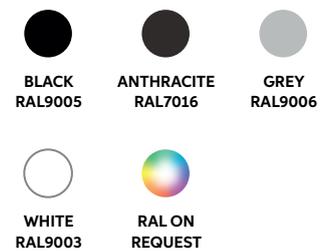

MORE INFO AVAILABLE AT GRIVEN.COM

CODE

AL6020 CAPITONYX 100

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
CAPITONYX 100 RGBW	74	2925	40
CAPITONYX 100 DW	74	4492	61
CAPITONYX 100 W	74	4984	67

BEAM ANGLE REFERENCE	RGBW	DW/W
ULTRA SPOT	2.8°	2.8°



Sweden – Björkbornsbron Bridge, Karlskoga