



CAPITONYX 600

CAPITONYX 600



DESCRIPTION

Standing out for its extraordinary performance capabilities, CAPITONYX 600 features an ultra-spot, long-shot beam of light capable of reaching remarkable distances with accurate beam angle definition. The full independent control of each LED bank allows absolute freedom in the creation of impressive matching or divergent dynamic effects on previously unreachable and remote spots with a surprising luminous output.


MAIN FEATURES

- Max. delivered lm output: 34390 lm / 64 lm/W
- Size: 517x756x150 mm / 20.4x29.7x5.9"
- Control system: DMX-RDM, DALI DT8, DALI, remote wireless data
- Double cluster floodlight with full independent control of each LED bank fitted with ultra-spot, long-shot beam lenses


LED COLOUR CONFIGURATIONS




CAPITONYX 600

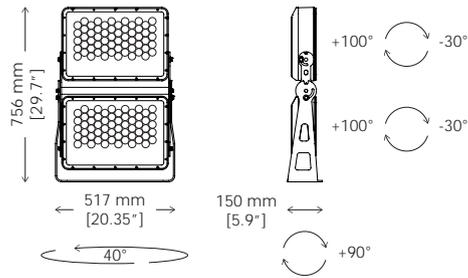

FEATURES

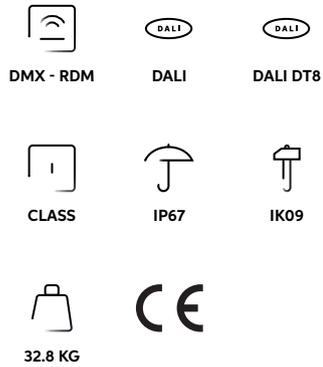


OPTIONS

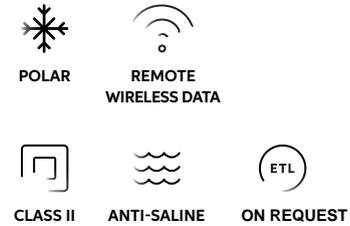

LED COLOUR CONFIGURATIONS



FINISHES



MORE INFO AVAILABLE AT GRIVEN.COM

CODE

AL6023 CAPITONYX 600

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
CAPITONYX 600 RGBW	536	19872	37
CAPITONYX 600 DW	536	30860	58
CAPITONYX 600 W	536	34390	64

BEAM ANGLE REFERENCE	RGBW	DW/W
ULTRA SPOT	2.8°	2.8°



Germany – TK Elevator test tower, Rottweil