



DS PRO

DS PRO



DESCRIPTION

Conceived by Dark Source and Eryri National Park, DS PRO is a decorative and functional warm white light applique specific for architectural environments where precise light control and refined aesthetics are essential. Featuring an integrated DALI-2 dimmable driver, it is available in two versions following the DarkSky classification: Commercial (with a lumen output exceeding 1,000 lm) and Residential (with an output below 1,000 lm). Three different installation systems can be selected: wall mounting, corner wall mounting, and linear wall mounting. An elegant lantern, with or without a screen further enhances both its aesthetic and functional versatility.

APPLIQUES


MAIN FEATURES

- Max. delivered lm output:
DS PRO Commercial: 1399 lm / 101 lm/W
DS PRO Residential: 999 lm / 101 lm/W
- Size: ø 121 mm 150x85 mm
- Control system: DALI-2 with on-board PSU
- Warm white light applique designed in accordance with DarkSky principles to provide targeted glare-free lighting for façades and pathways in both commercial and residential settings


LED COLOUR CONFIGURATIONS




DS PRO

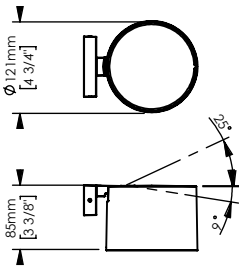




WM WALL-MOUNTING

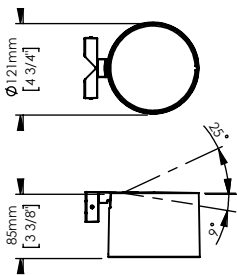

CM CORNER WALL-MOUNTING

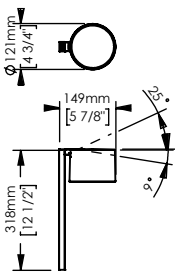

LM LINEAR WALL-MOUNTING




WM WALL-MOUNTING +
AL5462 AL5463

CM CORNER WALL-MOUNTING +
AL5462 AL5463

LINEAR WALL-MOUNTING +
AL5462 AL5463



FEATURES



OPTIONS



LED COLOUR CONFIGURATIONS

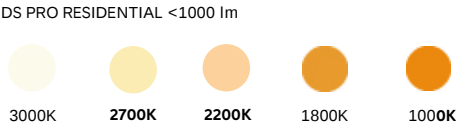

MORE INFO AVAILABLE ON OUR WEBSITE

CODE

AL5456 DS PRO Commercial
AL5459 DS PRO Residential

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
DS PRO Commercial (3000K)	13.8	1399	101
DS PRO Residential (3000K)	9.9	999	101

BEAM ANGLE REFERENCE	WHITE LIGHT
NARROW	18°
MEDIUM	25°
WIDE	35°
EXTRA WIDE	50°
ELLIPTICAL	22°x65°
PRISMATIC DIFFUSER	96°

