



DUNE MK3

RECESSED APPLICATIONS

With its IP68 rating and 9° beam angle orientation adjustment, **DUNE MK3** is a highly performing LED light fixture in AISI 316L stainless steel, specifically designed for exterior recessed applications. The 2000 Kg deadweightload capacity makes it suitable for in-ground applications also in vehicular areas.




D U N E M K 3

GRIVEN 

DUNE MK3

GRIVEN 

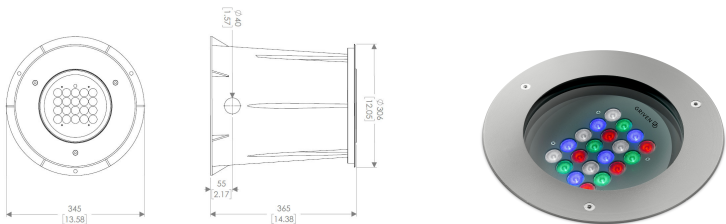

+/- 9° TILT

BEAM ANGLE REFERENCE

RGBW		WHITE LIGHT	
SPOT	7°	SPOT	12°
NARROW	12°	NARROW	15°
MEDIUM	21°	MEDIUM	25°
WIDE	43°	WIDE	47°
EXTRA WIDE	66°	EXTRA WIDE	61°
ELLIPTICAL	11°x40°	ELLIPTICAL	14°x39°
ELLIPTICAL WIDE	20°x40°	ELLIPTICAL WIDE	23°x37°

PHOTOMETRIC DETAILS AVAILABLE ON OUR WEBSITE

FEATURES AND OPTIONS



ACCESSORIES



AL1321 INFRARED
REMOTE CONTROL



AL8203 ANTIGLARE
(only for white light versions)

CODES

AL5300 DUNE MK3

AL8349 FORMWORK

OPTICS

SP	Spot	RN	RGB+W 4000K
NA	Narrow	DW	From 2700K to 6500K
ME	Medium	65	Cold White 6500K
WI	Wide	40	Natural White 4000K
EW	Extra wide	30	Warm White 3000K
EL	Elliptical		
WL	Elliptical Wide		

LED TYPE

OPTIONAL

P Polar Edition

NOTES

Unless an RDM compatible control is used, DUNE MK3 must always be purchased with AL1321 Infrared Remote Control. More DUNE MK3 units can be controlled with one AL1321. The formwork code AL8349 must be purchased separately.

TECHNICAL SPECIFICATIONS

DUNE MK3 is an IP68 in-ground luminaire, whose AISI 316L stainless steel body and flange host 20 high brightness RGBW, Dynamic white, Cold White, Natural White, Warm White or, on request ,monochrome power LEDs. Dimensions: Ø 345 mm x 365 mm depth. Available in DMX, automatic and Master-Slave mode, it also features RFU (Remote firmware update) and RDM (Remote device management) functions. Unless an RDM compatible control is used, one Infrared Remote Control AL1321 must always be purchased for one or more DUNE MK3 units in order to access DMX addressing, stand-alone operations and DMX channels configurations. Power supply: standard 100-240V / 50-60Hz. Power consumption: 0.16A@ 230V / 27W max. An Electrical Class I appliance, it also features self-resetting fuse protection as well as integrated electronic thermal protection management. A 2000 Kg deadweight load capacity makes it suitable for in-ground applications even in vehicular areas. Beam angle orientation adjustment of +/- 9° (TILT). Operating temperature: -40°C to 50°C (-40°F to 122°F).

DIGITAL CONTROL SYSTEM SPECIFICATIONS AND CONFIGURATIONS AVAILABLE ON OUR WEBSITE

