





GRAPH-I-PIX OPALINE

GRAPH-I-PIX OPALINE



DESCRIPTION

Fitted with an opaline diffuser for a surprisingly seamless colour transitioning, GRAPH-i-PIX Opaline is capable of reproducing almost any graphic visual concept on large scale façades, where more modules can comfortably be set up for a uniform pattern layout. Perfectly blending with any architectural environment owing to its ultra-slim profile, this striking direct-view advanced lighting solution stands out for its functionality and versatility. GRAPH-i-PIX Opaline is available in three lengths which can be selected in different configurations of individually addressable pixels for customisable resolution and optimal optic outcome.

MAIN FEATURES


- Max. delivered lm output:
30: 125 lm / 25 lm/W
50: 185 lm / 25 lm/W
100: 370 lm / 25 lm/W
- Size: 30 (LxWxD) 299x30x49 mm / 11.8x1.2x1.9"
- Size: 50 (LxWxD) 499x30x49 mm / 19.6x1.2x1.9"
- Size: 100 (LxWxD) 999x30x49 mm / 39.3x1.2x1.9"
- Control system: DMX-RDM, DMX, self-addressing
- Ultra-slim profiles featuring 1, 2, 4 or 8 individually addressable pixels (1 pixel=6 LEDs) for the creation of almost any graphic visual concept on large scale façades

LED COLOUR CONFIGURATIONS



GRAPH-I-PIX

OPALINE

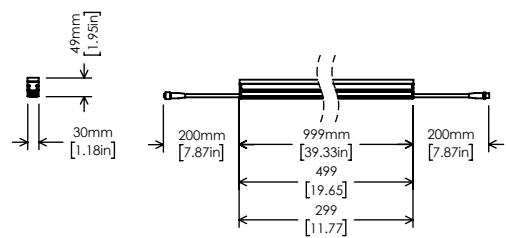

FEATURES


DMX - RDM


DMX


SELF-ADDR


INDEPEDENT
PIXEL


CLASS


IP66


IK08



OPTIONS


ETL PENDING

LED COLOUR CONFIGURATIONS


RGB+W
3000K


RGB+W
4000K


RGB


DW
2700/6500K


4000K


3000K


2700K


2200K

MORE INFO ON OUR WEBSITE

CODES

AL6029 GRAPH-I-PIX OPALINE 30
AL6028 GRAPH-I-PIX OPALINE 50
AL6027 GRAPH-I-PIX OPALINE 100

PERFORMANCE	WATT	MAX LM OUTPUT	LM WATT
GRAPH-I-PIX OPALINE 30 RGBW	5	70	15
GRAPH-I-PIX OPALINE 30 RGB	5	48	12
GRAPH-I-PIX OPALINE 30 DW	5	125	25
GRAPH-I-PIX OPALINE 30 W	5	125	25
GRAPH-I-PIX OPALINE 50 RGBW	7.5	110	15
GRAPH-I-PIX OPALINE 50 RGB	7.5	70	12
GRAPH-I-PIX OPALINE 50 DW	7.5	185	25
GRAPH-I-PIX OPALINE 50 W	7.5	185	25
GRAPH-I-PIX OPALINE 100 RGBW	15	220	15
GRAPH-I-PIX OPALINE 100 RGB	15	140	12
GRAPH-I-PIX OPALINE 100 DW	15	370	25
GRAPH-I-PIX OPALINE 100 W	15	370	25

	BEAM ANGLE REFERENCE	PIXEL PITCH
GRAPH-I-PIX OPALINE 30	110°	(6 LEDs): 150 mm (min.)
GRAPH-I-PIX OPALINE 50	110°	(6 LEDs): 125 mm (min.)
GRAPH-I-PIX OPALINE 100	110°	(6 LEDs): 125 mm (min.)

