





# HALF MOON DOWNLIGHT

HALF MOON DOWNLIGHT



## DESCRIPTION

HALF MOON DOWNLIGHT is an extremely compact, ceiling-recessed, dark light LED luminaire that provides a natural and discreet lighting setup for ambient lighting applications. Its external PSU and shallow recess depth allow for comfortable installation even in the smallest spaces. It is the perfect fit for functional or decorative enhancement in delicate pastel tones or intense white shades of entrances, porches, and patios in both hospitality and residential structures. It is available in two configurations, Trim and Trimless, for an appealing flush-mount installation in ceilings, false ceilings, or projecting roofs.


## MAIN FEATURES

- Max. delivered lm output: 273 lm / 91 lm/W
- Size: (WxD):  $\varnothing$  50x70 mm /  $\varnothing$  1.97x2.75"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V with remote PSU, remote wireless data
- Extremely compact ceiling-recessed downlight for decorative or functional illumination available in Trim and Trimless versions


## LED COLOUR CONFIGURATIONS



# HALF MOON DOWNLIGHT

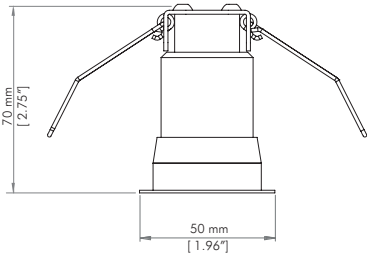



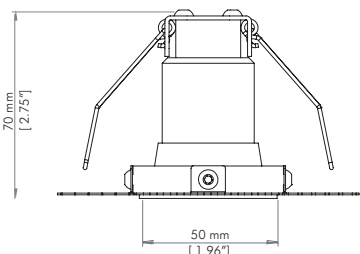






TRIM



TRIMLESS

## FEATURES

-   
DMX - RDM
-   
DALI
-   
ON - OFF
-   
0 - 10 V
-   
IP66
-   
IK10
-   
CLASS
-   
UGR < 19
-   
0.2 KG



## LED COLOUR CONFIGURATIONS

-   
RGB+W  
3000K
-   
RGB+W  
4000K
-   
DW  
2700/6500K
-   
WARM  
WHITE 2200K
-   
WARM  
WHITE 2700K
-   
WARM  
WHITE 3000K
-   
NATURAL  
WHITE 4000K


MORE INFO AVAILABLE ON OUR WEBSITE

## CODES

AL5319 T HALF MOON DOWNLIGHT TRIM  
AL5319 S HALF MOON DOWNLIGHT TRIMLESS

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
HALF MOON DOWNLIGHT RGBW	2	18	9
HALF MOON DOWNLIGHT DW	2	32	16
HALF MOON DOWNLIGHT W	3	273	91

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
OPALINE DIFFUSER	120°	–
NARROW	–	12°
MEDIUM	–	23°
ELLIPTICAL	–	14° x 38°

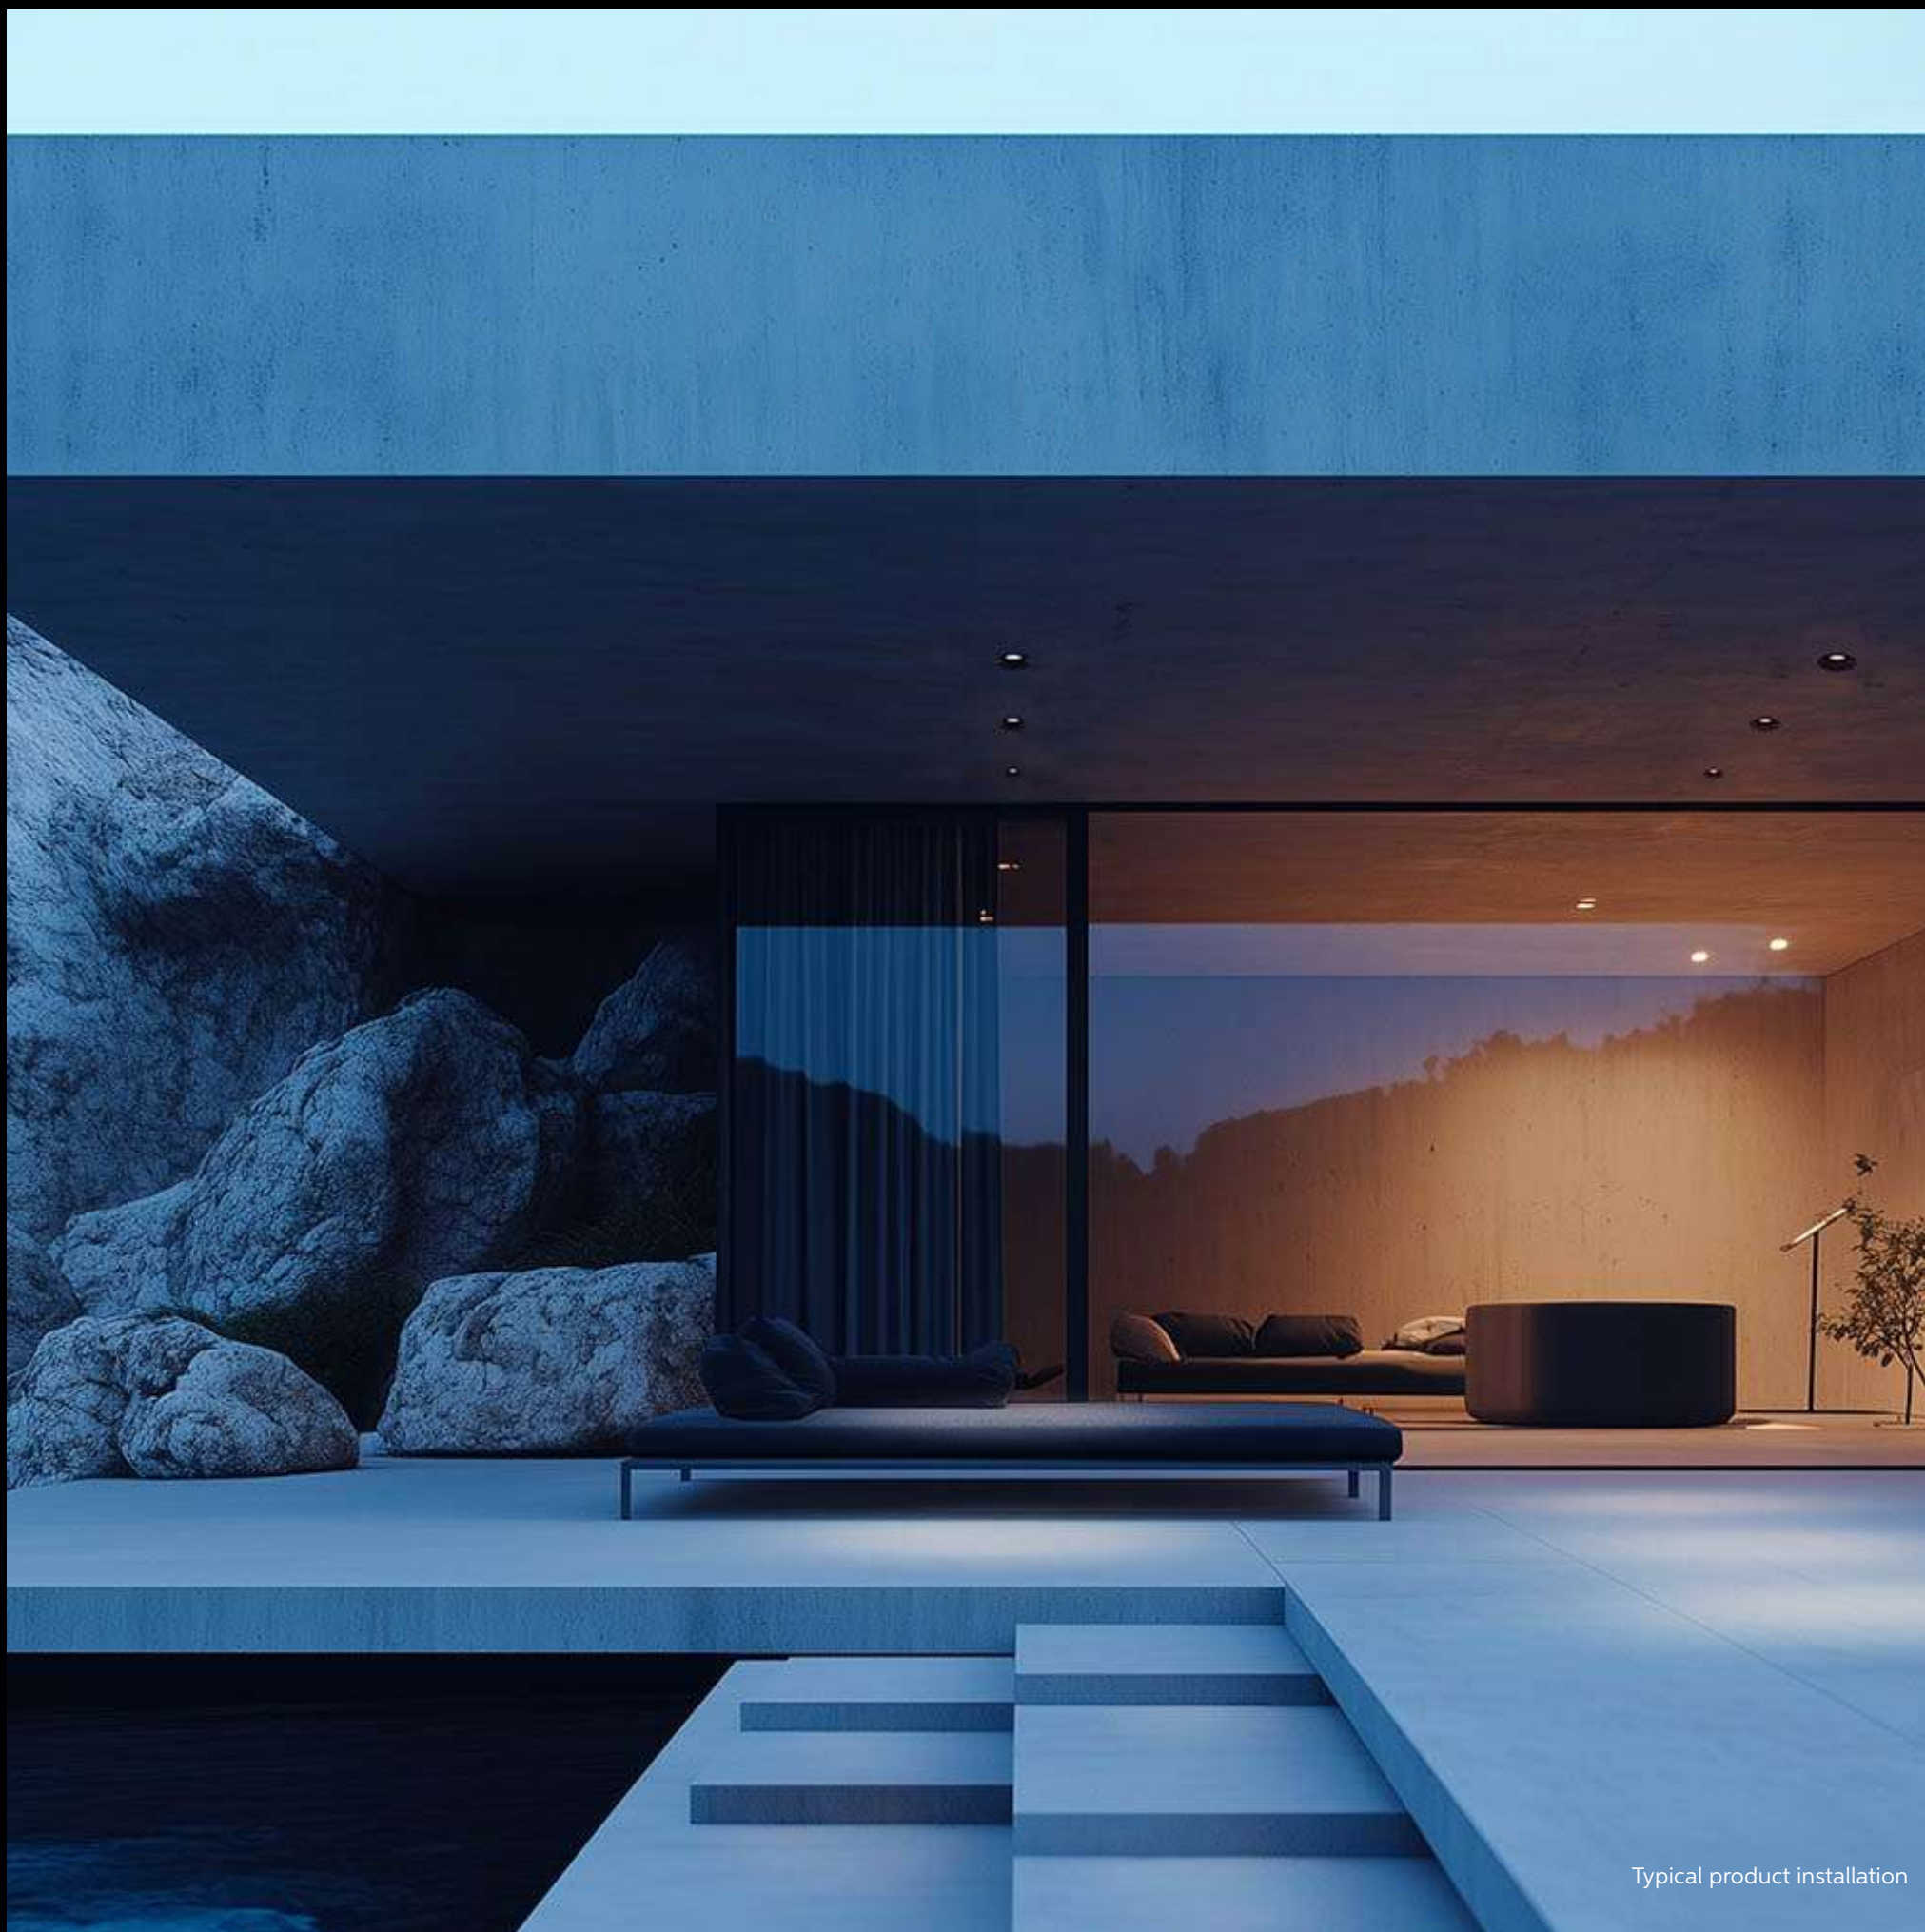

Typical product installation