




HALF MOON DOWNLIGHT

HALF MOON DOWNLIGHT

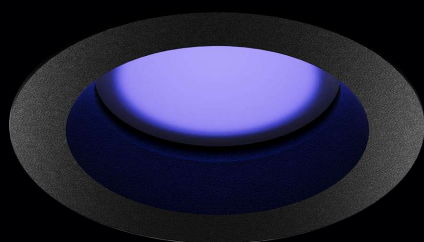

DESCRIPTION

HALF MOON DOWNLIGHT is an extremely compact, ceiling-recessed, dark light LED luminaire that provides a natural and discreet lighting setup for ambient lighting applications. Its external PSU and shallow recess depth allow for comfortable installation even in the smallest spaces. It is the perfect fit for functional or decorative enhancement in delicate pastel tones or intense white shades of entrances, porches, and patios in both hospitality and residential structures. It is available in two configurations, Trim and Trimless, for an appealing flush-mount installation in ceilings, false ceilings, or projecting roofs.


MAIN FEATURES

- Max. delivered lm output: 273 lm / 91 lm/W
- Size: (WxD): \varnothing 50x70 mm / \varnothing 1.97x2.75"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V with remote PSU, remote wireless data
- Extremely compact ceiling-recessed downlight for decorative or functional illumination available in Trim and Trimless versions


LED COLOUR CONFIGURATIONS



HALF MOON DOWNLIGHT

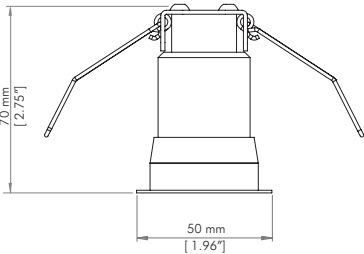



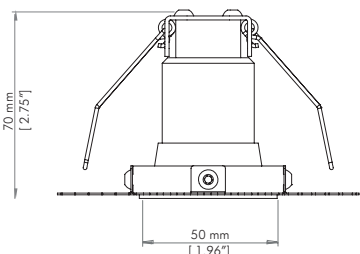






TRIM



TRIMLESS

FEATURES

- 
DMX - RDM
- 
DALI
- 
ON - OFF
- 
0 - 10 V
- 
IP66
- 
IK10
- 
CLASS
- 
UGR < 19
- 
0.2 KG



LED COLOUR CONFIGURATIONS

- 
RGB+W
3000K
- 
RGB+W
4000K
- 
DW
2700/6500K
- 
WARM
WHITE 2200K
- 
WARM
WHITE 2700K
- 
WARM
WHITE 3000K
- 
NATURAL
WHITE 4000K

MORE INFO AVAILABLE ON [GRIVEN.COM](https://griven.com)

CODES

AL5319 T HALF MOON DOWNLIGHT TRIM
AL5319 S HALF MOON DOWNLIGHT TRIMLESS

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
HALF MOON DOWNLIGHT RGBW	2	18	9
HALF MOON DOWNLIGHT DW	2	32	16
HALF MOON DOWNLIGHT W	3	273	91

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
OPALINE DIFFUSER	120°	–
NARROW	–	12°
MEDIUM	–	23°
ELLIPTICAL	–	14° x 38°



AI generated images of a typical product installation