



HALF MOON P

HALF MOON P



DESCRIPTION

Available in both mono- and bi-emission versions, HALF MOON P is a compact wall-mounted applique distinguished by its impressive aesthetic appeal and exceptional versatility. A variety of optics and white light colour temperatures enables diverse ambient lighting effects, creating a deep emotional impact on façades and walls of private residences or hospitality venues of any size.

MAIN FEATURES


- Max. delivered lm output: 546 lm / 109 lm/W
- Max. size: ø 48mm H 95 mm / Ø 1.88" H 3.7"
- Control system: DALI, ON-OFF or 0-10V according to the chosen remote PSU
- Compact wall applique available in both mono- and bi-emission versions

LED COLOUR CONFIGURATIONS



WALL MOUNT


HALF MOON P

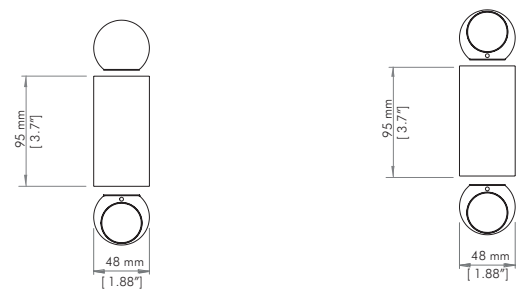


HALF MOON P
MONO-EMISSION

HALF MOON P
BI-EMISSION


FEATURES




DALI




ON - OFF




0 - 10 V




IP66




IK10



CLASS



0.45 KG



OPTIONS




BEEHIVE
FILTER




ETL VERSION


LED COLOUR CONFIGURATIONS




2200K



2700K



3000K



4000K


MORE INFO AVAILABLE ON OUR WEBSITE [GRIVEN.COM](https://www.griven.com)

CODES

AL5387 HALF MOON P MONO-EMISSION
AL5388 HALF MOON P BI-EMISSION

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
Mono-emission configurations			
HALF MOON P W	3	273	91
Bi-emission configurations			
HALF MOON P W	5	546	109

BEAM ANGLE REFERENCE	WHITE
NARROW	12°
MEDIUM	23°
WIDE	43°
ELLIPTICAL	14°x38°
OPALINE GLASS	120°

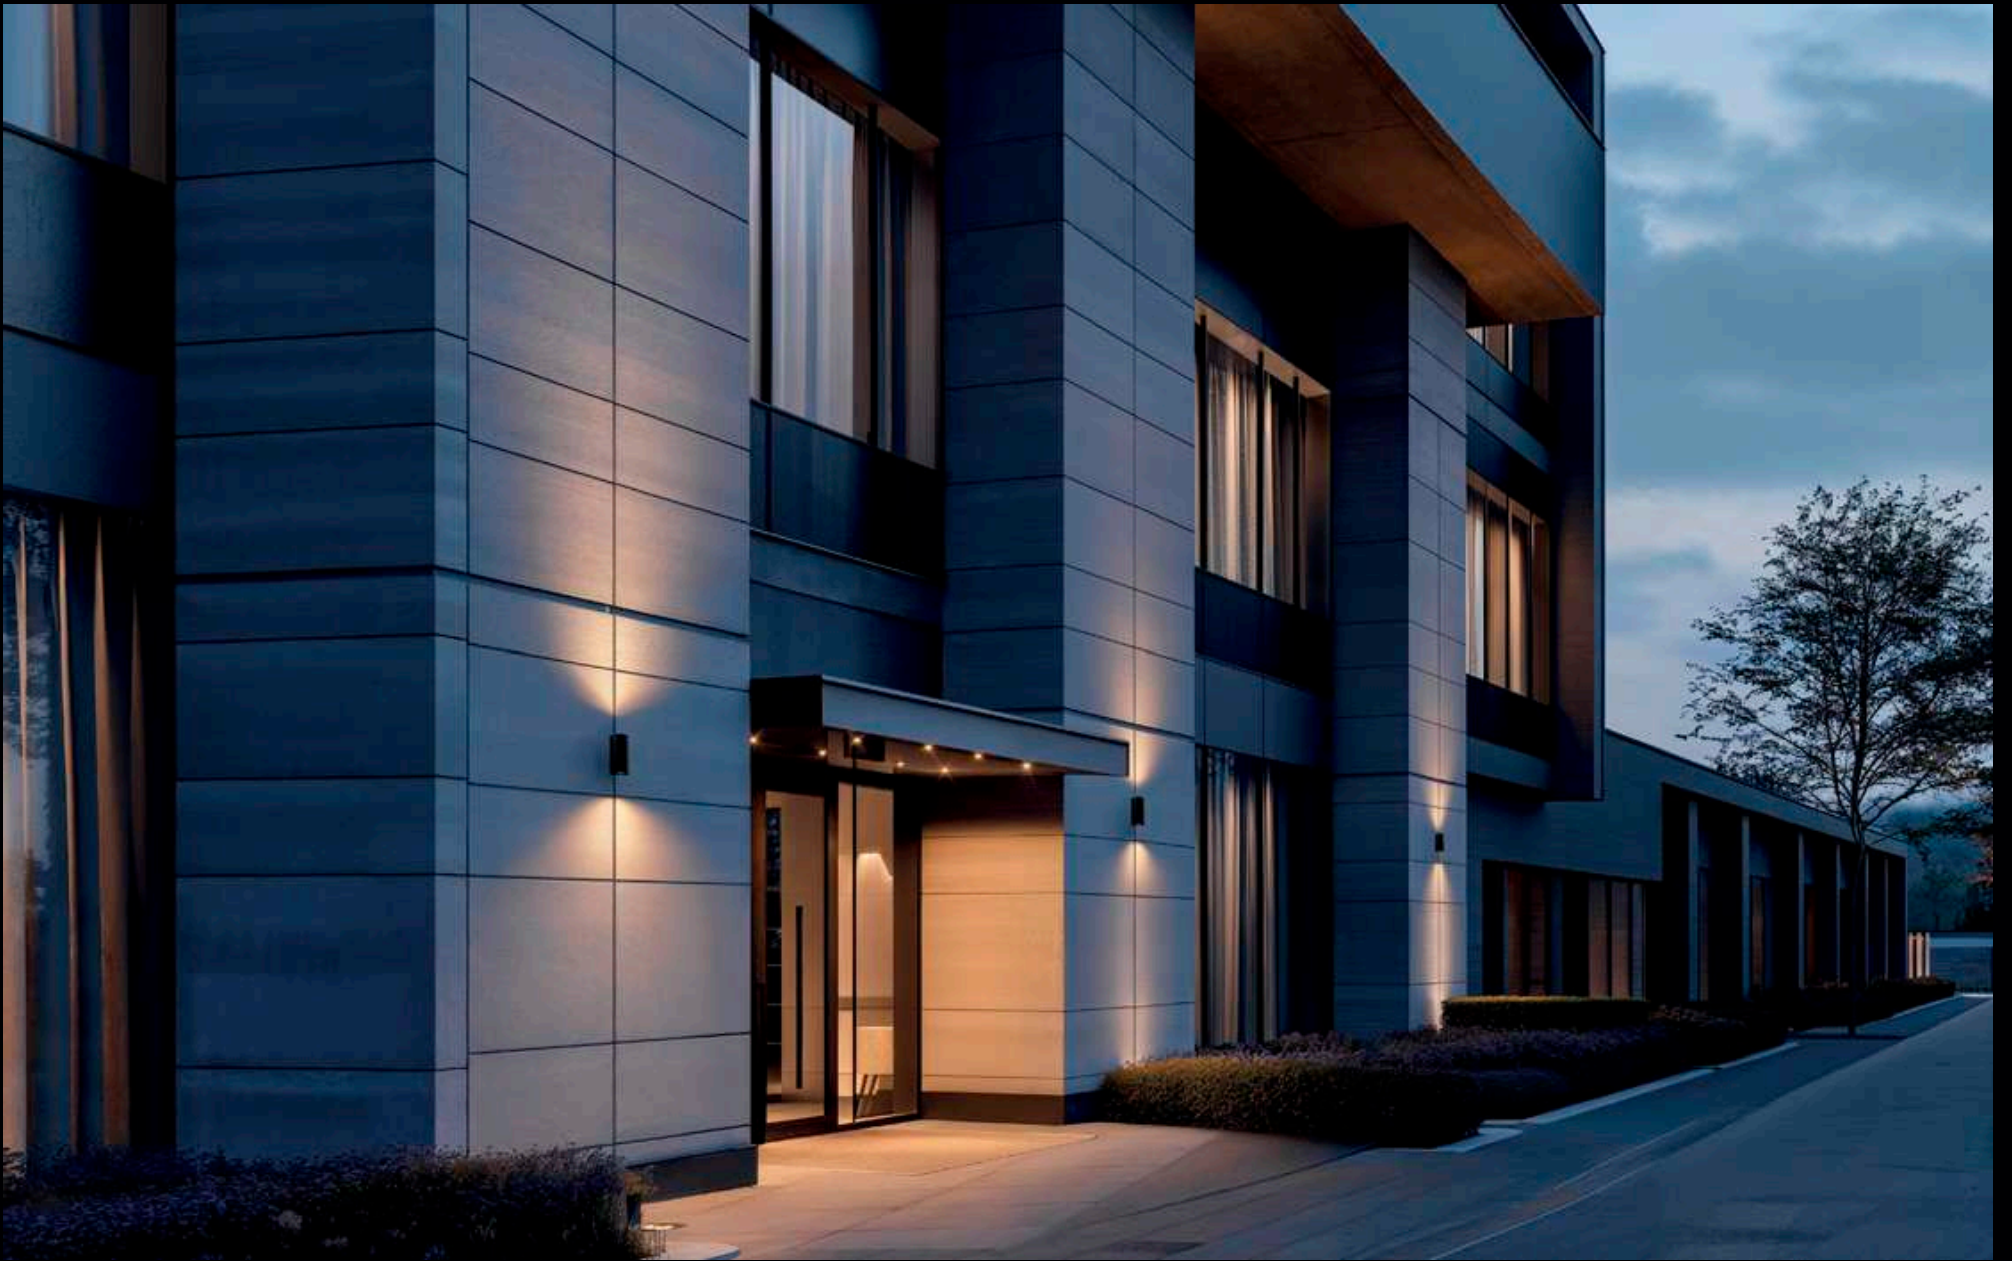

AI generated image of a typical product installation