



ETERNITY HOTEL

MOON P

MOON P



DESCRIPTION

Standing out for its remarkable performance and aesthetic appeal, MOON P is available in mono- and bi-emission versions, with a Class II rating and an onboard DMX-RDM or DALI 2 driver. Its powerful light output delivers well-defined beams in coloured or white tones, reaching up to three storeys both upwards and downwards while ensuring the utmost visual comfort. Enhancing the façades of residential, hospitality, and public spaces with elegance and refined taste, this versatile wall-mounted luminaire features an IP66 protection rating and is available in four standard finishes.

MAIN FEATURES


- Max. delivered lm output:
Bi-Emission: 1255 lm / 120 lm/W
Mono-Emission: 628 lm / 120 lm/W
- Size: ø 80 mm H 250 mm / Ø 3.14" H 9.84"
- Control system: DMX-RDM, DALI, ON-OFF with on-board power supply
- Wall-mounted luminaire available in both mono- and bi-emission versions working with on-board PSU

LED COLOUR CONFIGURATIONS



APPLIQUES


MOON P

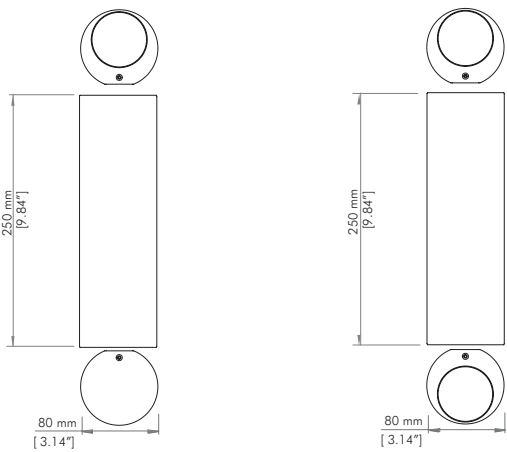


MOON P
MONO-EMISSION

MOON P
BI-EMISSION


FEATURES

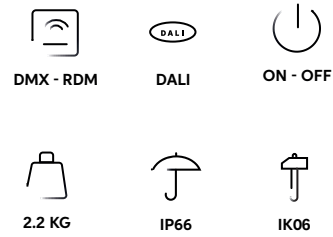

OPTIONS



LED COLOUR CONFIGURATIONS

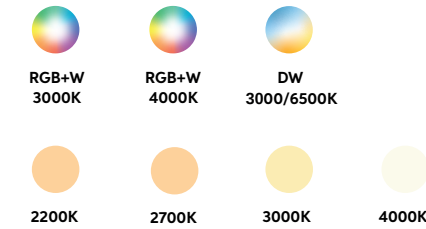

MORE INFO AVAILABLE ON OUR WEBSITE

CODES

AL5401 MOON P MONO-EMISSION
AL5402 MOON P BI-EMISSION

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
MOON P RGBW Mono-Emission	8.8	214	25
MOON P DW Mono-Emission	8.8	367	42
MOON P W Mono-Emission	6	628	105
MOON P RGBW Bi-Emission	17.5	429	25
MOON P DW Bi-Emission	17.5	734	42
MOON P W Bi-Emission	10.5	1255	120

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
NARROW	13°	14°
MEDIUM	23°	25°
WIDE	35°	37°
ELLIPTICAL	25°x60°	22°x65°
OPALINE GLASS	120°	120°

