



MOON P RP

MOON P RP



DESCRIPTION

Distinguished by its remarkable performance and aesthetic appeal, Moon P RP is available in both mono- and bi-emission versions with remote PSU. It delivers powerful light output with well-defined beams in a full range of colour and white tones, reaching up to three floors both upwards and downwards with optimal visual comfort. Enhancing façades in residential, hospitality, and public settings with elegance and refinement, this versatile applique features an IP66 protection rating and is offered in four standard finishes.

MAIN FEATURES


- Max. delivered lm output: 1796 lm / 120 lm/W
- Max. size: ø 80 mm H 120 mm / Ø 3.14" H 4.7"
- Control system: DMX-RDM, DALI, ON-OFF, 0-10V with separate power supply
- Wall-mounted applique for decorative or functional illumination of façades and walls in private residences or hospitality settings, available in mono- or bi-emission

LED COLOUR CONFIGURATIONS



APPLIQUES


MOON P RP

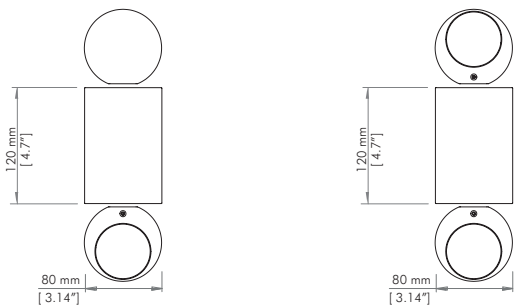


MOON P RP
MONO-EMISSION

MOON P RP
BI-EMISSION


FEATURES




DMX - RDM




DALI




ON - OFF




0 - 10 V




IP66




IK08



CLASS



1.5 KG
MONO-EMISSION



1.2 KG
BI-EMISSION



LED COLOUR CONFIGURATIONS



RGB+W
3000K



RGB+W
4000K



DW
3000/6500K



WARM
WHITE 2200K



WARM
WHITE 2700K



WARM
WHITE 3000K



NATURAL
WHITE 4000K

MORE INFO AVAILABLE ON OUR WEBSITE

CODES

AL5385 MOON P RP MONO-EMISSION
AL5386 MOON P RP BI-EMISSION

PERFORMANCE	WATT	MAX LM OUTPUT	LM/WATT
MOON P RP RGBW	8 / 16	21/428	27
MOON P RP DW	8 / 16	367/734	46
MOON P RP W	7.5 / 15	898/1796	120

BEAM ANGLE REFERENCE	RGBW/DW	WHITE
NARROW	13°	18°
MEDIUM	23°	25°
WIDE	35°	35°
EXTRA WIDE	56°	50°
ELLIPTICAL	25°x60°	22°x65°
OPALINE GLASS	120°	120°



AI-generated images of a typical product installation